DCM product information sheet

Product Specifications

Fits most: 23" - 42" flat panels Supports up to: 400 lbs (181.4 kg)

Tilt: 0 to +30°


VESA compliant: 100x200, 200x200

Color: Black

Product Benefits

- Supports two panels for back-to-back mounting
- Portrait or landscape orientation
- Tension adjustment for variable tilt or locking pin mechanism for precise positioning in 5° increments
- Integrated cable management routes cables through NPT pipe and ceiling plate
- Lift n' Lock[™] for quick installation
- Includes 24" of 1.5" NPT
- Threaded bottom pipe for additional accessories
- Includes ceiling plate
- Anti-theft security feature
- Includes complete Grade 5 hardware kit
- NPT extension pipes available in 12", 18" and 24" lengths



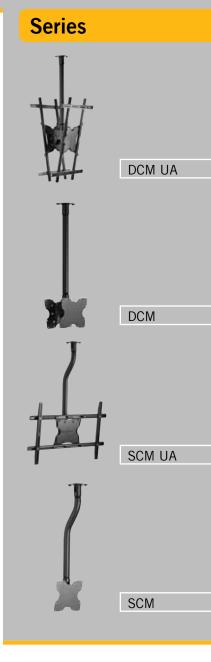



The DCM is equipped with a pin tilt mechanism which tilts the panel at precise increments making it well-suited for single or multiple panels



Dedicated to being a one-stop shop for professional products, OmniMount remains on the cutting edge of product innovation. That's why we're the natural choice for any professional, industrial or commercial application. Together, our four professional grade ceiling mounts provide single or back-to-back mounting options. The DCM is a sturdy double flat panel ceiling mount, that allows flat panels or digital signage to be seen from multiple locations.



DCM technical data sheet



Dedicated to being a one-stop shop for professional products, OmniMount remains on the cutting edge of product innovation. That's why we're the natural choice for any professional, industrial or commercial application. Together, our four professional grade ceiling mounts provide single or back-to-back mounting options. The DCM is a sturdy double flat panel ceiling mount, that allows flat panels or digital signage to be seen from multiple locations.

Product Specifications

Fits most: 23" - 42" flat panels Supports up to: 400 lbs (181.4 kg)

Tilt: 0 to +30°

VESA compliant: 100x200, 200x200

Color: Black

Product Benefits

- Supports two panels for back-to-back mounting
- Portrait or landscape orientation
- Tension adjustment for variable tilt or locking pin mechanism for precise positioning in 5° increments
- Integrated cable management routes cables through NPT pipe and ceiling plate
- Lift n' Lock[™] for quick installation
- Includes 24" of 1.5" NPT
- Threaded bottom pipe for additional accessories
- Includes ceiling plate
- Anti-theft security feature
- Includes complete Grade 5 hardware kit
- NPT extension pipes available in 12", 18" and 24" lengths




| | Stock Code | Packaging UPC | MC UPC |
|---------------|-------------|---------------|--------|
| Americas | 1003434FE-1 | 728901018015 | NA |
| International | 1003770-1 | 728901020377 | NA |


| Box Contents | Qty |
|--|-----|
| Ceiling plate | 1 |
| Straight pipe | 1 |
| Tilt hanger | 1 |
| Adapter plate | 2 |
| Complete mount installation hardware kit | 1 |
| Complete panel attachment hardware kit | |
| Instruction manual | 1 |
| Flat panel compatibility chart | 1 |


| | Dimensions WxDxH Inches (mm) | Wt lbs (kg) |
|----------------------|---------------------------------|-------------|
| Product Box | 32.4 x 21.9 x 4.9 (822x556x124) | 28 (12.7) |
| Master Carton | NA | NA |


DCM line drawing



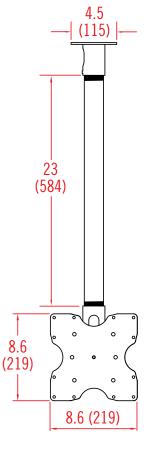



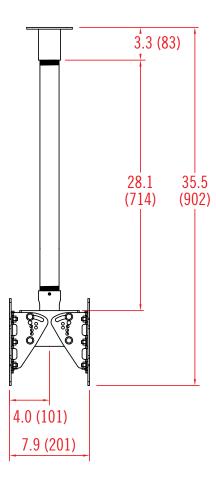

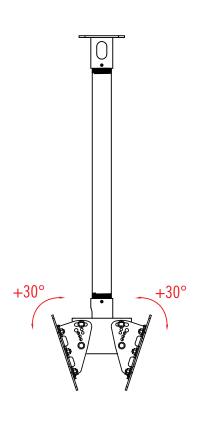

CUL) US LUSTED

inches (mm)

Architects Specifications

The flat panel ceiling mount shall be an OmniMount model DCM and shall be located where indicated on the plans. It shall be constructed of sheet metal with $+30^{\circ}$ adjustable forward tilt. Assembly and installation shall be done according to instructions provided by the manufacturer.