



DEZ16T022-B

Vandal Indoor/Outdoor PTZ Camera 22x Optical Zoom




Features:

- Day & Night mode: Color converts to B/W in low light with an IR cut filter removal (ICR) function
- 22X optical zoom / 11X digital zoom
- 1/4" Sony Super HAD CCD™
- Combines superior imaging with a vandal-proof housing
- DVR remote control via RS485
- Pan: 360° Endless, Tilt: 0° ~ 90°
- Pan/Tilt Speed (Manual; max. 150°/sec, Auto: max. 375°/sec)
- Up to 60 programmable preset positions
- Up to 63 selectable camera addresses
- Rugged, compact specially designed for interior/exterior applications (Weatherproof - IP66 Rated)
- Dual power operation (12V DC / 24V AC)

Product Information:

UPC:	8-41430-00555-1
Package Weight:	1.65kg / 3.7lbs
Package Dimensions: (W x D x H)	214mm x 211mm x 208mm 8.4" x 8.3" x 8.2"
Package Cube:	0.0094cbm / 0.332cu ft

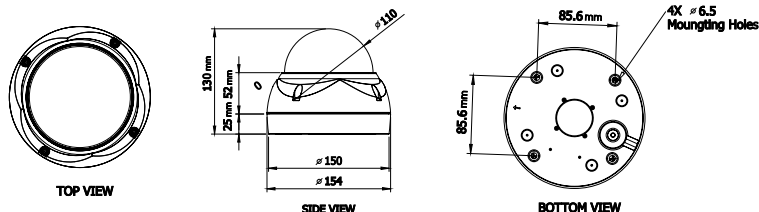

Specifications:

MODEL		
POWER	Power Source	DC 12V / AC 24V ±10%
	Power Consumption	6.0 Watts
GENERAL	Image Sensor	1/4" SONY Super HAD CCD
	Total Pixels	811(H) X 508(V)
	Scanning System	2:1 Interlace
	Scanning Frequency	15.734KHz(H), 59.94Hz(V)
	Sync. System	Internal / Line Lock
	Resolution	480 TV lines(COLOR), 530 TV lines(B/W)
	Min. illumination	0.5 lux (Color), 0.05 lux (B/W), 0.001 lux (Low-shutter)
	Video Output	1.0 Vp-p (75 ohm, composite)
	S/N Ratio	more than 50dB (AGC off)
	Camera Control	RS485 (Pelco D, Pelco P, FastraxII)
	FUNCTION CAMERA	Focus Mode
		Distance
		Digital Zoom
		White Balance
		Auto Exposure
		Shot
		Shutter Speed
		Iris Control
		Gain Control
		BLC
		Brightness
		Sharpness
		Picture
		D&N Control
	FUNCTION DOME	Panning Angle
		Panning Speed
		Tilting Angle
		Tilting Speed
		Preset Speed
		Preset
		Tour
		Auto Scan
		Area Title
		Alarm Input
		Alarm Output
		Alarm State
		Home Function
		Password Protection
	LENS	Dome ID
		Zoom Ratio
		Focus Length
CONNECTOR & ETC	Aperture Ratio	F1.6 (wide) ~ F3.7 (tele)
	Power Input	2-pin terminal block
	Video Output	BNC connector
	RS485 Control	2-pin terminal block
	External Input/Output	4-pin terminal block
	Operating Temperature	-10°C ~ +45°C / 14°F ~ 113°F
	Operating Humidity	0 ~ 96% (non-condensing)
	External Dimension	Ø154.0 x 130 (H) mm (Bubble diameter Ø110.0)
	Weight	1300g

Optional Accessories:

ACCKBD150

Keyboard Controller




MNTV1XWC

Wall/Ceiling Mount



MNTV1XP

Pole Mount



MNTV1XR

Corner Mount



DIGIMERGE®

Digimerge Technologies Inc.
250 Royal Crest Court, Markham, ON Canada L3R 3S1
Tel: 905.946.8477 Fax: 905.947.0138

Because our products are subject to continuous improvement, Digimerge reserves the right to modify product design and specifications without notice and without incurring any obligation. E&O.E.

2-01122009