


DS-2CC102/112/192P(N)-IR Color IR Camera



- Compact design
- 1/3" Sony CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Unit: mm

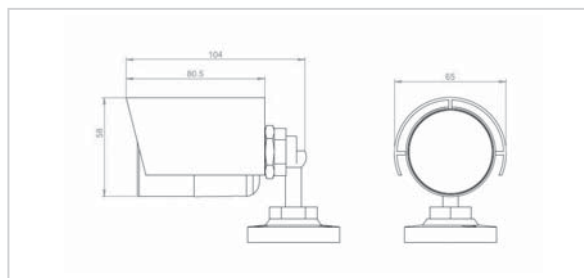

Specifications

		DS-2CC102P(N)-IR	DS-2CC112P(N)-IR	DS-2CC192P(N)-IR
Camera	Image Sensor	1/3 inch SONY Super HAD CCD		
	Effective Pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)
	Horizontal Resolution	420TVL	480TVL	540TVL
	Signal System	PAL / NTSC		
	Min. Illumination	0.1Lux @ F1.2 (0 LUX with IR)		
	Electronic Shutter	1/50 (1/60)s to 1/100,000s		
	Synchronization	Internal Synchronization		
	Video Output	1Vp-p Composite Output (75Ω / BNC)		
	S/N Ratio	More than 48 dB		
Lens	BLC	ON		
	Lens	6mm (3.6mm, 2.8mm option)		
General	IR Distance	Approx 10 to 20 meters		
	Water and Dust Resistance	IP66		
	Power Supply	12VDC ±10%		
	Power Consumption	3W MAX		
	Working Temperature	-10°C ~ 60°C		
	Dimensions(mm)	Φ58 × 80.5 (Φ2.3" × 3.2")		
	Weight	250g (0.55lbs)		

Available Models

DS-2CC102P-IR, DS-2CC102N-IR, DS-2CC112P-IR, DS-2CC112N-IR, DS-2CC192P-IR, DS-2CC192N-IR