



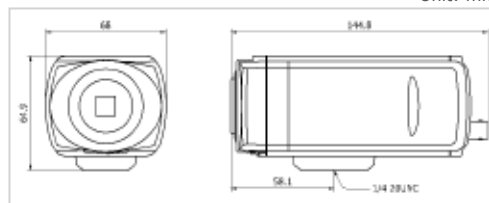

Indoor

DS-2CC191N-A High Definition Box Camera

- 1/3" SONY CCD
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control, and backlight compensation
- Auto iris with DC/video driver
- CS lens mount (provide adapter for C mount lens)
- Internal or power synchronization

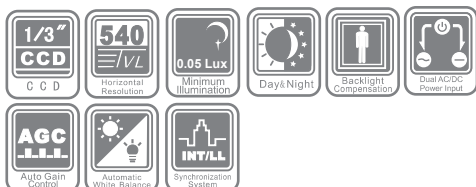

Specifications

		DS-2CC191N-A
Camera	Image Sensor	1/3" SONY CCD
	Signal System	NTSC
	Effective Pixels	NTSC: 768 (H) × 494 (V)
	Min. Illumination	0.05 Lux @ (F1.2, AGC ON)
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
	Lens Mount	C/CS mount
	Auto Iris	DC/Video drive
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal/Power synchronization
	Video Output	1Vp-p composite output(75 Ω/BNC)
	S/N Ratio	More than 50 dB
General	BLC	On / Off
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	24 V AC ± 10%, 12 V DC ± 10%
	Power Consumption	Max. 3 W
	Dimension (WxHxD)	68 × 64.9 × 144.8 mm (2.68" × 2.56" × 5.70")
	Weight	500 g (1.10 lbs)

Accessories



DS-1212ZJ (prev. DS-1212ZJ-W)
Wall Mount



DS-1212ZJ-S (prev. DS-1225ZJ)
Wall Mount