




DS-2CC192N-A Box Camera

- 1/3" SONY CCD
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control, and backlight compensation
- Flickerless mode
- Auto iris with DC/video driver
- CS mount lens (provide adapter for C mount lens)

Indoor

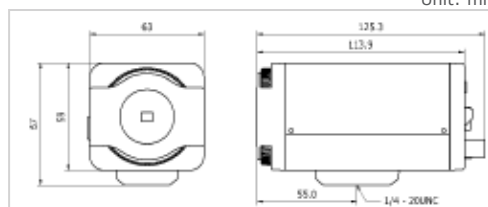

Unit: mm

Specifications

Camera	Image Sensor	DS-2CC192N-A
	Signal System	1/3" SONY CCD
	Effective Pixels	NTSC: 768 (H) × 494 (V)
	Min. Illumination	NTSC: 0.1 Lux @ (F1.2, AGC ON)
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens Mount	C/CS mount
	Auto Iris	DC/Video drive
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1Vp-p composite output(75 Ω/BNC)
	S/N Ratio	More than 48 dB
	BLC	On/Off
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140° F) Humidity 90% or less (non-condensing)
	Power Supply	12 V DC ± 10%/24 V AC ± 10%
	Power Consumption	Max. 3.5 W
	Dimension (WxHxD)	63 × 67 × 125.3 mm (2.48" × 2.64" × 4.93")
	Weight	550 g (1.21 lbs)

Accessories

DS-1212ZJ (prev. DS-1212ZJ-W)
Wall MountDS-1212ZJ-S (prev. DS-1225ZJ)
Wall Mount