




Outdoor

DS-2CC572N-IMB Vandal Proof IR Dome Camera

- Compact structure design
- 1/3" SONY HAD CCD
- Day / Night auto switch
- Low illumination: 0.1Lux @ F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Weather Proof: IP66 standard

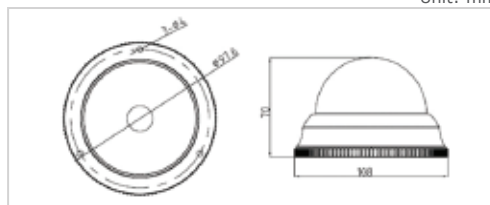

Specifications

		DS-2CC572N-IMB
Camera	Image Sensor	1/3" SONY HAD CCD
	Signal System	NTSC
	Effective Pixels	NTSC: 768 (H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens	3.6 mm
	Angle of view	78°
	Lens Mount	M12
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 65°;
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1Vp-p composite output (75 Ω/BNC)
General	S/N Ratio	More than 48 dB
	BLC	On
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Impact Protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, up to IK10.
	Weather Proof Rating	IP66
	IR Range	Approx 10 to 20 meters
	Power Supply	12 V DC ± 10%
	Power Consumption	Max. 3 W
	Dimension (Dia.xH)	Φ 108 × 70 mm (Φ 4.25" × 2.76")
	Weight	450 g (0.99 lbs)