




DS-2CC591N-A Vari-Focal Dome Camera

- Compact design
- 1/3" SONY HAD CCD
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control, and backlight compensation

Indoor



Unit: mm

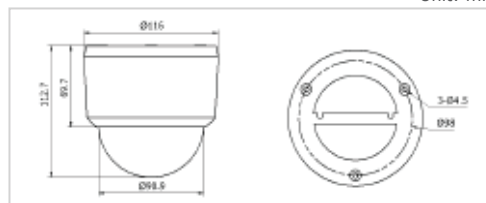

Specifications

		DS-2CC591N-A
Camera	Image Sensor	1/3" SONY HAD CCD
	Signal System	NTSC
	Effective Pixels	NTSC: 768 (H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens	2.8 - 11 mm @ F 1.2
	Lens Mount	Φ14
	Auto Iris	DC Drive
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 80°; Rotation: 0 - 140°;
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1Vp-p composite output (75 Ω/BNC)
General	S/N Ratio	More than 48 dB
	BLC	On/Off
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	24 V AC ± 10%, 12 V DC ± 10%
	Power Consumption	Max. 3.5 W
	Dimension (Dia.xH)	Φ 122.8 × 109.1 mm (Φ 4.83" × 4.30")
	Weight	400 g (0.88 lbs)