




DS-2CC592N-IR IR Dome Camera

- Compact design
- 1/3" SONY Super HAD CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 LUX with IR)
- Day/night auto switch
- Weather Proof: IP66 standard

Outdoor



Unit: mm

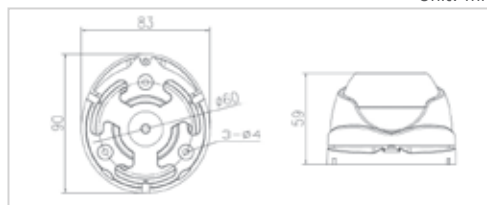

Specifications

Camera	Image Sensor	DS-2CC592N-IR 1/3" SONY Super HAD CCD
	Signal System	NTSC
	Effective Pixels	768 (H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens	3.6 mm Angle of view: 78°
	Lens Mount	M12
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 75°;
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1 Vp-p composite output (75 Ω/BNC)
	S/N Ratio	More than 48 dB
	BLC	On
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	12 DC ± 10%
	Power Consumption	Max. 3 W
	Weather Proof Rating	IP66
	IR Range	Approx 10 to 20 meters
	Dimension (Dia.xH)	89.6 × 59.1 mm (3.53" × 2.33") Weight 400 g (0.88 lbs)