





DS-2CD892N-IR1(IR3) IR Bullet Network Camera

- High performance SONY CCD
- Linux OS embedded
- TI DaVinci hardware compression
- H.264 dual stream real time video compression in 4CIF/DCIF/2CIF/CIF/QCIF
- Support variable Bit Rate and Frame Rate
- Support IE and client software for network preview
- IP66

Outdoor

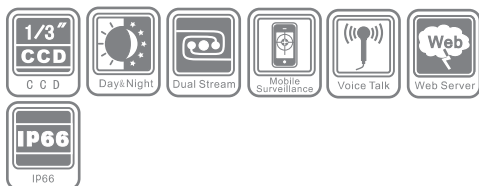

Unit: mm

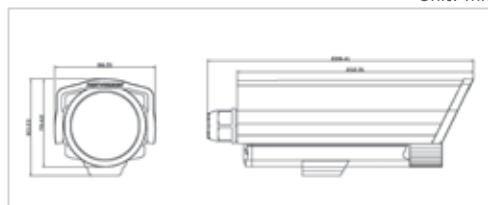

Specifications

		DS-2CD892N-IR1	DS-2CD892N-IR3
Camera	Image Sensor	1/3" SONY Super HAD CCD	
	Min. Illumination	0.1Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2Lux @ (F1.8, AGC ON), 0 Lux with IR	
	Shutter Time	1/50 (1/60) s to 1/100,000 s	
	Lens	3.6 mm	
	Lens Mount	M12	
	Day & Night	Electronic	
Compression Standard	Horizontal Resolution	540 TVL	540 TVL
	Video Compression	H.264	
	Bit Rate	32 Kbps - 8 Mbps	
	Audio Compression	OggVorbis	
Image	Dual Stream	Yes	
	Max. Image Resolution	704 × 480	
	Frame Rate	60 Hz: 30 fps (704 × 480)	
	Image Settings	Saturation, Brightness, Contrast adjustable through client software or web browser	
Network	Alarm Trigger	Motion detection	
	Protocols	TCP/IP, HTTP, DHCP, DNS, RTP/RTCP, PPPoE	
	Security	Password protection	
Interface	Audio Input	1-ch, 3.5 mm audio interface (2.0 - 2.4 Vp-p, 1 kΩ)	
	Audio Output	1-ch, 3.5 mm audio interface (Line level, 600 Ω)	
	Communication Interface	1 RJ45 10 M/100 M Ethernet port and 1 RS-485 interface	
	Alarm Input	1	
	Alarm Output	1	
General	Video Output	1Vp-p composite output (75 Ω/BNC)	
	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)	
	Power Supply	12 V DC ± 10%	
	Power Consumption	IR1: Max. 5.5 W IR3: Max. 7 W	
	Weather Proof Rating	IP66	
	IR Range	IR1 series: within 20 meters(66 feet), IR3 series: within 40 meters(131 feet)	
	Dimension (WxHxD)	86.5 × 83.1 × 228.4 mm (3.41" × 3.27" × 8.99")	
	Weight	1400 g (3.09 lbs)	

Accessories



DS-1212ZJ (prev. DS-1212ZJ-W)
Wall Mount



DS-1212ZJ-S (prev. DS-1225ZJ)
Wall Mount