


DS-9508/9516NI-S Embedded NVR



Key Features

- H.264/MPEG4 Video Stream Input
- Third Party Network Camera Support
- Up to 5MP(2560x1920) Recording Resolution
- Up to 8 SATA HDD
- Easy HDD Replacement
- One Button Archive

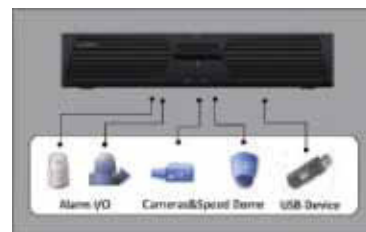

Specifications

		DS-9508NI-S	DS-9516NI-S
Video/Audio Input	IP Video Input	8-ch 4CIF/4-ch 720P@30fps/4-ch 2.0MP@15fps/ 2-ch 2.0MP@30fps/2-ch 5.0MP@8fps	16-ch 4CIF/8-ch 720P@30fps/8-ch 2.0MP@15fps/ 4-ch 2.0MP@30fps/4-ch 5.0MP@8fps
	SATA Interface	8	8
Hard Disk Drive	Type	SATA interface	
	Capacity	Each supports up to 2TB capacity	
External Interface	Network Interface	1 RJ-45, 10/100/1000Mbps self-adaptive Ethernet interface	
	USB Interface	2, USB2.0	
	Serial Interface	1 RS485 Serial Interface, 1 RS232 Serial Interface	
	Alarm in	16	
General	Alarm out	4	
	Chassis	19" standard 2U chassis	19" standard 2U chassis
	Power Supply	100 ~ 240 V AC, 6.3 A, 50 ~ 60 Hz	
	Consumption	≤20 W (without HDD)	
	Working Temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)	
	Working Humidity	10% ~ 90%	
	Dimension (WxHxD)	450 x 95 x 450 mm (17.71" x 3.74" x 17.71")	
	Weight (without HDD)	≤ 8000 g (17.64 lbs)	