


DS-9608/9616NI-SH Embedded NVR



Key Features

- High performance DSP hardware decompression
- Support video & audio from network camera, network speed dome and video server
- Up to 1080P recording resolution
- HDMI Output at 1920x1080 resolution
- Easy back-up to USB and CD/DVD-RW (optional)

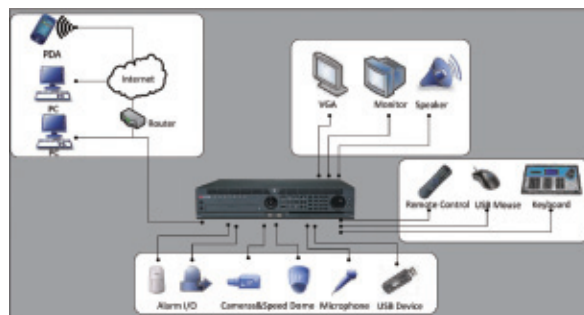

Specifications

		DS-9608NI-SH	DS-9616NI-SH
Video/Audio Input	IP Video Input	8-ch 4CIF/4-ch 720P@30fps/4-ch 2.0MP@15fps/2-ch 2.0MP@30fps	16-ch 4CIF/8-ch 720P@30fps/8-ch 2.0MP@15fps/4-ch 2.0MP@30fps
	Video Output	2-ch, BNC (1.0 Vp-p, 75 Ω)	
Video/Audio Output	Recording Resolution	Up to 1080P	
	HDMI Output	1-ch, resolution: 1920 × 1080/60Hz	
	VGA Output	1-ch, resolution: 1280 × 1024/60Hz	
	Audio Output	2-ch, BNC (Linear Electrical Level, 600Ω)	
Storage	Synchronous Playback	8-ch 4CIF	16-ch 4CIF
	Type	8 SATA interfaces, maximum 4 HDD with DVD burner bracket by default	
	Capacity	Each supports up to 2TB capacity	
External Interface	Voice Talk	2-ch, BNC (2.0 Vp-p, 1kΩ)	
	Network Interface	1, RJ-45 10/100/1000Mbps self-adaptive Ethernet interface	
	USB Interface	3, USB2.0	
	Serial Interface	1 RS485 Serial Interface, 1 RS232 Serial Interface, 1 RS-485 keyboard Serial Interface	
	Alarm In	16	
General	Alarm Out	4	
	Chassis	19" standard 2U chassis	
	Power Supply	100 ~ 240 V AC, 6.3 A, 50 ~ 60 Hz	
	Consumption	≤70 W (without HDD)	
	Working Temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)	
	Working Humidity	10% ~ 90%	
	Dimension (WxHxD)	450 x 95 x 450 mm (17.71" x 3.74" x 17.71")	
	Weight (without HDD)	≤ 8000 g (17.64 lbs)	