



R2416300UL, R2416300ULCB UL Listed Rack Mount CCTV Power Supply

Rev. DSR2416300UL - A26F

Overview



- These Altronix AC Rack Mount CCTV Power Supplies provide 24VAC or 28VAC distributed via sixteen (16) fuse or Class 2 Rated PTC protected power limited outputs for powering CCTV Cameras, heaters and other video accessories.

R2416300UL

- Sixteen (16) fuse protected outputs.
- Outputs are rated @ 3.5 amp.

R2416300ULCB

- Sixteen (16) Class 2 Rated PTC protected power limited outputs.
- Outputs are rated @ 2.5 amp.

Specifications

- Input 115VAC, 50/60Hz, 3 amp.
- 24VAC @ 12.5 amp (300VA) or 28VAC @ 10 amp (280VA) supply current.
- Surge suppression.
- Illuminated power disconnect circuit breaker with manual reset.
- Individual power LEDs.
- Removable terminal blocks w/locking screw flanges.
- 3-wire grounded line cord.
- Spare fuse(s) provided (fuse protected model only).
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.
- 2U rack mount chassis for use in standard EIA 19" rack.
- Product weight:
 - R2416300UL: 15.8 lbs.
 - R2416300ULCB: 15.8 lbs.
- Shipping weight:
 - R2416300UL: 16.8 lbs.
 - R2416300ULCB: 16.8 lbs.

Agency Approvals



UL Listed for Commercial CCTV Equipment (UL 2044).






CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.

Enclosure Dimensions

3.25"H x 19.125"W x 8.5"D

View from back

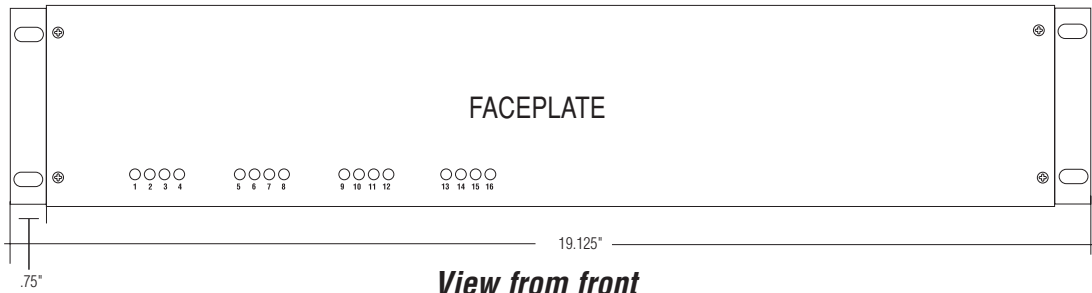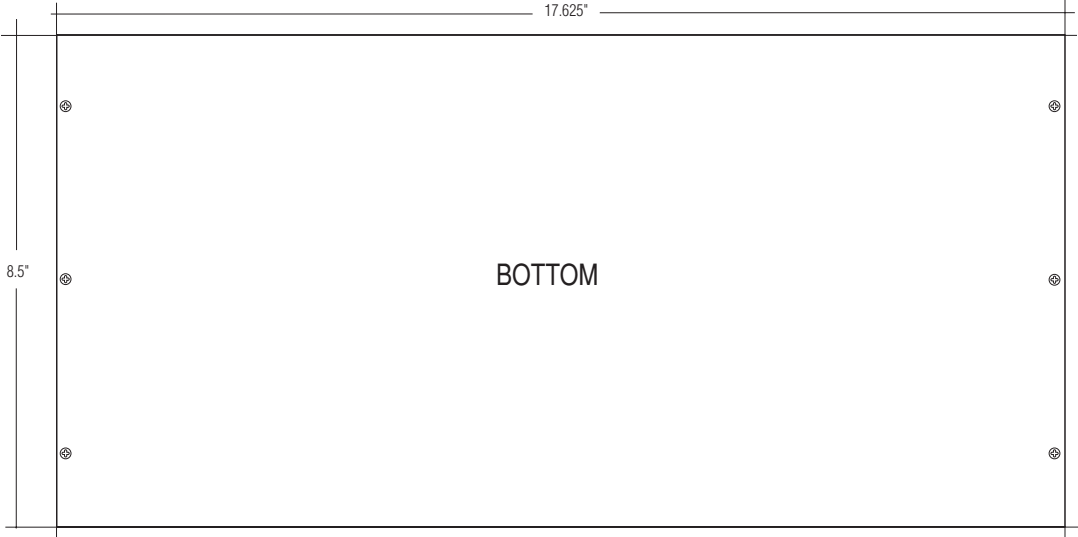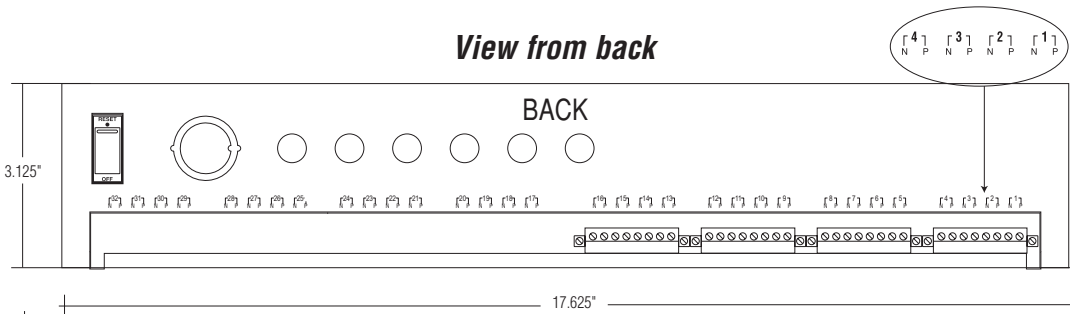

View from front