

EIR50

Compact, Standalone IR Illuminator




Features

- Up to 50 meters / 164 ft. IR range
- Compact size for discreet surveillance
- Standalone design for flexible application
- Up to 20,000 hours of LED lifespan
- Improve image quality in complete darkness and/or in low-light conditions
- Built-in sensor will automatically turn on illuminator at night and off during the daytime
- Weatherproof design and IP66 rated
- 2-axis rotation for easy angle adjustment

Specifications

IR Distance	50M / 164 ft.
IR Wavelength	850nm
IR LED Lifespan	Up to 20,000 hours
Power Source	12VDC
Power Consumption	6W max.
Dimensions (D x H)	80 x 80 mm / 3.15" x 3.15" (w/out bracket) 80 x 148 mm / 3.5" x 5.83" (with bracket)
Weight	0.33 kg / 0.73 lbs
Operating Temp.	0°C ~ 50°C 32°F ~ 122°F (20%~80% humidity)
Weatherproof	IP66 rated

Dimensions

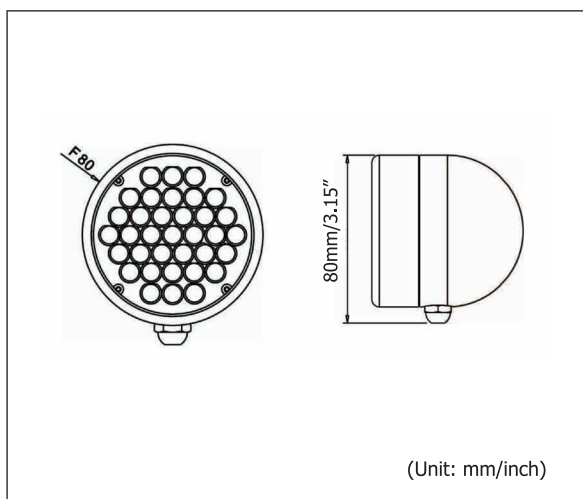

EIR100

IR Illuminator



Features

- Up to 70 meters / 230 ft. IR range
- Up to 20,000 hours of LED lifespan
- Improve image quality in complete darkness and/or in low-light conditions
- Built-in sensor will automatically turn on illuminator at night and off during the daytime
- Weatherproof design and IP66 rated
- 2-axis rotation for easy angle adjustment
- Designed to enhance low light performance for EZ550 only

Specifications

IR Distance	70M / 230 ft.
IR Wavelength	850nm
IR LED Lifespan	Up to 20,000 hours
Power Source	12VDC
Power Consumption	12W max.
Dimensions (L x W x H)	200 x 290 x 100 mm / 7.87" x 11.41" x 3.92"
Weight	0.76 kg / 1.67 lbs
Operating Temp.	0°C~50°C / 32°F~122°F (20%~80% humidity)
Weatherproof	IP66 rated

Dimensions

