

EPTZ500


Indoor Recessed PTZ Camera



Features

- 1/4" Sony Interline Transfer Super HAD CCD with 460 TVL of horizontal resolution
- Auto Pan/Tilt/Zoom function
- 192 preset positions available
- 16 cruise tours can be set (each tour contains up to 16 positions)
- Up to 256 speed domes can be supported on the RS-485 bus
- Auto iris adjusts the monitoring image to the best brightness
- Integrated privacy zone masking feature
- Supports EverFocus, Pelco-D, Pelco-P & Samsung protocols
- Suitable for any indoor application

Dimensions

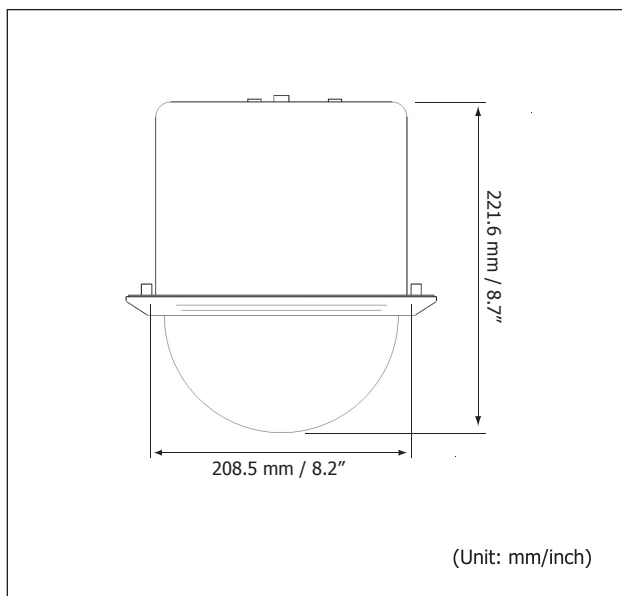

Specifications

Image Device	1/4" Sony Interline Transfer Super HAD CCD
Zoom Ratio	18x Optical, 12x Digital
Lens	f=4.1mm (Wide) ~ 73.8mm (tele)
Horizontal Resolution	460 TVL
Video Format	510 x 492 (NTSC) / 500 x 582 (PAL)
Video Output	BNC 1.0Vp-p, 75ohm
S/N Ratio	Over 50dB
Iris	Auto/Manual
Focus	Auto/Manual
Backlight Comp.	OSD Setting
Auto Gain Control	OSD Setting
Auto White Balance	Yes
Gamma Correction	0.45
Sync. Mode	Internal/Line Lock
Sensitivity	1.0 Lux/F=1.4
Dwell Time at Preset	1~60 seconds
Cruise Tour	16 groups (16 preset positions per group)
Built-in Protocols	EverFocus, Pelco-D, Pelco-P, Samsung
Auto Flip	180° rotation
Auto Zoom Speed	Adjusted automatically based on zoom change
Auto Pan	2 points scanning (can be set freely)
Auto Pan Speed	1~239 grade available
Tilt Range	89.5°
Position Accuracy	+/- 0.1°
Alarm	4 In, 1 Out with tour/position (auto triggering)
Communication	Standard RS-485 interface
Communication Speed	1200/2400/4800/9600 bps
Operating Temp.	0°C ~ 50°C / 32°F ~ 122°F
Power Supply	24VAC
Power Consumption	18W
Dimensions (W x H x D)	208.5 x 221.6 x 208.5 mm / 8.2" x 8.7" x 8.2"
Weight	3.2 kg / 7.05 lbs

Ordering Information

- **EPTZ500:** 1/4" Indoor Recessed PTZ, 18x Zoom, 460 TVL, no heater