

IR LED Day/Night Bullet Cameras

420 TV lines

EV-1026-N2SQ 2.9mm, 12 IR LEDs

EV-1026-N3SQ 3.6mm, 24 IR LEDs

EV-1026-N6SQ 6.0mm, 24 IR LEDs

540 TV lines

EV-1606-N2SQ 2.9mm, 12 IR LEDs

EV-1606-N3SQ 3.6mm, 24 IR LEDs


EV-1606-N6SQ 6.0mm, 24 IR LEDs



Features:

- ▶ 1/3" SONY Super HAD II CCD
- ▶ IR LEDs for nighttime use
- ▶ 0-lux with LEDs on
- ▶ 12VDC operation
- ▶ IP 66 Weatherproof
- ▶ Split-glass technology to eliminate IR reflection
- ▶ Available with 420 or 540 TV lines

Dimensions:

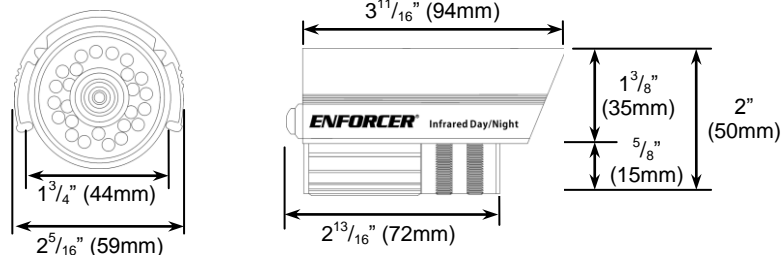

1/3" SONY Super
HAD II CCD



Available with 420
or 540 TV lines



IR LEDs



Split-glass
technology

SECO-LARM
16842 Millikan Avenue
Irvine, CA 92606

Tel: 1-949-261-2999
1-800-662-0800
Fax: 1-949-261-7326

Web: www.seco-larm.com
Email: info@seco-larm.com

CE **RoHS**
Copyright © 2011
SECO-LARM U.S.A., Inc.
All rights reserved

IR LED Day/Night Bullet Cameras











Specifications:

	1026-N2SQ	1026-N3SQ	1026-N6SQ	1606-N2SQ	1606-N3SQ	1606-N6SQ
Lens size	2.9mm	3.6mm	6.0mm	2.9mm	3.6mm	6.0mm
Viewing angle	120°	92°	53°	120°	92°	53°
Type	IR bullet camera					
CCD	1/3" Sony Super HAD II					
Resolution	420 TV lines			540 TV lines		
Pickup elements	510x492 pixels			768x494 pixels		
Sync	Internal					
Video output	1.0Vp-p composite video, 75Ω					
Video output format	NTSC*					
Minimum illumination	0.05-lux (with LEDs off)			0.02-lux (with LEDs off)		
	0-lux (with LEDs on)			0-lux (with LEDs on)		
Gamma correction	0.45					
S/N ratio	>48dB					
Shutter control	Auto Electric Shutter (AES)					
Gain control	Auto					
IP rating	IP66					
# of infrared LEDs	12 (850nm)	24 (850nm)	24 (850nm)	12 (850nm)	24 (850nm)	24 (850nm)
LED range	Up to 40ft (12m)	Up to 50ft (15m)	Up to 50ft (15m)	Up to 40ft (12m)	Up to 50ft (15m)	Up to 50ft (15m)
Operating voltage	12VDC ±10%					
Current draw	LEDs OFF	75mA			95mA	
	LEDs ON	150mA	250mA	250mA	170mA	270mA
Operating temperature	-4°~122° F (-20°~50° C)					
Dimensions	3 ¹¹ / ₁₆ "x2 ⁵ / ₁₆ "x2" (94x59x50 mm) with sunshield					
Weight	10-oz (280g)					

*PAL versions also available. Please contact SECO-LARM.

Also Available from SECO-LARM:

EVT-PB1Q  Passive Video Balun	PS-D1610-BUQ  10-Amp DC Power Supply	EVP-1SD6BHULQ  Blade Fused DC Power Supply	VC-1BAQ  BNC to VGA Converter with VESA Mount
EVT-AB1Q  Active Video Balun	DR-1 Series  H.264 Network DVRs	ST-LA110-TTQ  Voltage Converter	VA-1102B-WQ  Video Distributor 1-In, 2-Out

SECO-LARM
 16842 Millikan Avenue
 Irvine, CA 92606

Tel: 1-949-261-2999
 1-800-662-0800
 Fax: 1-949-261-7326

Web: www.seco-larm.com
 Email: info@seco-larm.com


 Copyright © 2011
 SECO-LARM U.S.A., Inc.
 All rights reserved