


3000 Series



Standalone

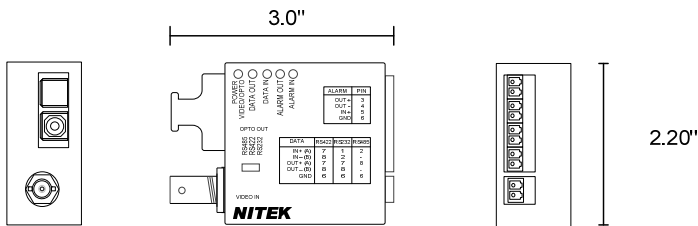

Description

Nitek's **FTS312104S00** is a single fiber channel Universal-Mode™ video and data transmitter in which both video and data are transmitted over the same fiber. Nitek's unique Universal-Mode™ optics allow the same unit to be used with single-mode or multi-mode fiber optic cabling types.

The **3000 Series** fiber optic transmission systems are designed to provide point-to-point, broadcast quality video transmission at an affordable cost, without compromise. The video is transmitted in a real time full bandwidth digital format. This insures the highest quality regardless of distance. By transmitting the video in an uncompressed format, there is no latency or loss of video quality.

An Automatic Gain control feature built into the **3000 Series** receivers makes this a "plug-and-play" video system, requiring no field setup or adjustments. Receivers are equipped with LED indicators which provide an at-a-glance operating and optics state.

The **3000 Series** 10 bit digital technology combined with ease of installation and inherent reliability have made this the system of choice for many critical applications.

Features

- Real time 10 Bit digital video eliminates signal degradation associated with distance.
- Switchable P/T/Z data interface allows interfacing with a wide range of manufacturers' protocols.
- Universal-Mode™ allows the same unit to be used with multi-mode or single-mode fiber without any set up or field configuration.
- Wide dynamic range. Provides "broadcast quality" video transmission.
- Directly supports all NTSC, PAL or SECAM video formats.
- Compatible 3000 Series Receivers are equipped with front panel LED status indicators to provide at-a-glance diagnostics of the systems video and optics state.
- Broad operating temperature range for use in protected outdoor applications.

Ordering Information

Fiber Type	Part #	Compatible Receiver	# Fibers	Loss Budget	Connector	Max Distance
Multi-Mode 62.5/125µm	FTS312104S00	FRS312104S00	1	20dB	SC-PC	Multi-Mode Fiber 6,500 ft (1.2 miles)
Single Mode 9/125 µm		FRS312104R00				Single-Mode Fiber >130,000 ft (24.5 miles)
Description	FTS312104S00 Video Transmitter					
Accessories						

NITEK®



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

FTS312104S00

Video and Data Transmitter

FTS312104S00-031109

TECHNICAL SPECIFICATION

Video

Compression	None, Uncompressed
Input / Output Level	1V p/p nominal
Input / Output Impedance	75 Ohm Unbalanced
Frequency Response	10Hz to 5.75Mhz
Differential Gain	1%
Differential Phase	1°
Signal to Noise Ratio	67dB minimum
Fiber Connector	SC-PC
Video Connection	BNC
Video Standard	NTSC/PAL

Data

Data interface	RS232, RS422 (full duplex, two wire) RS485 (half duplex, two wire) Slide switch selectable
Data rate per channel	Up to 512kb/s

Auxiliary Communication

Bi-directional contact closure/alarms	
Alarm in	Contact/relay in
Alarm out	100V / 150mA max.

Audio

Not Available in 3000 Series	See 5000 Series
------------------------------	-----------------

Optical

Accepts both multi- and single-mode fiber	
Multi-mode	50/125 or 62.5/125
Single-mode	9/125
Wavelength	1310nm
Optical Connector	SC-PC
Path Loss	20dB min.

General


Operating Temperature	-40° to 165° Fahrenheit
Operating Humidity	0 to 95% non-condensing
Power Requirements	+12VDC to +24VDC ac/dc 1.5 Watts

Mechanical

Height	2.165"
Width	2.165"
Depth	1.023"

In our continued effort to "Bridge the Gap in Technology", product specifications are subject to change without notice.

System Design

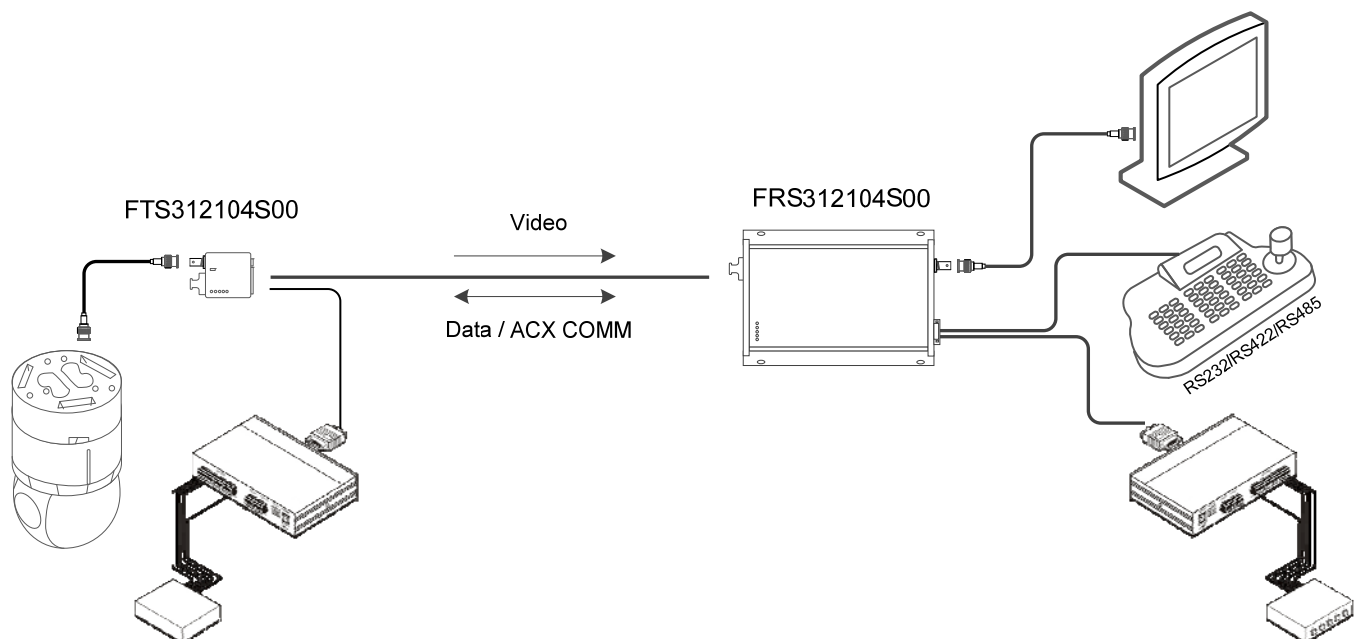

NITEK®



USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET