



For Security
Vari-Focal

DV5×3.6R4B-2

Applicable camera (model)

1	2/3	1/2	1/3	1/4
---	-----	-----	-----	-----

VARI
Vari-Focal

WIDE
Wide Angle

TELE
Telephoto
Long Focal

**Day~
Night**
Day & Night

MANUAL
Manual Iris

CS-mt
CS Mount


METAL
Metal Mount

AT
Aspherical Lens

5×



- Advanced design engineering and special optic glass adopted, best suited for color, monochrome and day and night cameras
- Compatible with a wide range - 1/2", 1/3" and 1/4" - cameras
- Wide range of f3.6-18mm, supporting various applications
- High accuracy aspheric lens adopted, achieving the high quality image

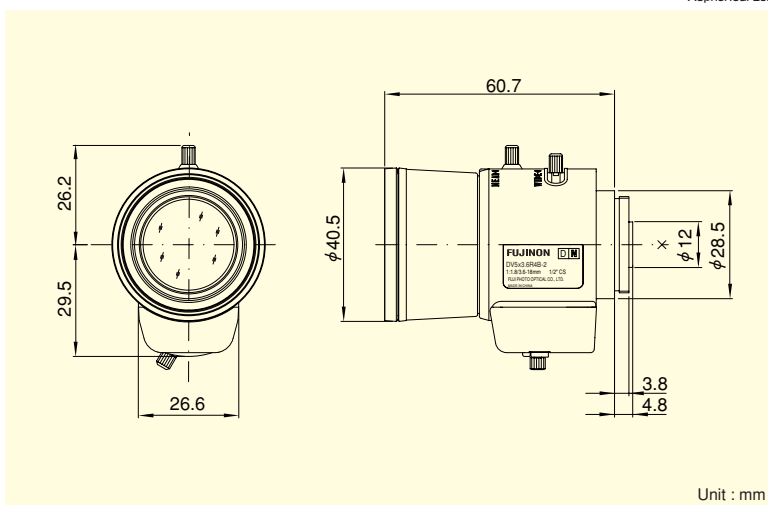

VARI-FOCAL LENSES

Focal Length (mm)			3.6~18 (5×)
Iris Range			F1.8 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/2"	WIDE	95°54′ × 72°24′
		TELE	19°57′ × 15°09′
	1/3"	WIDE	72°24′ × 54°25′
		TELE	15°09′ × 11°38′
	1/4"	WIDE	54°25′ × 40°50′
		TELE	11°38′ × 8°37′
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/2"	WIDE	694 × 457
		TELE	110 × 83
	1/3"	WIDE	457 × 321
		TELE	83 × 62
	1/4"	WIDE	321 × 232
		TELE	62 × 47
Back Focal Distance (in air) (mm)			7.87
Exit Pupil Position (From Image Plane) (mm)			-81
Filter Thread (mm)			—
Mount			CS
Mass (g)			65
Remarks			•Metal Mount