

MAIN FEATURES

Indoor/Outdoor installations

Hinged, removable body

PMMA window

Weatherproof Standard IP66/IP67

Double mounting option: regular or feed-through brackets

Very good vandal-resistant protection

DESCRIPTION

Constructed from extruded aluminium and technopolymer. Sturdy construction at a light weight, HEK offers very good vandal-resistant protection.

The opening system allows easy access for installation and servicing.

Different mounting options available: fixed (feed-through or standard) wall or ceiling mounts or P&T.

The weatherproof feature is ensured by EPDM-rubber gaskets and by 3 M16 cable glands or by the sealing rings.

A wide range of accessories is available: sunshield, heater and fan-assisted heater, blower and camera power supply. Further, it is also possible to install a blower including an air filter replacing one cable gland (not suitable in case of using the bracket with internal cable channel).

The accessories are supplied factory installed or as simple upgrade kit.



HEK30K




HEK30D (WITHOUT SUNSHIELD)



HEK30K + WB0VA2



HEK30K + WBMA

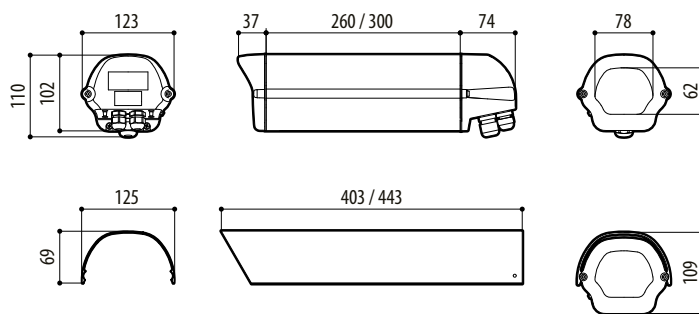

AVAILABLE MODELS					
Code	Sunshield	Heater 115/230Vac	Heater 12Vdc/24Vac	Fan assisted heater 24Vac	Max consumption
HEK26D0Y000B					
HEK26K0Y000B	•				
HEK26K1Y000B	•	•			40W
HEK26K2Y000B	•		•		20W
HEK30D0Y000B					
HEK30K0Y000B	•				
HEK30K1Y000B	•	•			40W
HEK30K2Y000B	•		•		20W
HEK30K2Y015B	•			•	24W

TECHNICAL DATA

GENERAL

Resistant technopolymer front and back cover, RAL7030

Extruded aluminium body and external slide

Epoxypolyester powder painting, RAL9002 colour

Stainless steel external screws

Supplied with instruction manual, desiccant bag, accessories for camera and lens mounting

MECHANICAL

3xM16 cable glands

PMMA window (WxH): Ø 72mm (2.8in)

Internal usable area (WxH): 82x62mm (3.2x2.4in)

Internal usable length without accessories

HEK26 260mm (10.2in)

HEK30 300mm (11.8in)

Internal usable length with heater and/or power supply

HEK26 190mm (7.5in)

HEK30 235mm (9.3in)

Internal usable length with heater and/or blower

HEK26 190mm (7.5in)

HEK30 235mm (9.3in)

ELECTRICAL

Heater Ton 15°C±3°C (59°F±5°F) Toff 22°C±3°C (71°F±5°F)

- IN 12Vdc/24Vac, consumption 20W max
- IN 115/230Vac, consumption 40W max

Blower with thermostat air filter, Ton 35°C±3°C (95°F±5°F) Toff 20°C±3°C (71°F±5°F) and back cover

- IN 12Vdc, consumption 4W max
- IN 24Vac, consumption 4W max

Not compatible with bracket with internal cable channel.

Camera power supply

- IN 100-240Vac - OUT 12Vdc, 50/60 Hz, 1A
- IN 230Vac - OUT 24Vac, 50/60Hz, 400mA

ENVIRONMENT

Indoor / Outdoor

Operating temperature with heater: -20°C / +60°C (-4°F / +140°F)

CERTIFICATIONS

CE EN61000-6-3, EN60065, EN50130-4

IP66/IP67 EN60529 with cable glands

IP66/IP67 EN60529 with special gaskets and bracket with internal cable channel

IP55 EN60529 with bracket with internal cable channel

ACCESSORIES

OHEKS26A000 Sunshield for HEK26

OHEKS30A000 Sunshield for HEK30

OHEH02B Heater 115/230Vac

OHEH01B Heater 12Vdc/24Vac

OHEKVF1EB Blower with thermostat and air filter 12Vdc

OHEKVF2EB Blower with thermostat and air filter 24Vac

OHEPS10B Camera power supply IN 100-240Vac - OUT 12Vdc, 1A

OHEPS11B Camera power supply IN 230Vac - OUT 24Vac, 400mA

OWBIP2 Kit special gaskets (3xM16) to allow protection IP66/IP67 for WBOVA2 and WCM4A2 brackets

OHEGGB Weatherproof junction box IP55

BRACKETS AND ADAPTORS

WBMA Wall bracket with ball joint

WBOVA2 Wall bracket with internal cable channel

WBOV3A2 Wall bracket with internal cable channel, support plate and integrated junction box

WCM3A Ceiling bracket with ball joint

WCM5A Ceiling bracket with ball joint

WCM4A2 Ceiling bracket with internal cable channel

WFWCA Column mount with ball joint

RELATED PRODUCTS

PTH300 Pan&Tilt series

PTH900 Pan&Tilt series

SPARE PARTS

D0THE02 Spacers for camera and lens

OHEKMAN Cable glands, gaskets and screws kit

OHEKFA06 Front cover RAL7030 with screws and gaskets

OHEKFP06 Back cover RAL7030 with cable glands screws and gaskets

PACKAGE						
Code	Unit weight		Package weight		Package dimensions (WxHxL)	
	kg	lb	kg	lb	cm	in
HEK26K1	2.0	4.4	2.3	5.0	14.0x15.0x46.0	5.5x5.9x18.1
HEK30K1	2.2	4.8	2.4	5.3	14.0x15.0x46.0	5.5x5.9x18.1