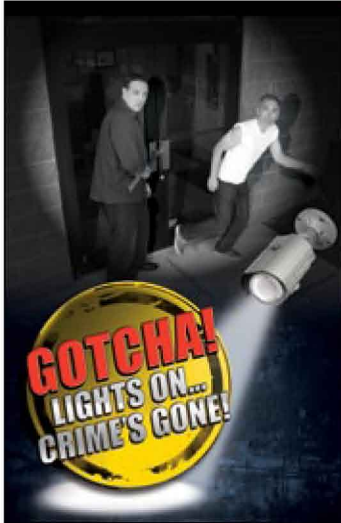


Glacier™ Series Bullet Cameras with PIR Sensor & White LEDs

DUAL VOLTAGE**OUTDOOR****DIGITAL DETERRENT™**

HT5100BPVFG
HT5100BPVFGW
HT5200BPVFG
HT5200BPVFGW

2.8-12mm auto iris varifocal lens, grey housing
2.8-12mm auto iris varifocal lens, white housing
5-50mm auto iris varifocal lens, grey housing
5-50mm auto iris varifocal lens, white housing

**Features**

- When motion is detected by the PIR sensor the white LEDs automatically turn on and illuminate the area
- 600 TV lines
- DC auto iris varifocal
- True day / night capability
- Dual voltage 12VDC & 24VAC operation
- 24pcs 850nm IR LEDs / 6pcs white LEDs
- External controls for zoom & focus
- Full OSD operation
- Automatic thermostatic sensor
- Weather resistant operation
- Alarm output for motion detection
- EZ mount system simplifies installation
- 5 year warranty


**Specifications**

Image Sensor 1/3" Sony Super-HAD II™ CCD
Resolution 600 TV lines
Minimum Illumination 0.00001 lux
0.00006 lux (IR on)
Total Pixels 811 (H) x 508 (V)
Effective Pixels 768 (H) x 494 (V)
TV System NTSC
Scanning Frequency 15.734kHz (H) & 59.94Hz (V)
Scanning System 2:1 interlace
Synchronization Internal
S/N Ratio More than 52dB
Video Output CVBS: 1.0Vp-p / 75 Ohm
Electronic Shutter Speed 1/60 sec. - 1/120,000 sec
SSDR On / Off (level adjustable)
Backlight compensation BLC / HLC / Off
Day & Night Color / BW / Auto
Gain Control High / Low / Off
White Balance ATW / Outdoor / Indoor /
Manual / AWC
Sense-up Auto / Off (selectable x2 - x512)
Motion Detection On / Off (8 programmable zones)
Privacy Masking On / Off (12 programmable zones)
3 DNR
(Digital Noise Reduction) On / Off (level adjustable)
Digital Zoom On / Off (1x - 16x)
DIS On / Off

Sharpness On / Off (level adjustable)
Flip / Mirror On / Off
Power Consumption DC Heater on: 1.1A
Heater off: 450mA
Power Consumption AC Heater on: 500mA
Heater off: 250mA
Power Supply 12VDC / 24VAC (dual voltage)
(power supply not included)
IR Distance HT5100BPVFG:
Indoor 131' / Outdoor 82'
HT5200BPVFG:
Indoor 164' / Outdoor 98'
Operating Temperature/
Humidity 14° F - 122° F / RH 95% max.
-40° F with Glacier heaters
Storage Temperature/
Humidity -4° F - 140° F / RH 95% max.
Dimensions 3.54" (W) x 4" (H) x 11.22" (D)
Weight 3.08 lbs.

Optional Accessories

PSW4 or PSDC24
24VAC or 12VDC
Power Supply

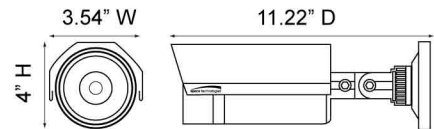

CVCJBB
Bullet Camera
Junction Box



INTJBS
Square
Junction Box



INTCM
Corner/Pole
Adaptor