

speco technologies®

Intensifier™ 2 Series Weatherproof/Tamperproof Dome Camera with Chameleon™ Cover & **Focus Free Lens*** Also Available with **Advanced Leveling Feature**


HT7248FFi

HT7248FFiL (With Advanced Leveling Feature)

Intensifier™ 2 Series	See in the dark without IR LEDs
Featuring HLC	For enhanced backlight operation
Digital Image Stabilization	Maintains a steady picture during vibration or high winds
Advanced Noise Reduction Circuitry	For clear pictures under low light conditions
LEVELING FEATURE (Accelerometer - HT7248FFiL model only)	Alerts installer when camera is horizontally level
Relay Outputs	Triggered by built-in video motion detection
2.8 to 10mm FOCUS FREE LENS	Reduces installation time and service calls
AI Motorized Zoom Lens	Controlled by on-board pushbuttons or RS485 remote
580 Lines of Color Resolution	Extreme resolution for extreme detail
Chameleon™ Cover	Snap-on cover can be painted to match any décor
Wall & Ceiling Mount	3-axis adjustment
Weatherproof/Tamperproof	Indoor or outdoor, meets all your surveillance needs
Dual Voltage Operation	12V DC or 24V AC (auto-sensing) with line-lock



***NO MORE RETURN TRIPS
TO RE-FOCUS THE CAMERA!**

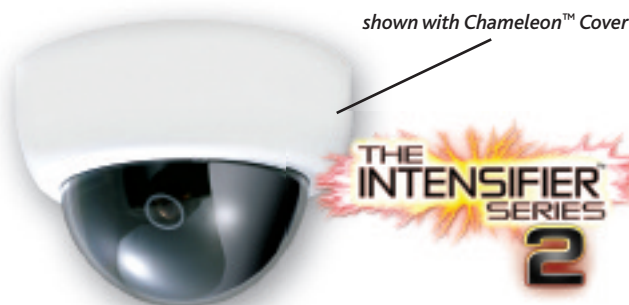

**HT7248FFiL
Leveling Feature**



Specifications

Horizontal Resolution	580 TV lines
Intensifier™	Built-in (selectable from 2x to 256x)
Focus Free Lens	DC auto iris motorized zoom lens 2.8-10mm
Image Device	SONY HQ-1™ with a customized DSP behind it
Min. Object Illumination	0.002 lux (Intensifier™) 0.03 lux (shutter)
Effective Picture Element	410K
Speco Light Compensation (HLC/SLC/WDR)	OFF, LOW, MIDDLE, HIGH
White Balance	W-ATW / S-ATW / AWC / MANUAL
AGC	AGC-L, AGC-M, AGC-H, OFF selectable
Video S/N Ratio	Greater than 52db
Weatherproof Standard	IP66
Mechanical construction	Aluminum composite/polycarbonate - tamper resistant
Operating Environment	-20°F to 120°F
Video Signal Output	1.0V(p-p) NTSC composite, 75 Ohms / BNC Connector + Video Test Connector
Power Consumption	230mA (DC) / 3.8W (AC)
Power Supply	12V DC & 24V AC (Dual Voltage)
Weight	24 ounces
Scanning System	2:1 interlaced 525 lines / 60 fields / 30 frames
Synchronization	Internal / line lock selectable through OSD
Video Noise Reduction	OFF / LOW / MIDDLE / HIGH
Motion Detection	8 Zones
On Screen Display (OSD)	Built-in
Privacy Function	ON / OFF (8 Programmable Zones)
Dimensions	6.29" W x 3.89" H

Optional Accessories:

7246WMT	Weatherproof wall mount for use with many Speco Dome Cameras
CVCTPEXT	Junction Box used for connections and/or conduit applications

Specifications subject to change

Speco Technologies is constantly developing product improvements. We reserve the right to modify product design and specifications without notice and without incurring any obligation.

For more information contact us at:

Speco Technologies 200 New Highway, Amityville, NY 11701 Web: www.specotech.com
Toll Free: 1-800-645-5516 In Metro NY: 631-957-8700 Fax: 631-957-9142 or 631-957-3880