



## Accessories & Kits

Preassembled Outdoor IP Kits with Power & Ethernet Cables

# iPak Series

iPak Kits include housing and wall bracket with pre-assembled GANZ® camera and **computar**® lens. iPak Kits can be ordered with a variety of cameras and lens combinations. Five feet of prewired outdoor rated power and Ethernet cables are included.

- Pre-assembled kit with 24VAC heater and blower
- Pre-wired power & Ethernet cables included
- Feed-through mounting bracket conceals cables
- Minimal set-up reduces installation time
- Multiple mounting options available
- Optional ceiling bracket available (Model: JB-1)
- IP66 rated aluminum housing suitable for all weather conditions




24 VAC Power Cable & Ethernet Cable with RJ-45 Connector



**CBC (AMERICA) Corp.**

# iPak Series


## Preassembled Outdoor IP Kits with Power & Ethernet Cables

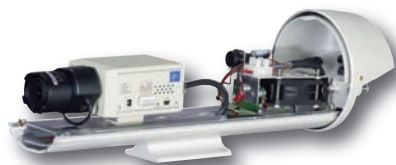

iPak inside view with DDK-1500 Camera & IR Varifocal Lens

### iPak Housing with DDK-1500 Camera (D1 Resolution) & IR Lens

Model #	Lens	Camera Model	Resolution (VxH)	Video Standard
HWB3-281A16	2.8-12mm IR	DDK-1500	720 x 480	MPEG-4/M-JPEG
HWB3-84A16	8.5-40mm IR	DDK-1500	720 x 480	MPEG-4/M-JPEG

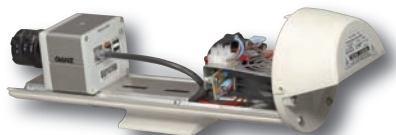

iPak inside view with MPDN Series Camera & 3 Megapixel IR Lens (camera available from 1.3 to 5 megapixels)

### iPak Housing with MP-DN Series Camera & 3 Megapixel IR Lens

Model #	Lens	Camera Model	Megapixel	Type	Resolution (VxH)	Video Standard
HWB3-413MP1D	4.5-13.2mm	MP1DN	1.3	True D/N	1280 x 1024	H.264/MJPEG
HWB3-413MP2D	4.5-13.2mm	MP2DN	2	True D/N	1600 x 1200	H.264/MJPEG
HWB3-413MP3D	4.5-13.2mm	MP3DN	3	True D/N	2048 x 1536	H.264/MJPEG
HWB3-413MP5D	4.5-13.2mm	MP5DN	5	True D/N	2592 x 1944	H.264/MJPEG

## iPak Camera & Lens Options

### iPak Housing with DDK-1500 (D1 Resolution) Camera & IR Lens Options



DDK-1500  
True Day Night  
1/3" CS-MT



TG4Z2813FCS-IR  
2.8-12mm IR  
1/3" CS-MT F1.3



TG5Z8513FCS-IR  
8.5-40mm IR  
1/3" CS-MT F1.3



Additional iPak camera/lens combinations available. Call customer service for a complete list.

### iPak Housing with MP-DN Series Camera & 3 Megapixel Lens



MPDN Series Cameras  
1.3-5 Megapixel True D/N  
1/2" CS-MT



3 Megapixel Lens  
H3Z4518CS-MPIR



- 3 Megapixel Manual Iris Varifocal
- 3x 4.5-13.2mm F1.8
- 1/2" Format, CS Mount
- IR Corrected for True Day/Night Cameras
- Locking set screws on zoom, focus and iris rings
- Precision all glass optics ensure minimal distortion
- Comprehensive 3-year warranty

## Housing Specifications

### iPak Housing (HWB-3)

Model	HWB-3
Heater Power Supply	24 VAC / 350mA
Maximum Camera & Lens Size	9" L x 2.8" W x 2.8" H
Window	0.12" / 3mm thick UV stabilized polycarbonate
Camera Mounting	Removable bracket with two screws
Finish	Off white
Dimensions	4.3" Ø x 16.5 L
Weight	3 lbs / 1.4g
Operating Temperature	-20° F ~ 122° F
Enclosure Protection	Designed to NEMA-3R, IP55

All specifications are subject to change without notice