



6P6C EZ RJ-11 Voice Module, 25 PK

PRODUCT SPECIFICATION

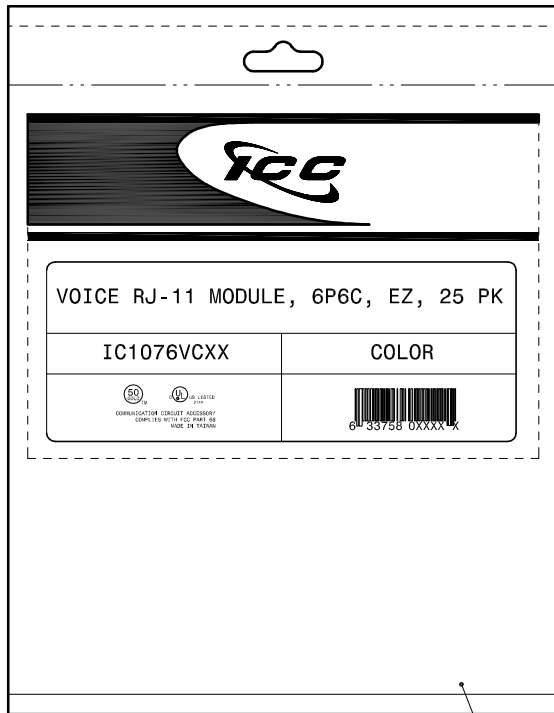

Package includes:

- A. 6P6C EZ RJ-11 Voice Module, 25 pcs
- B. Wire Cap, 25 pcs
- C. Installation Instructions, 1 sheet
- D. Packaging Bag, 1 pc

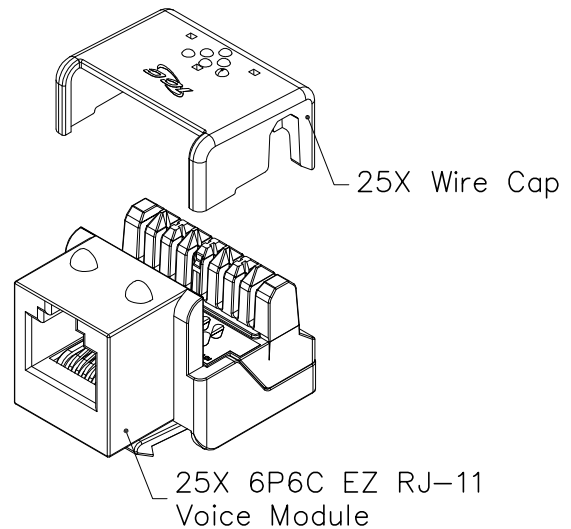

Features and Benefits:

- Designed for all voice connectivity applications.
- Lead frame technology provides maximum performance and uninterrupted signal integrity.
- Engineered to provide 110 IDC termination reducing installation time.
- One piece termination cap allows for a quick and easy termination.
- Includes an integrated USOC/UTP color wiring diagram.
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels.
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes.
- Used with ICC ICLC2, ICLC4, ICLC6 line cords and 110 punch down tool ICACSPDT00.
- Available in almond, black, gray, ivory, and white.
- 25 modules packaged in packaging bag with 25 wire caps packaged in a separated bag and included in packaging bag.
- UL listed.


MODULE, VOICE, RJ-11, EZ, 25 PK

ITEM NO.	IC1076VCXX
DWG NO.	PS1076VC00

REV.	H
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) *14700 Alondra Blvd., La Mirada, CA 90638* www.icc.com

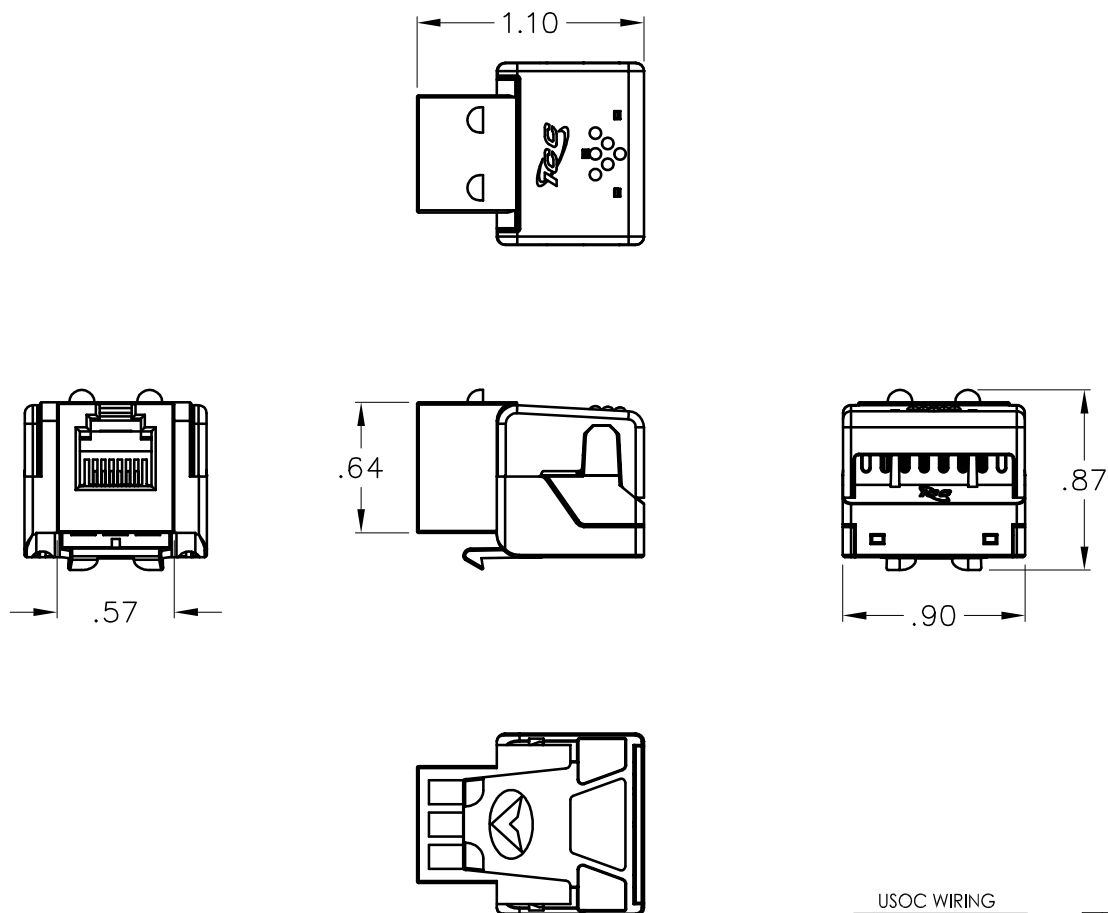

USOC WIRING		UTP WIRING	
6	BLUE	6	GREEN
5	YELLOW	5	ORANGE
4	GREEN	4	WHITE/BLUE
3	RED	3	BLUE
2	BLACK	2	WHITE/ORANGE
1	WHITE	1	WHITE/GREEN

NOTE: UNLESS OTHERWISE SPECIFIED

1. RJ-11 VOICE MODULE:

A. ELECTRICAL:

- CURRENT RATING: 1.5 AMPS MAX
- VOLTAGE RATING: 150 VOLTS ALTERNATING
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS, 60 HZ
- INSULATION RESISTANCE: > 10 MOHMS


B. MECHANICAL:

- MATED FORCE: 5 LBS MAX
- UNMATED FORCE: 5 LBS MAX
- PLUG RETENTION FORCE: 20 LBS MIN
- DURABILITY: 750 CYCLES

C. PHYSICALS:

- HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- CONTACT: PHOSPHOR BRONZE GOLD PLATING OVER 100 INCHES OF NICKEL
- GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
- CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC)
ACCEPTS 22~24 AWG SOLID WIRE

D. COLORS: XX: AL-ALMOND, BK-BLACK, BL-BLUE, GN-GREEN, GY-GRAY, IV-IVORY, OR-ORANGE, PR-PURPLE, RD-RED, WH-WHITE, & YL-YELLOW



NEXT: (NEAR END CROSS TALK)	1 MHz > 65 dB
	10 MHz > 50 dB
	16 MHz > 46 dB
	20 MHz > 44 dB
INSERTION LOSS:	
	10 MHz > 0.008 dB
	16 MHz > 0.02 dB

UL US FILE NO. 125268

MODULE, VOICE, RJ-11, EZ, 25 PK

ITEM NO. IC1076VCXX

REV. H

DWG NO. PS1076VC00

PAGE NO. 2

ICC
Premium Products
Proven Performance
Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) *14700 Alondra Blvd., La Mirada, CA 90638* www.icc.com