

IM740P(-S)

In-wall Mount For 22"-40" Flat Panel Displays

Make the most of your flat panel experience by installing it flat against the wall with Peerless-AV IM740P In-Wall Articulating Arm. Installation is quick and easy thanks to the mount's stud-locating tabs that fit the in-wall box snugly between 16" wood stud centers. View the flat panel display in its virtually no-profile home position, or extend the arm up to 13.75" to watch it practically anywhere else within the room. This mount is so flat, it may even allow installations to meet ADA requirements.



Display size: 22"-40"




Max load: 80lb (36kg)

FEATURES

- Installs between 16" (406mm) wood stud centers
- Stud-locating tabs adjust 1/4" (6mm) left to right to accommodate stud spacing
- Includes articulating mount for 22"-40" displays
- Convenient installation of power and cables with removable outlet receptacle and cable access plates
- Height adjustment points in box to set display in desired position
- VESA® 75, 100, 200 x 100 and 200 x 200mm compliant
- Can be inverted to position display to the right or the left

SIMPLIFIED INSTALLATION

Stud locating tabs assist with a quick and easy installation

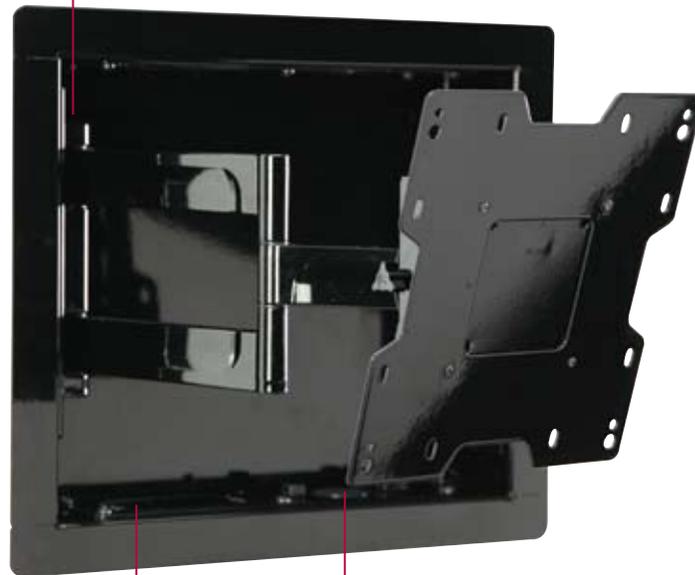

POWER, NO PROBLEM

Easily install an outlet with a built-in removable outlet receptacle

CLEAN APPLICATION

Integrated cable management provides ample space to run cables



Removeable outlet receptacle



Stud locating tabs



IM740P(-S) In-wall Mount for 22"-40" Flat Panel Displays


Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
IM740P(-S)	16.25" x 14.50" x 3.92"-15.97" (413 x 368 x 100-406mm)	18.3lb (8.3kg)	80lb (36kg)	Scratch resistant fused epoxy	IM740P: Gloss black IM740P-S: Gloss silver

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
IM740P(-S)	21" x 4.25" x 22.4" (533 x 108 x 569mm)	22.63lb (57.4kg)	IM740P: 735029255178 IM740P-S: 735029255185	In-wall box, PA740 mount, mounting hardware	1

All dimensions = inch (mm)

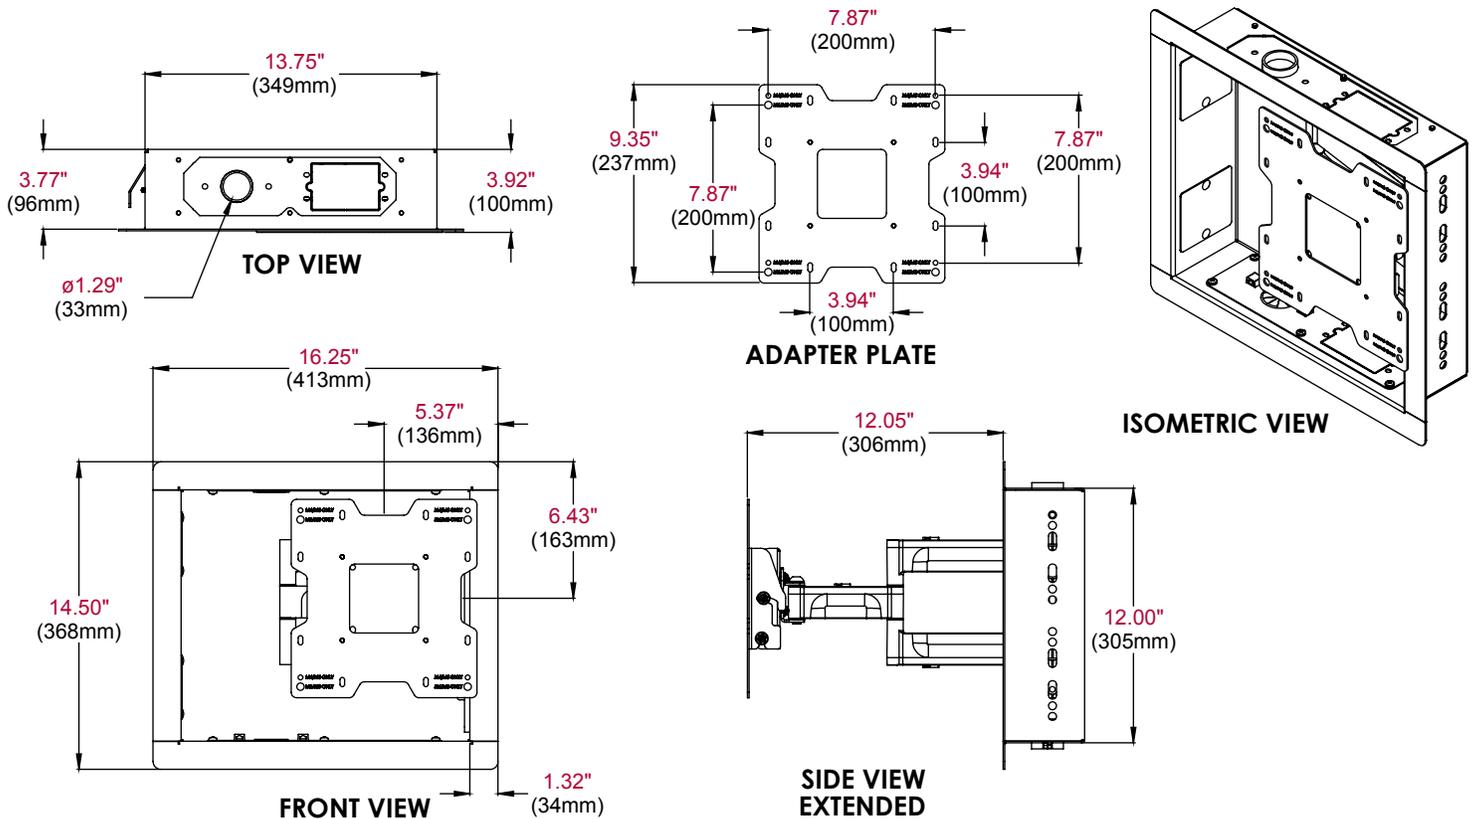

ARCHITECTS SPECIFICATIONS

The In-wall mount shall be Peerless-AV models IM740P/IM740P-S and shall be located where indicated on the plans. It shall feature adjustable 15° of forward tilt and 5° backward tilt. It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black or Silver Fused Epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.