

# IP7153/7154

Fixed Network Camera

**Day&Night • Progressive CCD • PoE**



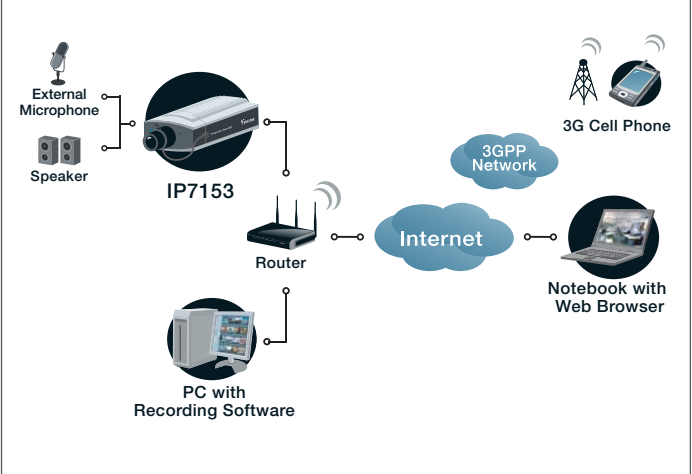
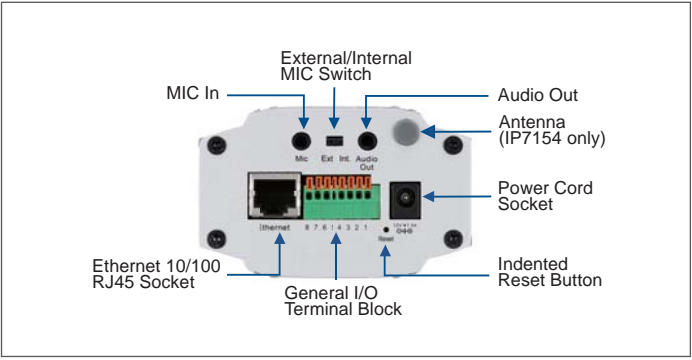

VIVOTEK's IP7153 (PoE) / 7154 (WLAN), equipped with a progressive scan CCD sensor, delivers superior-quality, crystal-clear video for professional surveillance applications such as monitoring banks, airports, parking lots, and traffic control, etc.

It can capture razor-sharp, high-resolution images of moving objects that traditional interlaced-scan techniques cannot achieve. Furthermore, working in combination with the high-performance CCD sensor is a removable IR-cut filter that can deliver high-quality images even under infrared illuminated conditions. With our self-developed VIVOTEK VVTK-1000 SoC, the camera simultaneously delivers dual streams for real-time monitoring.

The IP7153 / 7154 also comes with many useful functionalities that give users flexibilities such as built-in 802.3af compliant PoE (IP7153), 802.11b/g WLAN connection (IP7154), multi-lingual user interface, vari-focal CS mount lens, two-way audio via SIP protocol, and digital I/O for external sensor and alarm. The VIVOTEK IP7153/IP7154 is by far the best choice for a high-performance, professional surveillance system.

## Features

- > Sony Progressive Scan CCD Sensor in VGA Resolution
- > 2.9 ~ 8.2 mm Vari-focal, Auto-iris Lens
- > Removable IR-cut Filter for Day & Night Function
- > Real-time MPEG-4 and MJPEG Compression (Dual Codec)
- > Dual Streams Simultaneously
- > 3GPP Mobile Surveillance
- > Built-in 802.3af Compliant PoE (IP7153)
- > Built-in 802.11b/g WLAN (IP7154)
- > Two-way Audio via SIP Protocol
- > Digital I/O for External Sensor and Alarm
- > RS-485 Interface for Scanners, Pan/Tilts

Models	<ul style="list-style-type: none"> <li>IP7153 (PoE)</li> <li>IP7154 (WLAN)</li> </ul>	Approvals	<ul style="list-style-type: none"> <li>CE, LVD, FCC, VCCI, C-Tick</li> </ul>
System	<ul style="list-style-type: none"> <li>CPU: VVTK-1000 SoC</li> <li>Flash: 8MB</li> <li>RAM: 64MB</li> <li>Embedded OS: Linux 2.4</li> </ul>	Operating Environments	<ul style="list-style-type: none"> <li>Temperature: 0 ~ 50 °C (32 ~ 122 °F)</li> <li>Humidity: 20% ~ 80% RH</li> </ul>
Lens	<ul style="list-style-type: none"> <li>CS-mount, vari-focal, f = 2.9 ~ 8.2 mm, F1.0, auto-iris</li> <li>IR Corrected</li> <li>Removable IR-cut filter for day &amp; night function</li> </ul>	Viewing System Requirements	<ul style="list-style-type: none"> <li>OS: Microsoft Windows 2000/XP/Vista</li> <li>Browser: Mozilla Firefox, Internet Explorer 6.x or above</li> <li>Cell phone: 3GPP player</li> <li>Real Player: 10.5 or above</li> <li>Quick Time: 6.5 or above</li> </ul>
Angle of View	<ul style="list-style-type: none"> <li>26.7° ~ 69.0° (horizontal)</li> <li>20.0° ~ 51.0° (vertical)</li> </ul>	Installation, Management, and Maintenance	<ul style="list-style-type: none"> <li>RS-485 interface for scanners, pan/tilts</li> <li>Installation Wizard 2</li> <li>32-CH ST7501 central management software</li> <li>Supports firmware upgrade</li> </ul>
Shutter Time	<ul style="list-style-type: none"> <li>1/5 sec. to 1/15,000 sec.</li> </ul>	Applications	<ul style="list-style-type: none"> <li>SDK available for application development and system integration</li> </ul>
Image Sensor	<ul style="list-style-type: none"> <li>SONY 1/4" progressive scan CCD sensor in VGA resolution</li> </ul>	Warranty	<ul style="list-style-type: none"> <li>24 months</li> </ul>
Minimum Illumination	<ul style="list-style-type: none"> <li>0.2 Lux / F1.0</li> </ul>	System overview	
Video	<ul style="list-style-type: none"> <li>Compression: MJPEG &amp; MPEG-4</li> <li>Streaming: <ul style="list-style-type: none"> <li>Simultaneous dual-streaming</li> <li>MPEG-4 streaming over UDP, TCP or HTTP</li> <li>MPEG-4 multicast streaming</li> <li>MJPEG streaming over HTTP</li> </ul> </li> <li>Supports 3GPP mobile surveillance</li> <li>Frame rates: <ul style="list-style-type: none"> <li>MPEG-4: Up to 30/25 fps at 640x480</li> <li>MJPEG: Up to 30/25 fps at 640x480</li> </ul> </li> </ul>		
Image Settings	<ul style="list-style-type: none"> <li>Adjustable image size, quality and bit rate</li> <li>Time stamp and text caption overlay</li> <li>Flip &amp; mirror</li> <li>Configurable brightness, contrast, saturation and sharpness</li> <li>AGC, AWB, AES</li> <li>Automatic, manual or scheduled day/night mode</li> <li>BLC (Backlight Compensation)</li> <li>Supports privacy masks</li> </ul>	External View	
Audio	<ul style="list-style-type: none"> <li>Compression: <ul style="list-style-type: none"> <li>GSM-AMR speech encoding, bit rate: 4.75 kbps to 12.2 kbps</li> <li>MPEG-4 AAC audio encoding, bit rate: 16 kbps to 128 kbps</li> </ul> </li> <li>Interface: <ul style="list-style-type: none"> <li>Built-in microphone</li> <li>External microphone input</li> <li>Audio output</li> <li>External/Internal microphone switch</li> </ul> </li> <li>Supports two-way audio via SIP protocol</li> <li>Supports audio mute</li> </ul>		
Networking	<ul style="list-style-type: none"> <li>10/100 Mbps Ethernet, RJ-45</li> <li>Built-in 802.11b/g WLAN (IP7154)</li> <li>Protocols: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS and PPPoE</li> </ul>	Accessories	
Alarm and Event Management	<ul style="list-style-type: none"> <li>Triple-window video for motion detection</li> <li>One D/I and one D/O for external sensor and alarm</li> <li>Event notification using HTTP, SMTP or FTP</li> <li>Local recording of MP4 file</li> </ul>		
Security	<ul style="list-style-type: none"> <li>Multi-level user access with password protection</li> <li>IP address filtering</li> <li>Wireless: WEP, WPA-PSK, WPA2 (IP7154)</li> </ul>		
Users	<ul style="list-style-type: none"> <li>Live viewing for up to 10 clients</li> </ul>		
Dimension	<ul style="list-style-type: none"> <li>205.5 mm (D) x 82.1 mm (W) x 51.2 mm (H)</li> </ul>		
Weight	<ul style="list-style-type: none"> <li>Net: 568 g (IP7153)</li> <li>Net: 581 g (IP7154)</li> </ul>		
LED Indicator	<ul style="list-style-type: none"> <li>System power and status indicator</li> <li>System activity and network link indicator</li> </ul>		
Power	<ul style="list-style-type: none"> <li>12V DC</li> <li>24V AC</li> <li>Power consumption: Max. 4 W</li> <li>802.3af compliant Power-over-Ethernet (IP7153)</li> </ul>		

All specifications are subject to change without notice. Copyright©2009 VIVOTEK INC. All rights reserved.

Distributed by:



6F, No.192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan  
 Tel: +886 2 8245 5282 | Fax: +886 2 8245 5532 | E-mail: sales@vivotek.com

**VIVOTEK USA, INC.**

470 Lakeside Drive Suite C, Sunnyvale, CA 94085 USA

Tel: 408-773-8686 | Fax: 408-773-8298 | E-mail: salesusa@vivotek.com

