

SM5

Compact Vandal Resistant Surface Mount Dome – 5.9”



KEY FEATURES

Videolarm's SM5 series of vandal-resistant, surface mount enclosures provide superior camera protection in a compact size. Constructed out of rugged high-impact polycarbonate, the SM5 has been designed to withstand volatile attacks and varying harsh weather conditions.

The versatile compact enclosure is compatible with several of today's leading camera systems (fixed & PTZ), and includes an optically clear UV-stabilized thermoplastic polycarbonate 5.9" dome to ensure optimal performance. Thermostatically controlled heater / blower is standard for all outdoor models.

- Rugged polycarbonate camera enclosure
- Low profile design ideal for smaller camera systems
- Simple camera installation
- Designed for use with IP and analog camera systems (fixed & PTZ)
- Surface mount or Pendant mount, using a 1" standard pipe thread
- Meets IP66 standards
- Outdoor models available with thermostatically controlled heater / blower option
- Great for: Schools, Parking Garages, Warehouses, and other applications where the camera could be attached
- Includes impressive 5 year warranty

SM5

Outdoor and Indoor models for both Fixed and PTZ cameras:

Outdoor Model for 5.9" PTZ Camera:

SM5C2N: Compact vandal resistant polycarbonate surface mount dome. Clear dome w/ heater/blower, for an Network IP PTZ camera

Outdoor Model for 5.9" Fixed Camera:

SM5CF2: Compact vandal resistant polycarbonate surface mount dome. Clear dome w/ 24Vac input, heater/blower, (1) fixed camera bracket

Indoor Model for 5.9" PTZ Camera:

ISM5CN: Compact vandal resistant polycarbonate surface mount dome. Clear dome, for an Network IP PTZ camera

Indoor Model for 5.9" Fixed Camera:

ISM5CF: Compact vandal resistant polycarbonate surface mount dome. Clear dome, (1) fixed camera bracket



Tinted and Clear Domes available Change: "C" - Clear or "T" - Tinted

Camera Compatibility

Mounting brackets are included and can accommodate most of today's popular cameras.

PTZ Compatible Cameras:

ACTi: ACM-8201, ACM-8211, ACM-8511

Axis: 213, 216

Canon: VB-C50iR, VB-C10R, VB-C300

Elmo: PTC-401C IP, PTC-400C

Panasonic: BB-HCM381, BB-HCM580, WV-NS202, ,

WV-CF284, WV-CF294, WV-NF284, WVNF302

Sony: SNC-RZ50

Toshiba: IK-WB21A

Fixed Cameras: MCL 4"

Accepts camera and lens up to 4" in length.

Arecont Vision: AV5100

To view an up-to-date listing of compatible cameras please visit

www.videolarm.com/thirdparty.jsp

Wall Mount Accessories


The SM5 includes a pendent mount option for a 1" wall mount connection ideal for Videolarm's

WM10G aluminum gooseneck wall mount.

WM10G



Dimensions / Architectural Drawings

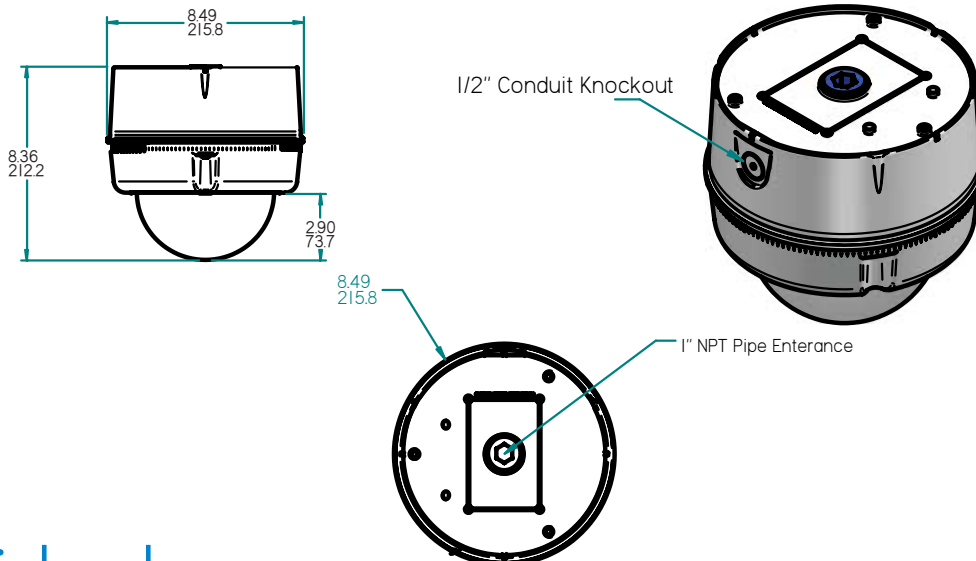

Mechanical Specifications

Size:	8.5" x 8.5" x 8.4"
Weight:	2.3 Lbs
Construction Body:	Polycarbonate
Trim Ring:	Polycarbonate
Dome:	Polycarbonate

Electrical Specifications

Power requirements:	
Heater and Blower	40 watts max
Camera:	24 vac

Environmental Specifications

Operating Temperature: (Outdoor Models)	-40° F to 122° F (-40° C to + 50° C)
Heater activates at:	+60° F (15° C)
Operating Humidity:	Up to 100%

Shipping Specifications

Model	Shipping Weight	Box Dimensions
SM5	5 lbs	9" x 9" x 11.375"

Certifications and Rating



RoHS