




Service Monitor with Adjustable Lenses

IV-35CH-multiview

- . 3" TFT color LCD monitor
- . Built-in 1/3" color CCD camera
- . Select/test the lens size with a turning wheel device
- . Five built-in lenses (4, 6, 8, 12 & 16mm)

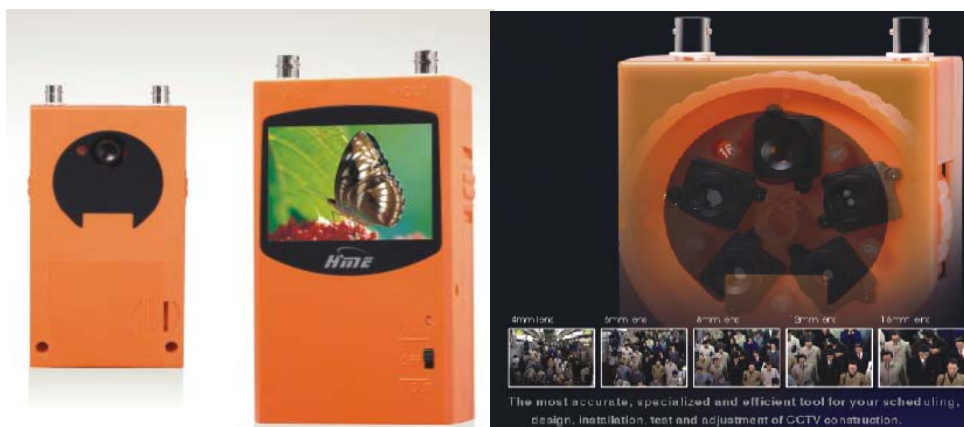

SPECIFICATION	IV-35CH-multiview
Pick-Up Element	1/3" Panasonic D5 Color CCD Sensor
Number of Pixels	512 (H) x 492 (V)
Resolution	420 TV lines
Min. illumination	0.5 Lux / F2.0
S/N Ratio	More than 48db (AGC off)
Electronic Shutter	1/60 (1/50) to 1/100,000 sec
Lens	Built-in 4, 6, 8, 12, 16mm
Consumption of the power source (with screen)	DC 12V \pm 10%, 260mA
The size of screen	3.5" (Diagonal)
Pixel pitch	0.150mm (W) x 0.216mm (H)
Effective display region	3" (W) x 1.98" (H)
Resolution	480 (W) x 234 (H)
The structure of pixel	R.G.B Delta
Input signal	1.0 Vp-p composite, 75 Ω
Output signal	1.0 Vp-p composite, 75 Ω
The connector of input image	BNC Connector
Image system	NTSC
Power source	No, 3 Alkaline battery 8pcs or DC 12V input
Consumption of the power source (with screen)	DC 12V, 170mA
Size	6.5" (H) x 3.5" (W) x 2" (D)
Weight	360g
Accessories	Leather Bag/Belt/Video Connector/BNC Connector/three port power cable