



Speed Bump Camera


IV-LSBC-1

Features:

- . Works in low light conditions because of the ambient light off the headlight of vehicle. Made from durable recycled rubber

Easy to install:

- . The Speed Bump is shipped with an epoxy to glue it on any surface
- . No need to have a trench for wire since this speed bump is sold with rubberized conduit to stick the wire in

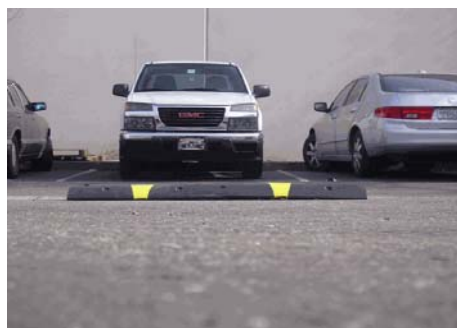

SPECIFICATION	IV-LSBC-1
Camera	
Pick up Element	Color 1/3" Sony Super HAD CCD
Resolution	480 TVL
Min. Illumination	0.2 Lux
AGC	Yes
Dimensions	2.5" (L) x 0.75" (D)
Lens	Video/Power Lead Vari-focal Lens: 3.6 mm
White Balance	Auto
Feature one	Wide Dynamic Working Power Tolerance
Feature two	Built-in Surge Voltage input protection
Operating Current	130mA
Video	
Video Standards	NTSC/PAL
Video Outputs	BNC
Power and Dimensions	
Power Source	DC12V
Bump Size	48" (L) x 2-5/8" (H) x 12" (W)
Net Weight	40 lbs
Feature one	6 Cat Eye Reflectors
Feature two	Two 1-1/4 Channels on bottom for running cable and wire
Material	Durable recycled rubber