




## Model NV-518AR

### Dual Passive Video/Audio Transceiver

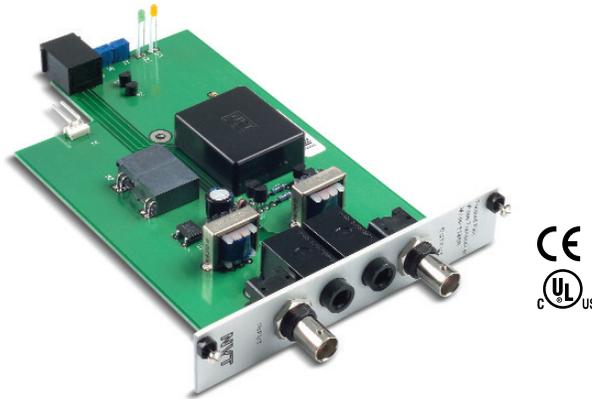

#### Features:

- Dual Full-motion monochrome or color video and audio at distances up to:
  - 750ft (225m) when used with another NV-418A or NV-418AR
  - 3,000ft (1km) when used with an active receiver such as the NV-518A or NV-518AR
- No power required
- Built-in transient protection
- Exceptional interference rejection
- Supports “up-the-coax” type control signals
- RJ45, BNC and 1/4” TRS
- Limited lifetime warranty

The NVT Model NV-518AR Dual Video/Audio Transceiver is a rack-mount passive (non-amplified) device that allows transmission of real-time monochrome or color video and audio over Unshielded Twisted-Pair (UTP) telephone wire. Baseband (composite) signals of any type are supported.

Applications include Security/Surveillance, Video Distribution, Video Conferencing, or Distance Learning.

The unparalleled interference rejection and low emissions of the Model NV-518AR allow video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of a shared or existing cable plant. “Up-the-coax” type signal may be sent over the same wire pair.

The NV-518AR card slides into the NV-RM15 chassis. For stand alone applications, use the NV-518A.

#### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940  
nvt.com • info@nvt.com



# Model NV-518AR

## Dual Video/Audio Transceiver

### Technical Specifications

#### VIDEO

Attenuation		
DC to 5 MHz	0.5 dB typ	
Common-mode / Differential-mode rejection		
15 KHz to 5 MHz	60 dB typ	
Impedance		
Coax, RCA jack	75 ohms	
UTP, RJ45 jack	100 ohms	

#### AUDIO

Attenuation		
20 Hz to 20 KHz	1.5 dB typ	
Impedance	600 ohms	
Signal: Line level	+4 dBm max	

#### LED INDICATORS

Power LED	Amber
Active LED	Green
	When path "a" signal received

#### WIRE TYPE

Network Wiring	Four Unshielded Twisted Pairs
	24-16 AWG (0,5-1,31mm)
	2 or better
Category type	
Impedance	100 ± 20 ohms
DC loop resistance	52 ohms per 1,000ft (18 ohms per 100m)
Differential capacitance	19 pF/ft max (62 pF/m max)
Wire length	path "a" 3,000ft (1km) path "d" 750ft (225m)
	When connected to a passive transceiver


\*\*Video signals traveling in opposite directions in the same wire bundle are limited to:

1,000ft (300m) over Category 2 or 3
2,000ft (600m) over category 5 or better wire

#### CONNECTOR INTERFACES

Video	Female BNC jacks
Audio	1/4in (6mm) phone jack

Tip= "+" Ring= "-" Sleeve= no connection  
Use either wiring:

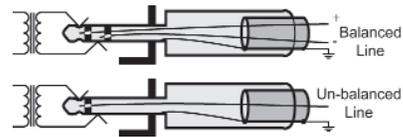

Twisted pair interface

RJ45 non-keyed jack wired for four twisted-pairs, as shown:



- Video "a" = Receive only
- Audio "c" = Audio "b"
- Video "d"

3ft (0,9) RJ45 patch cord included

#### POWER

No Power Required

#### ENVIRONMENTAL

Ambient temperature	-20 to +75 °C
Humidity (non-condensing)	0 to 95%
Transient Immunity	per ANSI / IEEE 587 C62.41

#### MECHANICAL

Dimensions, excluding connectors	5.75 x 3.60 x 1.15in (146 x 91,4 x 29,2mm)
Weight	
Transceiver alone	9oz (250g)
With transformer and patch cord	16oz (450g)
Material	Gray ABS
Mounting	Two 3M Dual Lock™ adhesive strips

Specifications subject to change without notice.

### Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA  
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940  
nvt.com • info@nvt.com

Copyright © 2005 NVT, Inc.  
411-159-1-A