

P3AC24-8-4LC

24VAC, 8 OUTPUT, 4 AMP CCTV POWER SUPPLY




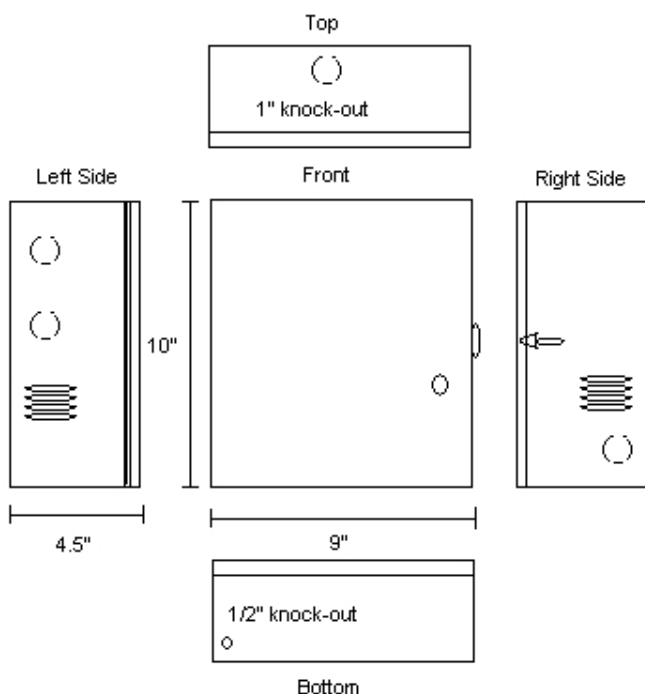
The P3AC24-8-4LC power supply is engineered to manage remote camera and accessory power requirements for various CCTV or general security applications. The P3AC24-8-4LC is designed with eight (8) individually fused, non-power limited outputs of 24VAC. Each unit is housed in a premium heavy gauge, side latching enclosure and includes a factory installed 3-prong line cord.

FEATURES

- Convenient screw terminal and fuse access
- Power ON/OFF switch
- AC power LED indicator (Green)
- Individual output LED indicates power is present (Red)
- Easy to identify automotive style fuses
- Side latching, side vented, heavy gauge metal enclosure
- Double coated polyurethane finish
- Knock-out for cam-lock
- Multiple 1" knock-outs to accommodate various wiring configurations
- Spare fuses and factory installed 3-prong line cord (6') (for testing purposes)
- Also available with optional PTC protected outputs - **P3AC24-8-4LC-CB** (non - UL)

SPECIFICATIONS

- Input 115VAC 50/60 HZ: .9A
- Output: 4A @ 24VAC (100VA)
- Individual output fuses are rated at 3A
- Main fuse is rated at 5A
- Unit maintains camera synchronization
- Transformer includes built-in thermal protection
- Maximum temperature range: 32°F to 120°F (0°C to 49°C)
- Ideal operating temperature: 70°F (21°C)
- For indoor use only
- UL listed 
- Enclosure dimensions: 10" (H) x 9" (W) x 4.5" (D)
- Shipping weight: 11 lbs



1-877-478-4733

WWW.PTHREE.COM

**Specifications subject to change without notice*