

PRODUCT SPECIFICATION

DESCRIPTION

The P3TV248UL is a CCTV power supply and distribution module. It is designed with 4 individually fused outputs for powering CCTV cameras and accessories. It will provide 24VAC via distibution to 8 fused outputs with a total of 4.0 Amps continous supply current.


FEATURES

- Input 115VAC 50/60 HZ 0.9 Amps
- 4 Amps 100VA supply current
- Eight 24VAC individually fused outputs
- Output fuses are rated at 3 Amps
- Main fuse is rated at 5 Amps
- Surge protected outputs
- AC power LED indicator
- Individual LED's for each output
- Power ON/OFF switch
- Spare fuses included
- Unit maintains camera synchronization
- Ease of installation saves time and eliminates costly labor

INSTALLATION INSTRUCTIONS

- Mount the P3TV248UL in desired location and secure
- Slide switch to OFF position
- Connect the AC 115VAC 50/60Hz to the black and white flying leads of the transformer Connect the green to an earth ground
- Connect each camera to terminals 1 to 8 marked 1 to 8 (+ & -)
- Slide switch to ON position
- Green LED will illuminate when AC power is present
- Red individual LED's will light when cameras or accessories are present and powered
- Upon completion of wiring secure enclosure door with catch.




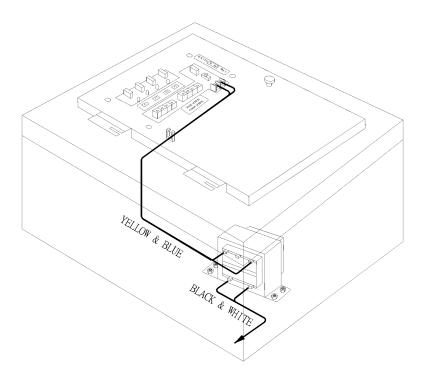

WARNINGS

To reduce the risk of electric shock, do not expose this product to rain or moisture For continuous protection against hazard, replace only with same type and rating of fuse

Enclosure Dimensions:

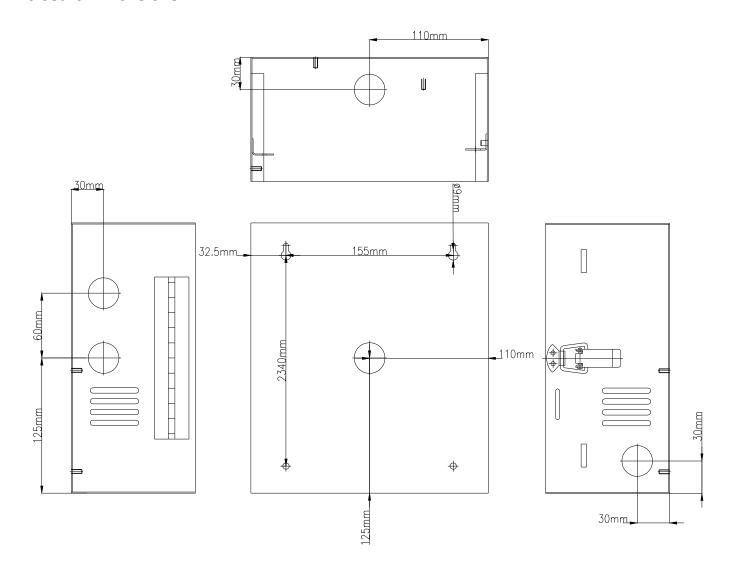

Appendix list:

Appendix list:				
Item	Description	Dimension	Volume	Memo
1	Instruction Sheet	A4	1	
2	Wire	18AWG 28cm	1	Black
3	Wire	18AWG 28cm	1	White
4	Wire	18AWG 28cm	1	Blue
5	Wire	18AWG 28cm	1	Yellow
6	AC CORE	180cm	1	
7	Linear Transformer	110VAC/24VAC, 100VA	1	

P3 is not responsible for any typographical errors. Product specifications are subject to change without notice.

