


DESCRIPTION

Full-range 8 cm, 2 k Ω /5 W speaker with sealed rear chamber, and high-molecular substance speaker vibration section to prevent floating dust particles from contaminating medical, chemical, or IC/photo film production.

SPECIFICATIONS

Dust Particle Prevention	No dust particle is produced by the method set out in JIS B-9926.		
Enclosure	Completely sealed type		
Speaker Unit	8 cm dynamic speaker (vibration section : high molecular substance)		
Rated Power	5 W		
Rated Impedance	2 kΩ		
Sound Pressure Level	87 dB (1 W, 1 m)		
Frequency Response	150 – 20,000 Hz		
Ambient Temperature	-20 °C – +55 °C		
Finish	Panel	: Alloy-coated ABS resin	
	Enclosure	: ABS resin, off-white	
	Punching net	: Stainless steel (SUS304)	
	Exposed fixing screw	: Stainless steel (SUS304)	
Dimensions	ø116 x 110 (D) mm		
Dimensions for Fixing Holes	ø98 mm		
Weight	620 g		
Accessories	Fixing gasket.....1, Ceiling mounting screws (Material:Stainless steel).....4		

APPEARANCE

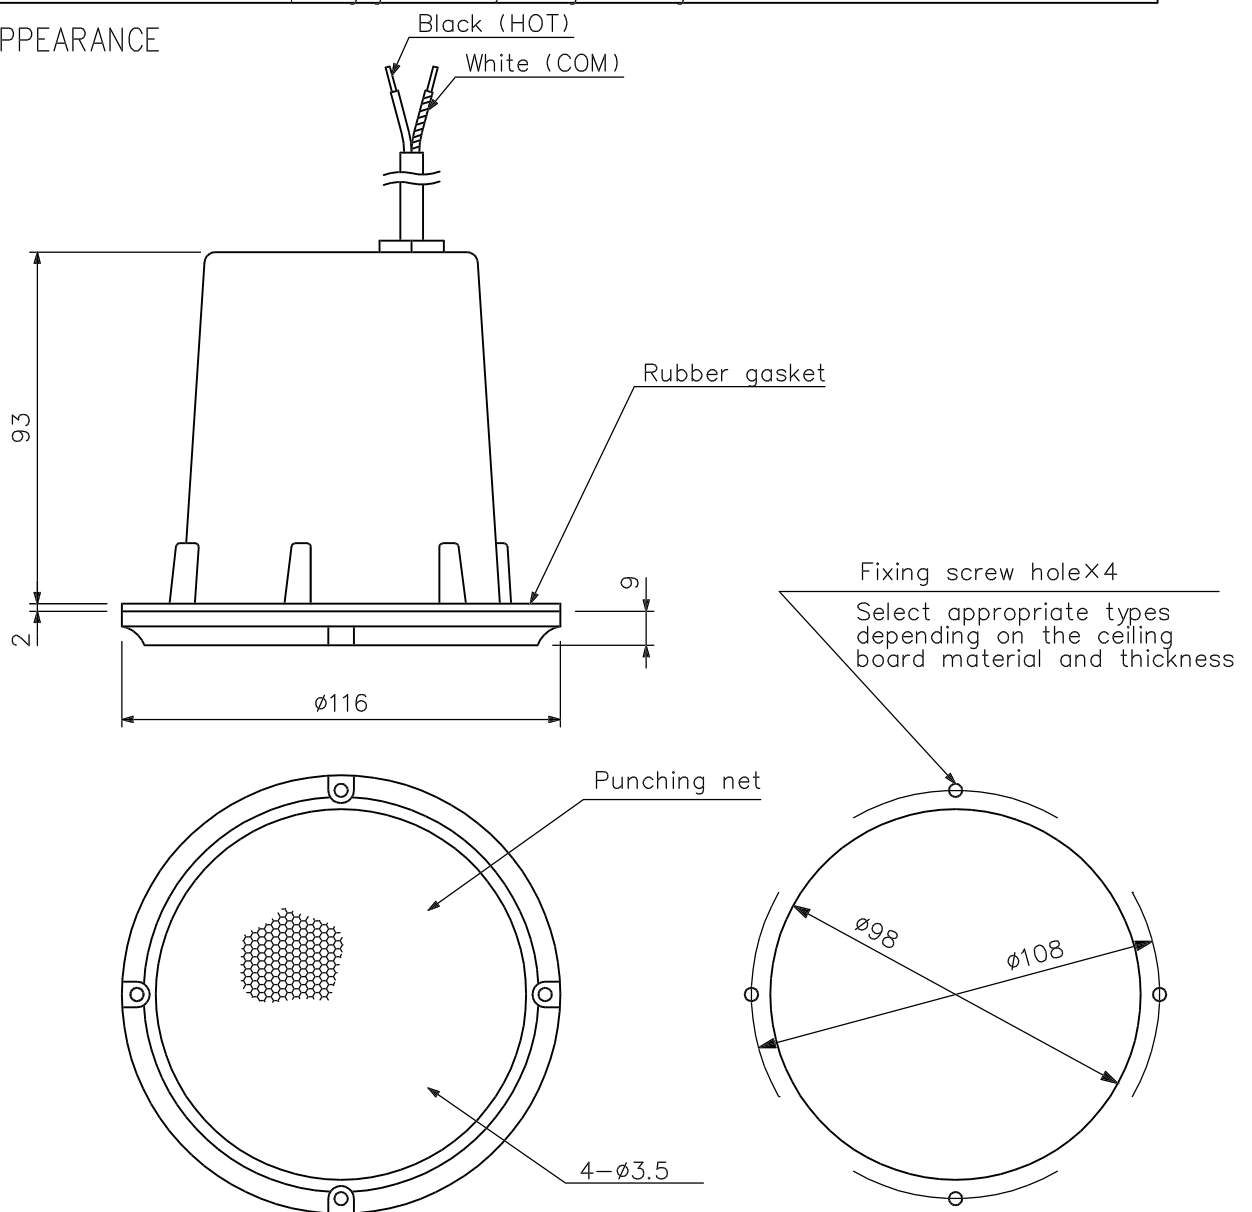

UNIT:mm SCALE:1/2

Dimension diagram for fixing holes