TECHNICAL DATA SHEET - 32" - 50" Flat Panel Conversion Kit



PLCK-1, PLCK-UNL

Converting from CRT TVs to flat panels? Peerless has made it simple with the industry's first flat panel conversion kit. Our Flat Panel Conversion Kits (PLCK) utilize existing Jumbo™ CRT wall arms and ceiling extension columns from CRT mounts and provide installers with everything needed to attach a flat panel TV. No drilling required, just remove the yolk-style bracket and replace with the conversion kit. PLCK models position the new flat panel screen in the same location and viewing angle as the previous CRT screen to eliminate a new screen layout plan in the facility. The PLCK Flat Panel Conversion Kit can be attached to wall, ceiling and multi-display mounts and are the ideal solution for renovations in restaurants, bars, health clubs, fitness rooms, classrooms and stadiums.

Features:

- Places the flat panel screen in the same location as the previous CRT screen
- Retrofits to any Jumbo[™] single or double wall arm
- Retrofits to any 1 1/2" NPT pipe for ceiling applications
- Offers 0° to 20° tilt and 360° swivel for optimal viewing angles
- PLCK-UNL includes universal adapter, 18" extension column, extension column connector and theft-deterrent security hardware
- PLCK-1 includes 18" extension column and extension column connector. Screen-specific adapter plate required
- Cords can be routed up through the extension column for cable management




Weight: Weight:

11.48 lb (5.2 kg) 19.71 lb (8.9 kg) Shipping weight: Shipping weight: 14.54 lb (6.6 kg) 23.88 lb (10.8 kg) Max Load Capacity: **Max Load Capacity:** 125 lb (57 kg) screen 125 lb (57 kg) screen

Shipping Carton dimensions: Shipping Carton dimensions:

L= 24.5 in. (622 mm) **L**= 35.1 in. (892 mm) **W**= 14.13 in. (359 mm) **W**= 21.8 in. (554 mm) **H**= 5.5 in. (140 mm) **H**= 4.3 in. (109mm)

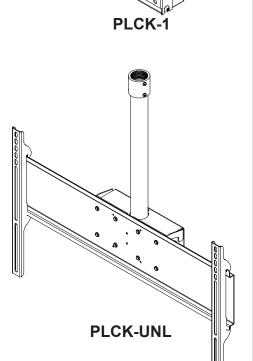

ARCHITECTS SPECIFICATIONS


32" - 50" Flat Panel Conversion Kit shall be a Peerless model PLCK-1, PLCK-UNL and shall be installed where indicated on the plans. It shall be constructed of heavy gauge cold rolled steel and finished with scratch resistant Black Fused Epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.


708-865-8870 800-865-2112 Fax 708-865-2941


TECHNICAL DATA SHEET

MODEL: PLCK-1, PLCK-UNL

ALL DIMENSION = INCH (MM)

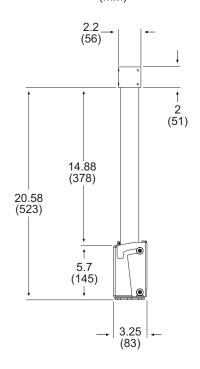

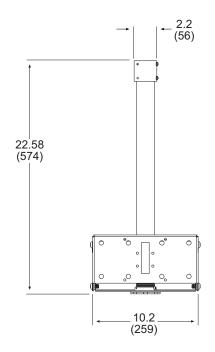




<u>Side View</u> (PLCK-1, PLCK-UNL without adapter plate)

Front View
(PLCK-1, PLCK-UNL without adapter plate)

<u>Top View</u> (PLCK-1, PLCK-UNL without adapter plate)

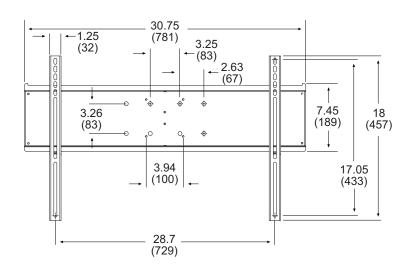

Adapter Bracket Detail (PLCK-UNL ONLY)