

# **PRG Adjustable Projector** Ceiling/Wall Mount Kit

For Projectors up to 50 lb (22 kg)

## **MODELS**

#### Universal Models:

Includes theft resistant hardware for attaching projector to mount

With 8.7"-12.8" (221-325 mm) ceiling extension and 9.72"-13.86" (247-352 mm) wall extension:

PRG-EXA Black **PRG-EXA-S** Silver **PRG-EXA-W** White

With 12.68"-20.67" (322-525 mm) ceiling extension and 13.74"-21.73" (349-552 mm) wall extension:

PRG-EXB Black **PRG-EXB-S** Silver PRG-EXB-W White

With 19.13"-32.91" (486-836 mm) ceiling extension:

PRG-EXC Black PRG-EXC-S Silver PRG-EXC-W White

## SCREEN ADAPTER



#### Mounting pattern

Universal Models:

Up to 17.63" (448 mm)

## **SPECIFICATIONS**



## Distance from ceiling

8.7"-12.8" (221-325 mm) PRG-EXA(-S)(-W): PRG-EXB(-S)(-W): 12.68"-20.67" (322-525 mm) PRG-EXC(-S)(-W): 19.13"-32.91" (486-836 mm)



Distance from wall

9.72"-13.86" (247-352 mm) PRG-EXA(-S)(-W): PRG-EXB(-S)(-W): 13.74"-21.73" (349-552 mm)



Tilt | Swivel | Roll

±20° | 360° | ±10°



Max load

50 lb (22 kg)

Product Dimensions (W x D)

> 8.5"-17.63" x 8.5"-17.63" (216-448 x 216-448 mm)

## **Mounting Surfaces**

Wood joist, wood stud, concrete and other structures (Other structures require accessory)

### Ship Weight

PRG-EXA(-S)(-W): 7.75 lb (3.52 kg) PRG-EXB(-S)(-W): 8.11 lb (3.68 kg) 9.28 lb (4.21 kg) PRG-EXC(-S)(-W):

# **CERTIFICATIONS**









## **ACCESSORIES**



ACC575:

Threaded Connector .....pg# 128 Accessorv...



ACC-EXC: Extension Column

for EXC Extension Kit .....pg# 128

1. Spider® Universal Adapter Plate extends up to 17.63" (448 mm) to fit most projector models

- 2. Continuous channel design for uninterrupted drop length or wall extension adjustments
- 3. Safety catch designed into extension to ensure user and equipment safety
- 4. Internal cable management channels for clean, clutter-free appearance
- 5. Mounts to ceiling or wall\* with included wall mount interface
  - \* PRG-EXA and PRG-EXB models only. PRG-EXC is not wall mountable due to its extensive reach.
- 6. Includes PRG Precision Gear Projector Mount with ImageLock™ for precise image alignment:

Tilt: ±20° Swivel: 360° Roll: ±10°


7. Two adjustment knobs control tilt and roll image alignment. Engage using a Phillips screwdriver or extend knobs to align by hand





## **TECHNICAL DRAWINGS**

For expanded product information and technical data visit www.peerlessmounts.com

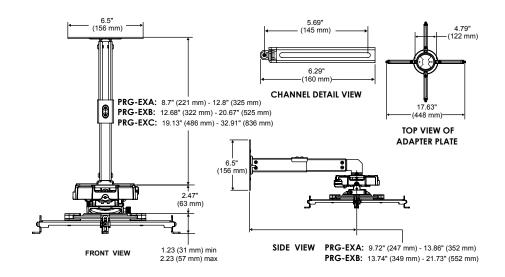

To verify mount compatibility with any LCD, plasma or projector model use MountFinder™ at www.peerlessmounts.com



**CLICK:** www.peerlessmounts.com

