


SCC-C6323

10X Zoom Mini SmartDome™ Camera



Dimensions (unit : in)

Front/Rear Panel

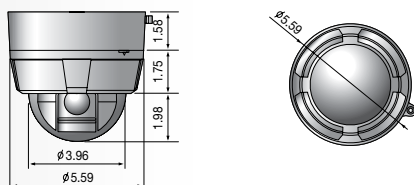

Summary

The SCC-C6323 Mini SmartDome™ camera has a 10X optical zoom and a 10X digital zoom, allowing a total zoom of 100X. The SCC-C6323 is easy to install, and works great in a retail environment.

Features

- 1/4" 410K/470K Pixels Super-HAD IT CCD
- 10x(f=3.8~38 mm) Optical Zoom Lens (10x D-Zoom)
- High-Resolution : 520(Color) / 570(B/W) TV Lines
- Min. illumination (15IRE, Sens-up128x), 0.0014 Lux(Color), 0.00014 Lux(B/W)
- Day & Night function (Moving Filter)
- Full Auto Focus function
- Privacy Mask Zone (4 Area)
- 360° Endless PAN (Slip-ring), 0~90° Tilt
- PAN Speed (Max 360°/sec), Tilt Speed (360°/sec)
- Multi-Protocol support
- Remote Control : RS485
- Time & Day Scheduling function
- Vector Driving (Panning/Tilting operation simultaneously)
- Plastic case, Indoor, 142(Ø) x 126(H)mm
- AC24V/DC12V

Recommended Accessories

SADT-937WM, Wall Mount

*See accessories page for more options

100X Power Zoom (10X Optical, 10X Digital)

The camera uses a 10X optical zoom, along with a 10X digital zoom, resulting in 100X zooming capability. The 100X Power Zoom combined with the auto focus function makes object identification easier.



High Resolution (520 TV Lines)

This camera can achieve a high resolution of 520 TV Lines using the full digital image processing and special algorithm technologies.



Conventional



520 TVL

SCC-C6323

10x Zoom Mini SmartDome™ Camera



Specifications

Camera Type Image	Color/BW		Color
	Device		Super-HAD IT CCD
	Size (inch)		1/4"
	Pixels	Total	NTSC: 811 x 508 PAL: 795 x 596
Scanning			Effective
			NTSC: 768 x 494 PAL: 752 x 582
	System		Interface
	Horizontal Frequency	Internal Mode (Hz)	NTSC: 15,734 PAL: 15,625
Min. Scene Illumination	Vertical Frequency	Internal Mode (Hz)	NTSC: 59.94 PAL: 50
		Sens-Up Off	50 IRE
		30 IRE	Color: 0.60Lux B/W: 0.06Lux
	Sens-Up 128 Times	15 IRE	Color: 0.36Lux B/W: 0.036Lux
		50 IRE	Color: 0.18Lux B/W: 0.018Lux
		30 IRE	Color: 0.0047Lux B/W: 0.00047Lux
	15 IRE	30 IRE	Color: 0.0028Lux B/W: 0.00028Lux
		15 IRE	Color: 0.0014Lux B/W: 0.00014Lux
Pan/Tilt	Speed	Manual Pan (°/sec.)	0.05~360
		Preset Pan (°/sec.)	360
		Manual Tilt (°/sec.)	0.05~360
		Preset Tilt (°/sec.)	360
	Range	Panning (°)	0~360 (Endless)
		Tilting (°)	90
	Number of Auto PAN		8
	Number of Presets		127
	Number of Patterns		4
Functions	Number of Privacy Zones		4
	Day/Night		Auto/Day/Night (IR Cut Filter)
	D-Zoom		Yes (~10x)
	High Speed Shutter		NTSC: Yes (1/60 ~ 1/120,000 sec) PAL: Yes (1/50 ~ 1/120,000 sec)
	Sens Up		OFF/AUTO
	BLC		LOW/MIDDLE/HIGH/OFF
	AGC		NORMAL/HIGH/OFF
	Anti-Vandal		No
	Camera ID		dip switch adjustable
	White Balance		Auto/Manual (Red, Blue Gain Adj.)
	Line Lock		Yes
	PIP		Yes
	ELC		Yes
Resolution	Horizontal (TV Lines)		Color: 520 / B/W: 570
	Vertical (TV Lines)		350
Video Output	VBS 1.0Vp-p		VBS 1.0Vp-p
S/N Ratio	S/N Ratio (dB)		50dB (AGC off)
Lens	Focal Length (mm)		3.8 ~ 38
	Zoom Ratio		10x Optical
	Aperture Ratio		F1.8(W)/F2.8(T)
	Viewing Angle	Tele (°)	5.58°(H) x 4.27°(V)
		Wide (°)	51.2°(H) x 39.3°(V)
	Lens Drive Type		DC Auto Iris
	Mount Type		Board-in Type
OSD	OSD		Yes
	Language		E/F/D/S//P/R

Alarm	Input	2
	Output	1 relay
Remote Control	RS485	Yes
Environmental Conditions	Operating Temperature (°C)	-10°C ~ + 50°C
	Humidity (%)	Less than 90%
Power	Power Requirement (V)	NTSC: DC12V/AC24V 60Hz PAL: DC12V/AC24V 50Hz
		Power Consumption (W)
	AC24V(10W) / DC12V(8W)	
Physical Specification	Dimensions (WxHxD)	
	142(Ø) X 126(H)mm 142(Ø) X 4.9(H)inch	
	Weight	600g (1.3 lbs)
Color		Body
		White