


SCC-C6325

Anti-Vandal, Weather Resistant, 10X Zoom
Mini SmartDome™ Camera



Dimensions (unit : in)

Front/Rear Panel

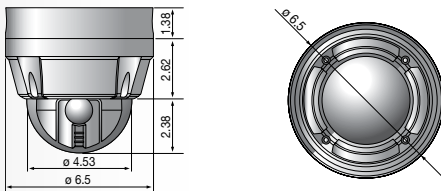

Summary

The SCC-C6325 Mini SmartDome™ camera has a 10X optical zoom and a 10X digital zoom, allowing a total zoom of 100X. The SCC-C6325 is easy to install, vandal and weather resistant, and works great in a retail environment.

Features

- 1/4" 410K/470K Pixels Super-HAD IT CCD
- 10x(f=3.8~38 mm) Optical Zoom Lens (10x D-Zoom)
- High-Resolution : 520(Color) / 570(B/W) TV Lines
- Min. illumination (15IRE, Sens-up 128x), 0.0014 Lux(Color), 0.00014 Lux(B/W)
- Day & Night function (Moving Filter)
- Full Auto Focus function
- Privacy Mask Zone (4 Area)
- 360° Endless PAN (Slip-ring), 0~180° Tilt
- PAN Speed (Max 360°/sec), Tilt Speed (360°/sec)
- Multi-Protocol support
- Remote Control : RS485
- Time & Day Scheduling function
- Vector Driving (Panning/Tilting operation simultaneously)
- Anti-Vandal, IP-66, 165(Ø) x 162(H)mm
- AC24V/DC12V

Recommended Accessories

SADT-937WM, Wall Mount

*See accessories page for more options

100X Power Zoom (10X Optical, 10X Digital)

The camera uses a 10X optical zoom, along with a 10X digital zoom, resulting in 100X zooming capability. The 100X Power Zoom combined with the auto focus function makes object identification easier.



Vandal and Weather Resistant (IP66)

Built for the toughest conditions, the SCC-C6325 is suited for external installation, thanks to its special structure that resists water and dust.



Weather Resistant



Vandal Resistant

SCC-C6325

Anti-Vandal, Weather Resistant, 10X Zoom
Mini SmartDome™ Camera



Specifications

Camera Type	Color/BW		Color	
Image	Device		Super-HAD IT CCD	
	Size (inch)		1/4"	
	Pixels	Total	NTSC: 811x 508 PAL: 795 x 596	
		Effective	NTSC: 768 x 494 PAL: 752 x 582	
Scanning	System		Interlace	
	Horizontal Frequency	Internal Mode (Hz)	NTSC: 15,734 PAL: 15,625	
	Vertical Frequency	Internal Mode (Hz)	NTSC: 59.94 PAL: 50	
Min. Scene Illumination	Sens-Up Off	50 IRE	Color: 0.60Lux B/W: 0.06Lux	
		30 IRE	Color: 0.36Lux B/W: 0.036Lux	
		15 IRE	Color: 0.18Lux B/W: 0.018Lux	
	Sens-Up 128 Times	50 IRE	Color: 0.0047Lux B/W: 0.00047Lux	
		30 IRE	Color: 0.0028Lux B/W: 0.00028Lux	
		15 IRE	Color: 0.0014Lux B/W: 0.00014Lux	
	Pan/Tilt	Speed	Manual Pan (°/sec.)	0.05~360
			Preset Pan (°/sec.)	360
Manual Tilt (°/sec.)			0.05~360	
Preset Tilt (°/sec.)			360	
Range		Panning (°)	0~360 (Endless)	
		Tilting (°)	180	
Number of Auto PAN		8		
Number of Presets		127		
Number of Patterns		4		
Functions		Number of Privacy Zones		4
	Day/Night		Auto/Day/Night (IR Cut Filter)	
	D-Zoom		Yes (~10x)	
	High Speed Shutter		NTSC: Yes (1/60 ~ 1/120,000 sec) PAL: Yes (1/50 ~ 1/120,000 sec)	
	Sens Up		OFF/AUTO	
	BLC		LOW/MIDDLE/HIGH/OFF	
	AGC		NORMAL/HIGH/OFF	
	Anti-Vandal		Yes	
	Camera ID		dip switch adjustable	
	White Balance		Auto/Manual (Red, Blue Gain Adj.)	
	Line Lock		Yes	
	PIP		Yes	
	ELC		Yes	
	Resolution	Horizontal (TV Lines)		Color: 520 / B/W: 570
Vertical (TV Lines)		350		
Video Output	VBS 1.0Vp-p		VBS 1.0Vp-p	
S/N Ratio	S/N Ratio (dB)		50dB (AGC off)	
Lens	Focal Length (mm)		3.8 ~ 38	
	Zoom Ratio		10x Optical	
	Aperture Ratio		F1.8(W)/F2.8(T)	
	Viewing Angle	Tele (°)	5.58°(H) x 4.27°(V)	
		Wide (°)	51.2°(H) x 39.3°(V)	
	Lens Drive Type		DC Auto Iris	
	Mount Type		Board-in Type	
OSD	OSD		Yes	
	Language		E/F/D/S/I/P/R	

Alarm	Input	2
	Output	1 relay
Remote Control	RS485	Yes
Environmental Conditions	Operating Temperature (°C)	-10°C ~ + 50°C
	Humidity (%)	Less than 90%
Power	Power Requirement (V)	NTSC: DC12V/AC24V 60Hz PAL: DC12V/AC24V 50Hz
	Power Consumption (W)	AC24V(10W) / DC12V(8W)
Physical Specification	Dimensions (WxHxD)	
	165(Ø) X 162(H)mm 165(Ø) X 6.3(H)inch	
	Weight	
	1,850g (4.0 lbs)	
	Color	Body
		White