


SHR12WI

HIGH RESOLUTION

2/3" 12mm F1.4

Focal Length		12mm
Iris		F1.4~16
Angular Field of View (H × V)	2/3"	38.3° × 26.2°
	1/2"	28.3° × 21.4°
	1/3"	21.4° × 16.1°
Distortion (TV)	2/3"	-0.07%
	1/2"	-0.05%
	1/3"	-0.04%
Minimum Object Distance		0.15m
Optical Back Focal Distance		11.7mm (In Air)
Resolution Center/Corner		100 line/mm / 80 line/mm
Front/Rear Effective Diameter		ø15.8mm / ø14.1mm
Exit Pupil		-215mm
Filter Size		27mm P0.5
Mount		C-Mount
Operation Temperature		-10° to +45°C
Weight		75g

- High resolution
- Low distortion
- Metal body and mount
- Locking screws

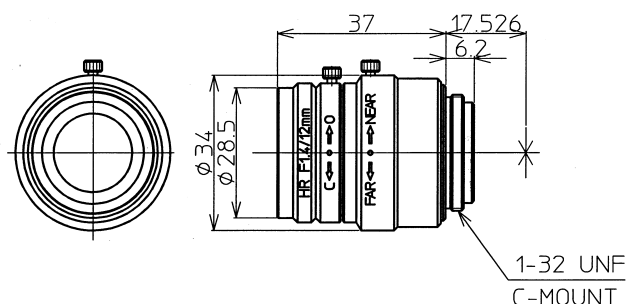

SHR16WI

HIGH RESOLUTION

2/3" 16 mm F1.4

Focal Length		16mm
Iris		F1.4~16
Angular Field of View (H × V)	2/3"	30.0° × 22.7°
	1/2"	21.8° × 16.4°
	1/3"	16.4° × 12.3°
Distortion (TV)	2/3"	-0.05%
	1/2"	—
	1/3"	—
Minimum Object Distance		0.2m
Optical Back Focal Distance		13.1mm (In Air)
Resolution Center/Corner		100 line/mm / 80 line/mm
Front/Rear Effective Diameter		ø20.2mm / ø15.5mm
Exit Pupil		340mm
Filter Size		25.5mm P0.5
Mount		C-Mount
Operation Temperature		-10° to +45°C
Weight		81g

- High resolution
- Low distortion
- Metal body and mount
- Locking screws

