

SMT-3223

32" TFT-LCD Monitor




Key Features

- Support up to 1366 x 768 resolution
- High contrast ratio 3500 : 1
- Fast response time 8ms
- 120Hz motion technology

Dimensions

Unit : mm (inch)

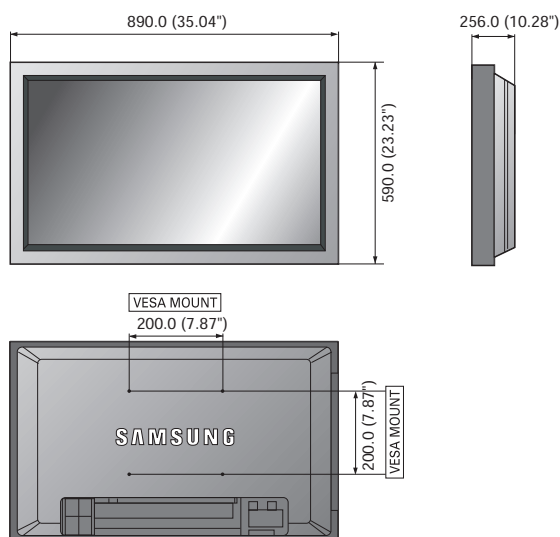

Technical Specifications

SMT-3223

DISPLAY		
Screen Size		32"
Max. Resolution		1,366 x 768
Brightness		450cd/m ²
Contrast Ratio		3,500 : 1
Aspect Ratio		16 : 9
Viewing Angle (H/V)		178° / 178°
Display Color		16.7million
Response Time		8ms (G to G)
Video System		NTSC / PAL
Panel Life		50,000hours
Filter Type		3D combfilter
INTERFACE		
Video	Connector	CVBS, HDMI 1, HDMI 2, Component (D-sub 15pin)
	Connector	Analog D-sub, DVI-D, Display port
	Input Signal	0.7 Vp-p ±5%
RGB / DVI	Available Format	640 x 350@70Hz
		720 x 400@70Hz
		640 x 480@60Hz/72Hz/75Hz (VGA)
		800 x 600@56Hz/60Hz/72Hz/75Hz (SVGA)
		1,024 x 768@60Hz/70Hz/75Hz (XGA)
		1,152 x 864@75Hz
		1,152 x 870@75Hz
		1,280 x 960@60Hz
		1,280 x 1,024@60Hz/75Hz (SXGA)
		1,360 x 768@60Hz
1,366 x 768@60Hz		
HDMI	Connector	HDMI 1, HDMI 2
	Available Format	640 x 480p@60Hz, 720 x 480i@60Hz, 720 x 480p@60Hz 720 x 576i@50Hz, 720 x 576p@50Hz, 1,280 x 720p@50Hz/60Hz 1,920 x 1,080i@50Hz/60Hz, 1,920 x 1,080p@50Hz/60Hz
Audio	Connector	RCA (L/R), Stereo mini jack
	Output Signal	Loop-through line level (PC only), Speakers : 2 x 5W
Application Support		Remote controller
ON SCREEN DISPLAY		
Functions		VESA™ DPM compatible
Language		English, Spanish, French, German, Italian, Portuguese, Russian, Swedish, Turkey, Taiwanese, Chinese, Japanese, Korean
GENERAL		
Electrical	Input Voltage	100 ~ 240V AC (50/60Hz)
	Power Consumption	Type 150W
Environmental	Operating Temperature	0 ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	10% ~ 80% (Non-condensing)
Mechanical	Dimensions with Stand (WxHxD)	890.0 x 590.0 x 256.0mm (35.04" x 23.23" x 10.08")
	Dimensions without Stand (WxHxD)	780.0 x 482.0 x 109.0mm (30.7" x 19" x 4.3")
	Weight	13.7Kg (30.2 lb)
	Cabinet Color	Black
	Rack Mounts	Optional
	VESA Mounts Interface	200 x 200mm
Accessory	SBM-320ST	