

Compact and Affordable 1080p HD Security Camera

- Excellent 1080p HD picture quality, supporting H.264 at 15 fps
- 3 Megapixel (2048 x 1536) maximum resolution
- Three codecs (H.264, MPEG-4, JPEG) and a dual streaming capability
- The Exmor™ CMOS sensor incorporated to deliver high image quality and low noise




Key Features

- Compact and stylish design for discreet surveillance.



- Electrical Day/Night function to switch to Day or Night mode depending on the light level.
- Stream Squared function allows simultaneous streaming of two 4:3 aspect ratio videos in user selectable SD resolutions. User can select the entire image or a portion of the image from the original field of view and resize to SD resolution or lower for each stream. With this feature, the SNC-CH210 can replace two SD cameras installed in the same line of view.

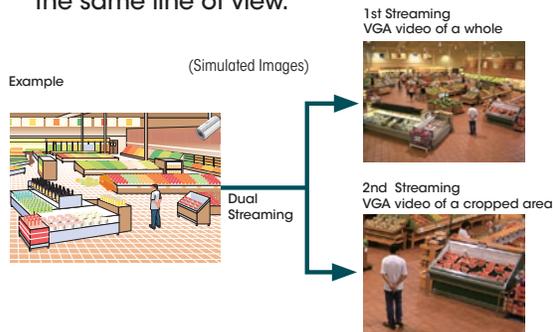

- DEPA™ Intelligent Video Analytics system can be set up with a DEPA-enabled recorder.



- Analog monitor output (AV mini jack).
- Powered by PoE (Power over Ethernet) for simple installation.
- Recording software (RealShot Manager Lite) is bundled to start recording and monitoring instantly.
- ONVIF™ (Open Network Video Interface Forum) software that ensures greater interoperability and more flexibility in building multiple-vendor systems.




SPECIFICATIONS

SNC-CH210	
Camera	
Image device	1/2.8 type progressive scan Exmor CMOS sensor
Minimum illumination	2.0lx (AGC 38dB / 50IRE[IP])
Number of effective pixels (H x V)	3 Megapixel (2096x1561)
Electronic shutter speed	1s to 1/10000s
Gain control	Auto
Exposure control	Auto, EV Compensation, Auto Slow Shutter
White balance mode	Auto (ATW, ATW-PRO) , Preset, One-push WB, Manual
Lens type	fixed
Horizontal viewing angle	88 degrees
Focal length	f=3.3 mm
F-number	F2.8
Minimum object distance	500 mm
Camera Features	
Day/Night	Yes (electrical D/N)
Noise reduction	Yes
Image	
Codec image size (H x V)	2048x1536(JpegOnly), 1920x1080, 1600x1200, 1680x1056, 1440x912, 1280x1024, 1280x960, 1376x768, 1280x800, 1280x720, 1024x768, 1024x576, 768x576, 720x576, 704x576, 800x480, 720x480, 640x480, 640x368, 384x288, 352x288, 320x240, 320x192, 176x144
Video compression format	H.264, MPEG-4, JPEG
Codec streaming capability	Dual streaming
Maximum frame rate	H.264: 15fps (1920x1080) / 30fps (1280x720) JPEG: 12fps (2048x1536) / 15fps (1920x1080) / 30fps (1280x720) MPEG-4: 15fps (1920x1080) / 30fps (1280x720)
Scene Analytics	
Intelligent motion detection	Yes
Network	
Protocols	IPv4, IPv6, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, FTP (client only), SMTP, DHCP, DNS, NTP, RTP/RTCP, RTSP, SNMP (MIB-2)
ONVIF software	Yes
Number of clients	5
Authentication	IEEE802.1X
Analog Video Output	
Signal system	NTSC / PAL
Interface	
Ethernet	10BASE-T / 100BASE-TX (RJ-45)
Analog monitor output	MiniJack
Sensor input	x 1
General	
Weight	3.5 oz (100g)
Dimensions	ø 44 x 93 mm (1 3/4 x 3 3/4 inches)
Power requirements	PoE (IEEE802.3af compliant)
Power consumption	2.4W
Starting temperature	0°C to 50°C (32°F to 122°F)
Working temperature	0°C to 50°C (32°F to 122°F)
Storage temperature	-20°C to +60°C (-4°F to +140°F)
Safety regulation	UL2044, FCC 15B Class A, IC Class A, IEC60950-1, EN55022(A)+EN55024+EN50130-4, VCCI Class A, C-Tick Class A
System Requirements	
Operating system	Microsoft Windows XP®, Windows Vista® (32bit), Windows® 7 (32bit)
Processor	Intel Core2 Duo® 2 GHz or higher
Memory	1 GB or more
Web browser	Microsoft Internet Explorer® Ver. 6.0, Ver. 7.0, Ver. 8.0 Firefox® Ver.3.5 (Plug-in free viewer only) Safari® Ver. 4.0 (Plug-in free viewer only) Google® Chrome Ver.4.0 (Plug-in free viewer only)
Supplied Accessories	
Operating system	CD-ROM (User's Guides, and supplied programs) Installation manual B&P Warranty Booklet Front Sheet (with logo) Front Sheet (without logo) Sensor input cable


*The SNC-CH210 includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org>).

SYSTEM CONFIGURATION

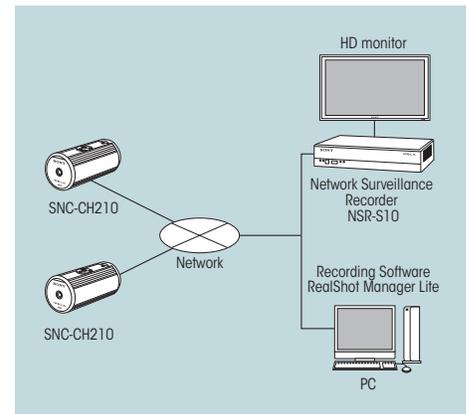

DIMENSIONS

Unit: inches (mm)

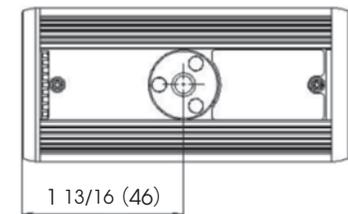

© 2010 Sony Electronics Inc. All rights reserved.
 Reproduction in whole or in part without written permission is prohibited.
 Features and specifications are subject to change without notice.
 Weights and measurements are approximate
 Sony, 'make.believe', IPELA, DEPA, Exmor and their respective logos
 are trademarks of Sony.
 All other trademarks are the property of their respective owners.