

SNV-5080R



1.3Megapixel HD Vandal-Resistant
IR Dome Camera




Key Features

- 3 ~ 8.5mm (2.8x) motorized vari-focal lens
- Max. 1.3M (1280 x 1024) resolution
- HD (720p) display support
- H.264 / MJPEG / MPEG-4 multiple codecs
- IP66, SSSR, SSNRIII, PoE
- Built in IR LED, viewable length of 50ft

Dimensions

Unit : mm (inch)

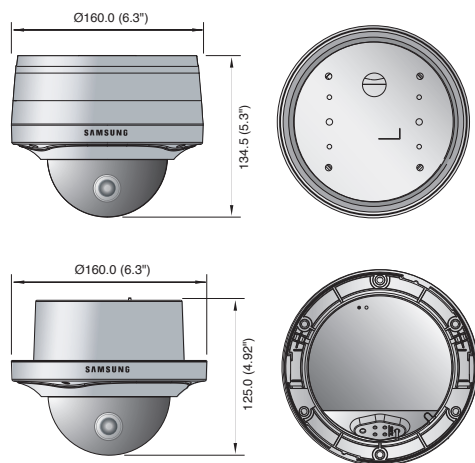

Technical Specifications

SNV-5080RN/P	
VIDEO	
Imaging Device	1/3" 1.3M PS CMOS
Total Pixels	1,384(H) x 1,076(V)
Effective Pixels	1,329(H) x 1,049(V)
Scanning System	Progressive
Min. Illumination	Color : 0.3 Lux (F1.2, 50IRE), 0.005 Lux (Sens up 60X), B/W : 0Lux (F1.2, 50IRE, IR LED ON)
S / N Ratio	50dB
Video Output	CVBS : 1.0 Vp-p / 75Ω composite, 704x480(N), 704x576(P), for installation
LENS	
Focal Length (Zoom Ratio)	3~8.5mm (2.8X) Motorized Vari-focal
Max. Aperture Ratio	F1.2
Angular Field of View	H: 94°(Wide)~69.86°(Tele), V: 32.9°(Wide)~24.92°(Tele)
Focus Control	Remote control via network (Manual, One-shot AF)
Lens Type	DC Auto Iris
Mount Type	Board-in type
PAN / TILT / ROTATE	
Pan Range	0° ~ 355°
Tilt Range	0° ~ 90°
Rotate Range	0° ~ 355°
OPERATIONAL	
IR LED	15 ea
Viewable Length	50ft
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / BLC / HLC
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNRIII (2D+3D Noise filter) (Off / On)
Motion Detection	Off / On (4 programmable zones)
Privacy Masking	Off / On (12 programmable zones)
Sens-up (Frame Integration)	Off / Auto (2X ~ 60X)
Gain Control	Off / Low / Medium / High / Manual
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Auto / A.FLK / Manual (1/30 ~ 30,000sec)
Flip / Mirror	Off / On
Intelligent Video Analytics	Scene Change, Virtual Line, Enter/Exit, Appear / Disappear
Alarm I/O	Input 1ea / Output 1ea (Relay)
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MPEG4, MJPEG
Resolution	1280 x 1024, 1280 x 720P(HD), 1024 x 768, 800 x 600, 640 x 480, 320 x 240
Max. Frame rate	22fps (1280 x 1024), 30fps (720P HD)
Video Quality Adjustment	H.264/MPEG4 : Compression Level, Target Bitrate Level Control, MJPEG : Quality Level Control
Bitrate Control Method	H.264/MPEG4 : CBR or VBR, MJPEG : VBR
Streaming Capability	Multiple Streaming (Up to 10 Profiles)
Audio I/O	Mic/Line in , Line out
Audio Compression Format	G.711 u-law
Audio Communication	2-Way
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1 / v2C / v3 (MIB-2), ARP, DNS, DDNS, ONVIF
Security	HTTPS(SSL) Login Authentication, Digest Login Authentication, IP Address Filtering
Streaming Method	Unicast / Multicast
Max. User Access	10 users at Unicast Mode
Memory Slot	SD/SDHC Memory Slot
ONVIF Conformance	Yes
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatia, Hungary, Greek
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS, Supported Browser : Internet Explorer 6.0 or Higher, Firefox, Google Chrome, Apple Safari
Central Management Software	NET-i viewer
ENVIRONMENTAL	
Operating Temperature / Humidity	-40°C ~ +50°C (-40°F ~ +122°F) / ~ up to 100%
Ingress Protection	IP66 Grade (Waterproof)
ELECTRICAL	
Input Voltage / Current	12V DC, 24V AC, PoE (IEEE802.3af)
Power Consumption	Max. 9W or 650mA (Heater Off), Max. 13W or 800mA (Heater On); Heaters work on 24VAC only
MECHANICAL	
Color / Material	Body : Ivory / Aluminum
Dimensions (WxH)	Ø160 x 134.5mm (Ø6.3" x 5.3")
Weight	1.4Kg (3.09 lb)