# **STI Fire Series** Stopper<sup>®</sup> Station









SS-2002F

## PRODUCT OVERVIEW

This STI Stopper Station with a patented design is a highly advanced push button unit that is ADA Compliant and UL Listed to U.S. and Canadian safety standards. Model SS-2000F is designed specifically to complement fire alarm systems of the 21st century. Operation includes Push-to-Activate and Key-to-Reset. The unit incorporates quality features throughout, including raised lettering molded into its polycarbonate housing.

If you wish, you can protect your fire Stopper Station with a super tough STI cover to help stop vandalism or accidental damage. The Mini Stopper® II cover can be ordered with an optional pre-alarm to help stop malicious activation for inside applications. Outside applications require a Mini Weather Stopper® to be mounted over the Stopper Station button to maintain UL Approval.

## **FEATURES**

- · ADA Compliant and UL Listed to U.S. and Canadian safety standards for outdoor and indoor use.
- · Stainless steel backplate with ground
- · SS-2000F has two replaceable N.O., SPST gold-plated contact blocks rated for 1 amp @ 250 VDC.
- · SS-2002F has two Form "C" contacts rated 125/250 VAC, 10A, 1/2 HP, 30 VDC, 6A.
- · Polycarbonate complies with FDA regulations for food contact applications.
- · Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- · Add a tough STI cover to protect against vandalism, accidental damage or weather.
- · When using an STI Stopper Station outdoors, UL requires unit to be protected with an STI UL Listed Weather Stopper®.
- · Patented design helps stop accidental activation.
- · Super tough housing.
- · Cover available for indoor use, with a built-in alarm to help stop malicious activation.
- · Simple Push-to-Activate and Key-to-Reset operation.
- Raised letters and symbols molded into housing.
- · Lifetime guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).



# STI Fire Series Stopper® Station

Dimensions and Technical Information

# **MODELS AVAILABLE**

SS-200\* F
SS-201\* F
Button Push-to-Activate Key-to-Reset
Button with Bopper Stopper® cover
Button with Mini Stopper® II cover with no horn - flush mount
SS-204\* F
Button with Mini Stopper II cover with horn - flush mount
Button with Mini Weather Stopper® cover - flush mount
SS-206\* F
Button with Mini Weather Stopper cover - surface mount
Button with Mini Stopper II cover without horn with spacer

Button with Mini Stopper II cover with horn with spacer

### \* NOTE: Last digit of part number choose:

"0" for Push, Key-To-Reset (Octogon)

"2" for Push, Key-To-Reset (Mushroom)

For complete cover information, see spec sheet on the specific cover

#### Accessories


3.25 in


(82mm)

PUSH

SS-208\* F

SUB-102722-R
19030
One extra key for 2000F model
18061
One extra key for 2002F model
10196
N.O. contact for 2000F model
10197H
Contact holder for "0" button only
10198
N.C. contact for 2000F model
SUB-71100A-R



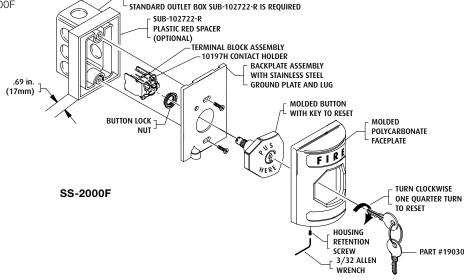

APPROVALS & WARRANTY

It has been tested and approved or listed by:

· Canadian Underwriter Laboratories Issue File No. S2466

Please note that it is mandated by UL that your STI Stopper

Station be protected with an STI UL Listed Weather Stopper® or

Lifetime guarantee against breakage of polycarbonate in normal use (one year on electro mechanical and electronic components).

· California State Fire Marshal approval 7150-1416:102

Mini Weather Stopper® cover when used outdoors.


· Underwriter Laboratories File No. S2466

**TESTING** 

· ADA Compliant

STANDARD SINGLE OUTLET BOX

NOTE: TO MOUNT STOPPER STATION SS-2000F ON A



SS-2002F



Unit 49G Pipers Road Park Farm Industrial Estate Redditch, Worcestershire B98 OHU England Tel: 44 (0) 1527 520 999 Fax: 44 (0) 1527 501 999 Free: 0800 085 1678 (UK) www.sti-europe.com