IF2



The IF2 32 point "FIRE ALARM TERMINAL CABINET" is designed to enhance your fire alarm systems. Ideally suited for trouble shooting and maintenance with easy identification of system wiring.

This surface mount cabinet is fabricated from 16 gauge steel with a durable, baked on, red textured powder coat finish. White 2" highly visible lettering and a "lift-a-way" hinged door contribute to fast cabinet location and access. The door incorporates a high security CAT 30 keyed door lock. The IF2 is UL listed for life safety.

Standard Features:

- Dimensions:
- 14" wide x 14" high x 3 1/4" deep
- 16 gauge steel construction
- Removable Back Plate
- Durable red textured finish
- White 2" indelible lettering
 - "FIRE ALARM TERMINAL CABINET"
- Lift-a-way hinge with CAT 30 keyed door lock
- Terminals have Built-in Test Point w/o removing wires
- Field identification label inside cover
- 1/2", 3/4", 1", 1 1/2" and 2" EMT knockout clusters
- 8 4 Circuit TTS (tool less) terminal strips
- Terminal points rated for 12 gauge wire
- Terminal strips rated for 20 amp max
- 250V (Class B/UL) 300V (CSA)



FIRE

ALARM

TERMINAL

CABINET






ACESON.

Space Age Electronics, Inc. www.1sae.com 800.486.1723 Voice 508.485.0966 Direct



Description:

The **IF2 Point Terminal Cabinet** is constructed of 16 gauge (.062 thick) cold rolled steel and finished with a durable red textured, heat-resistant baked-on enamel finish. The front cover is engineered with a removable formed lift-a-way hinge and displays "FIRE ALARM TERMINAL CABINET" in 2" white screened indelible lettering. A CAT 30 keyed door lock secures the front cover. The interior of the box has field identification labels on the inside cover corresponding to the terminal strip's labeling inside the back box. Overall dimensions measure 14" wide by 14" high by 3 1/4" deep. The cabinet includes 1/2", 3/4", 1", 1 1/2" and 2" EMT knockout clusters on the top, bottom and left side. Interior multiple 4 circuit TTS terminal strips are rated for 12 gauge wire and 20 Amp max 250V (Class B/UL) 300V (CSA).

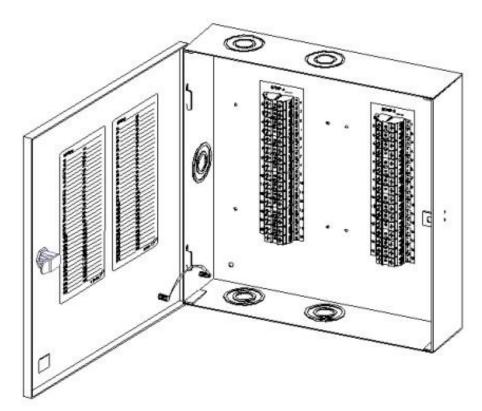

SAE 's Tooless Terminal Strip PN Description

SSU00470 TTS Black SSU00471 TTS White

Included in IF2





Ordering Information:

Part #

Description

SSU00660

Space Age Electronics, Inc. www.1sae.com 800.486.1723 Voice 508.485.0966 Direct 508.485.4740 Fax IF2 32 Point Integration Cabinet