

STI Horn/Strobe Damage Stoppers®



STI-1210B



STI-1221E



STI-1217



STI-1225



PRODUCT OVERVIEW

These virtually indestructible covers (slotted for horn or speaker units and solid for strobe-only alarms) are designed to stop vandalism and accidental damage. Molded of clear, thick, UV-stabilized polycarbonate material, they are backed by a lifetime guarantee against breakage in normal use. Slots in the STI-1210, 1215, 1217 and 1219 allow the horn to be heard. The STI-1221, 1225, 1227 and 1229 are for strobes only. Many tough, clear spacers are available for larger strobe/horn units, retrofits, surface-mount and weather resistant applications. For the STI-1210/1221 series, spacer A has a four inch deep enclosed backbox, spacer B has an enclosed backbox molded with an integral double-gang outlet box. Spacer C has an open back for retrofit applications. Spacer D accommodates deeper units and applications with exposed conduit electrical connections. Spacer E has an open back frame for flush-mount applications. An appliance mounting plate comes with the STI-1219/1229. Unique Enviro Kits are available for extreme conditions where dampness or water is present.


FEATURES

- Helps prevent accidental and intentional damage or vandalism.
- Enviro Kit available for harsh conditions.
- Various backbox and spacer depths are available to accommodate special applications.
- Covers are UV-stabilized.
- See chart for light and sound loss information.
- Typical working properties of polycarbonate are -40° to 250°F (-40° to 121°C).
- Easy access for service.
- See STI-1229HTR heated NEMA 4X enclosure for strobes in freezing conditions.
- Lifetime guarantee against breakage of polycarbonate in normal use.


STI Horn/Strobe Damage Stoppers®

MODELS AVAILABLE

STI-1210A	Horn/Strobe Damage Stopper cover and enclosed backbox, 4" deep, weather resistant
STI-1210B	Horn/Strobe Damage Stopper cover and enclosed backbox with double-gang outlet box
STI-1210C	Horn/Strobe Damage Stopper cover open backbox with external mounting tabs
STI-1210D	Horn/Strobe Damage Stopper cover and open backbox with conduit knockout
STI-1210E	Horn/Strobe Damage Stopper cover and open backbox for flush mount
STI-1221A	Strobe Damage Stopper cover and enclosed backbox, 4" deep, weatherproof with drain vent, NEMA 3R
STI-1221A4X	Strobe Damage Stopper cover and enclosed backbox, 4" deep, weatherproof, NEMA 4X
STI-1221B	Strobe Damage Stopper cover and solid enclosed backbox and double-gang outlet box
STI-1221C	Strobe Damage Stopper cover and open backbox with external mounting tabs
STI-1221D	Strobe Damage Stopper cover and open backbox with conduit knockout
STI-1221E	Strobe Damage Stopper cover and open backbox for flush mount
SUB-84	Tamper resistant screws
SUB-121	Enviro Kit for D and E models
SUB-122	Enviro Kit for B and C models
SUB-06297D	"D" spacer only
SUB-06297E	"E" spacer only
STI-1283	Backplate for "D" and "E" models
19038	Bit for tamper resistant screws
SUB-6297B20	3/4" conduit hub for "B" and "C" backbox outdoor rated)




STI-1210




STI-1221


STI-1210 Series Horn/Strobe Covers				STI-1221 Series Strobe Covers			
Spacer	H	W	D	H	W	D	
A	8.5 in. (216mm)	6.5 in. (165mm)	6.25 in. (159mm)	8.5 in. (216mm)	6.5 in. (165mm)	6.25 in. (159mm)	
B	8.5 in. (216mm)	6.5 in. (165mm)	3.5 in. (89mm)	8.5 in. (216mm)	6.5 in. (165mm)	3.5 in. (89mm)	
C	8.5 in. (216mm)	6.5 in. (165mm)	4.75 in. (120mm)	8.5 in. (216mm)	6.5 in. (165mm)	4.75 in. (120mm)	
D	8.5 in. (216mm)	6.5 in. (165mm)	5.75 in. (146mm)	8.5 in. (216mm)	6.5 in. (165mm)	5.75 in. (146mm)	
E	8.5 in. (216mm)	6.5 in. (165mm)	4 in. (102mm)	8.5 in. (216mm)	6.5 in. (165mm)	4 in. (102mm)	




A SPACER




B SPACER



C SPACER



D SPACER



E SPACER

APPROVALS & WARRANTY

TESTING

- It has been tested and approved or listed by:
- Underwriter Laboratories and Canadian UL File S7025
 - cUL approval for UL 1638 only
 - CSFM needs local approval
 - MEA STI-1210 and STI-1221 series only
 - UL Listed for fire voice speakers for STI-1210 series only
 - ADA Compliant

WARRANTY

Lifetime guarantee against breakage of polycarbonate in normal use.

Performance Review Manufacturer

STI-1210 SERIES	Light Loss %
ADT SECURITY (ADTG1-V Series), EST/EDWARDS (G1-V Series, G1-HV Series, G1-HOV Series, EG1-V Series, EG1-HV Series, EG1-HOV Series), HONEYWELL (XLSG1-V, XLSG1-HV, XLSG1-HOV Series), MIRCOM (MG1-V, MG1-HV, MG1-HOV Series), SIEMENS (G1-V Series), ZITON PTY LTD (ZG1-V Series)	40%
EST/EDWARDS (2440S, 202 Series), HONEYWELL (XLS202 Series), MIRCOM (MS Series), MIRTONE (MG1-V Series), SIEMENS (202 Series)	43%
AMESCO-(SL24W-153075 CLEAR, A, B, G or R, SL24C-3075110 A, B, G or R, CSL24W-A, B, G or R, CSL24C-A, B, G or R), MIRCOM (FS-240), POTTER ELECTRIC (AS-24-153075R, AS-24-153075W)SYSTEM SENSOR (SS24110ADA)	47%
SYSTEM SENSOR (P2, PC2, P4, PC4, SX, SC)	53%
STI-1221 SERIES	
AMESCO-(SL24W-153075 CLEAR, A, B, G or R, SL24C-3075110 A, B, G or R, CSL24W-A, B, G or R, CSL24C-A, B, G or R), MIRCOM (FS-240), POTTER ELECTRIC (AS-24-153075R, AS-24-153075W)	26%
DETECTION SYSTEMS (GES24 Series), GENTEX (GES24 Series), HARRINGTON SIGNAL (GES24 Series), NATIONAL TIME & SIGNAL (GES24 Series), SECUTRON (GES24 Series)	31%
ADT SECURITY (ADTG1-V Series), EST/EDWARDS (G1-V Series, G1-HV Series, G1-HOV Series, EG1-V Series, EG1-HV Series, EG1-HOV Series), HONEYWELL (XLSG1-V Series, XLSG1-HV Series, XLSG1-HOV Series), MIRCOM (MG1-V, MG1-HV, MG1-HOV Series), SIEMENS (G1-V Series), ZITON PTY LTD. (ZG1-V Series)	34%
AMESCO (SL24W-153075), SYSTEM SENSOR (SS24110ADA)	37%
EST/EDWARDS (2440S, 202 Series), HONEYWELL (XLS202 Series), MIRCOM (MS Series), MIRTONE (MG1-V Series), SIEMENS (202 Series)	45%
FARADAY LLC (2700)	57%
SYSTEM SENSOR (P2, PC2, P4, PC4, SX, SC)	61%

Use of horn/strobe cover on audible device decreases the sound output by 6dB(A).

SPACER	DESCRIPTION
A	Enclosed backbox, 4" deep (includes neoprene gasket)
A4X	Enclosed backbox, 4" deep NEMA 4X (includes silicone gasket)
B	Enclosed backbox with double-gang outlet box
C	Open backbox with external mounting tabs
D	Open backbox with conduit knockout
E	Open backbox for flush mount


STI Stopper® Dome

Dimensions and Technical Information


MODELS AVAILABLE

STI-1215	Stopper Dome for Horn/ Speaker/Strobe for flush mount
STI-1217	Stopper Dome for Horn/ Speaker/Strobe with open backbox
STI-1219	Stopper Dome for Horn/ Speaker/Strobe with enclosed backbox
STI-1225	Stopper Dome for Strobe only flush mount
STI-1227	Stopper Dome for Strobe only with open backbox
STI-1229*	Stopper Dome for strobe only with enclosed backbox, NEMA 4X
STI-1212	Spacer kit
STI-1222	Enclosed backbox for Stopper Dome
STI-1284	Single Gang Mounting Adapter for STI-1219 and STI-1229
SUB-84	Tamper resistant screws
SUB-123	Enviro Kit includes three gaskets
19038	Bit for tamper resistant screws


*Hazardous models available. See STI-1229.




STI-1215 / STI-1225



STI-1217 / STI-1227



STI-1219 / STI-1229

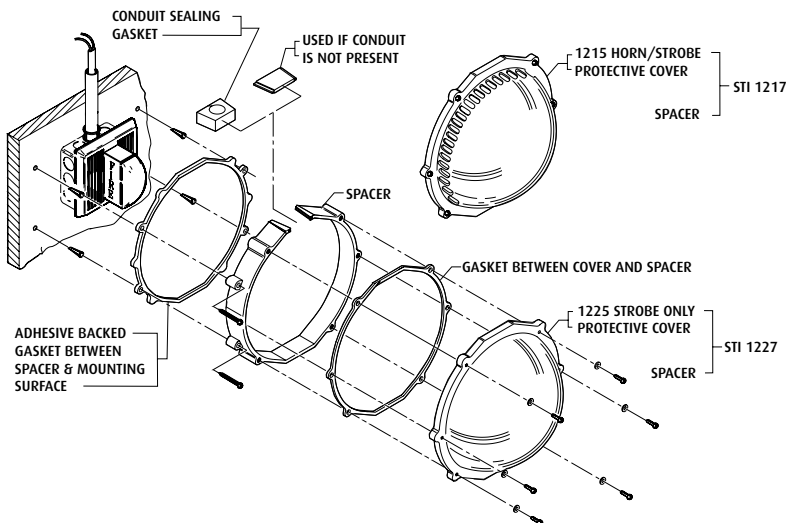

APPROVALS & WARRANTY

TESTING

It has been tested and approved or listed by:

- Underwriter Laboratories and Canadian UL File S7025
- cUL approval for UL 1638 only
- CSFM needs local approval
- For hazardous applications in Canada, to meet cUL, your strobe must be ULC Listed
- ADA Compliant

WARRANTY

Lifetime guarantee against breakage of polycarbonate in normal use.

Performance Review Manufacturer

STI-1215/17/19 SERIES	Light Loss %
ADT SECURITY (ADTG1-V Series), EST/EDWARDS (G1-V Series, G1-HV Series, G1-HOV Series, EG1-V Series, EG1-HV Series, EG1-HOV Series), HONEYWELL (XLSG1-V Series, XLSG1-HV Series, XLSG1-HOV Series), MIRCOM (MG1-V Series, MG1-HV Series, MG1-HOV Series), MIRTONE (MG1-V Series), SIEMENS (G1-V Series), ZITON PTY LTD (ZG1-V SERIES)	20%

AMSECO (SL24W-153075), AMSECO-COLORED LENSES (SL24W-153075 A, B, G or R, SL24C-3075110 A, B, G or R, CSL24W-A, B, G or R, CSL24C-A, B, G or R), MIRCOM (FS-240), POTTER ELECTRIC (AS-24-153075R, AS-24-153075W)	22%
---	-----

FARADAY (2700), SIEMENS (U-MCS Series)	23%
--	-----

DETECTION SYSTEMS (GES24 Series, GES24-15/75), GENTEX (GES24 Series, GES224-15/75), HARRINGTON SIGNAL (GES24 Series, GES24-15/75), NATIONAL TIME & SIGNAL (GES24 Series, GES24-15/75), SECUTRON (GES24 Series, GES24-15/75)	27%
---	-----

SYSTEM SENSOR (SS24110ADA)	26%
----------------------------	-----

EST/EDWARDS (2440S Series, 202 Series), HONEYWELL (XLS202 Series), MIRCOM (MS Series), SIEMENS (202 Series)	33%
---	-----

WHEELock (RSS-24MCW)	34%
----------------------	-----

WHEELock (RSS-24MCC)	36%
----------------------	-----

SYSTEM SENSOR (P2, PC2, P4, PC4, SX, SC)	39%
--	-----

STI-1225/27/29 SERIES

SYSTEM SENSOR (P2, PC2, P4, PC4, SX, SC)	28%
--	-----

WHEELock (RSS-24MCW)	31%
----------------------	-----

ADT SECURITY (ADTG1-V Series), EST/EDWARDS (G1-V Series, G1-HV Series, G1-HOV Series, EG1-V Series, EG1-HV Series, EG1-HOV Series), HONEYWELL (XLSG1-V Series, XLSG1-HV Series, XLSG1-HOV Series), MIRCOM (MG1-V Series, MG1-HV Series, MG1-HOV Series), MIRTONE (MG1-V Series), SIEMENS (G1-V Series), ZITON PTY LTD. (ZG1-V SERIES)	32%
---	-----

FARADAY (2700), SIEMENS (U-MCS Series)	33%
--	-----

EST/EDWARDS (2440S Series, 202 Series), HONEYWELL (XLS202 Series), MIRCOM (MS Series), SIEMENS (202 Series)	34%
---	-----

WHEELock (RSS-24MCC)	35%
----------------------	-----

SYSTEM SENSOR (SS24110ADA)	36%
----------------------------	-----






AMSECO (SL24W-153075), AMSECO-COLORED LENSES (SL24W-153075 A, B, G or R, SL24C-3075110 A, B, G or R, CSL24W-A, B, G or R, CSL24C-A, B, G or R) SCM24W), DETECTION SYSTEMS (GES24 Series, GES24-15/75), GENTEX (GES24 Series, GES224-15/75), HARRINGTON SIGNAL (GES24 Series, GES24-15/75), HONEYWELL (XLSG1-HOV Series), MIRCOM (FS-240), NATIONAL TIME & SIGNAL (GES24 Series, GES24-15/75), POTTER ELECTRIC (AS-24-153075R, AS-24-153075W), SECUTRON (GES24 Series, GES24-15/75)	37%
--	-----

Sound loss for STI-1215, 1217 and 1219

Horns: Amseco Audible Horn Sounders - 6.2 dBA

Speakers: Siemens Adapter Series (0.5, 1, or 2 watt taps only) - 4.1 dBA

STI Horn/Strobe Damage Stoppers®

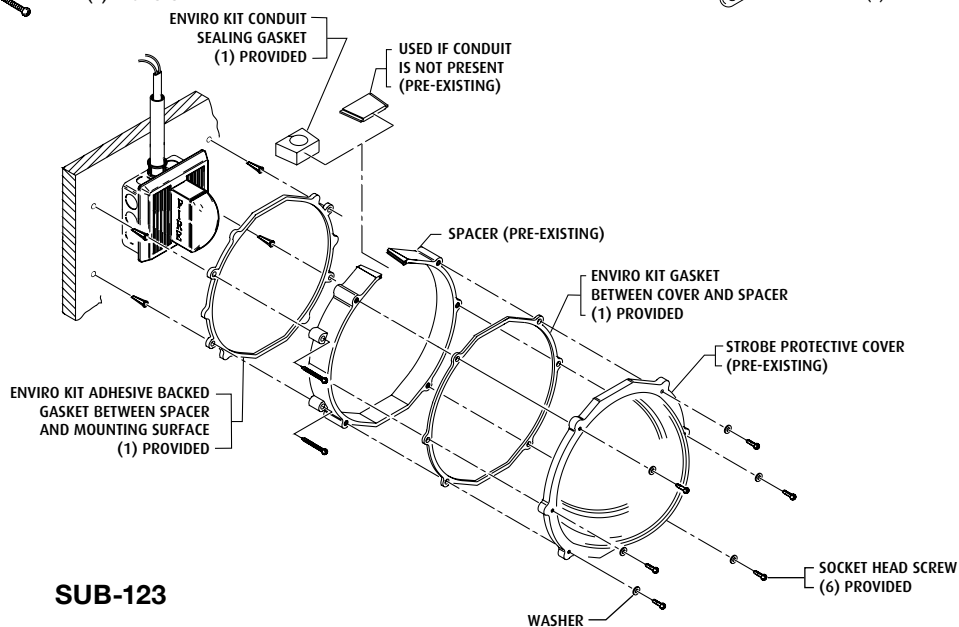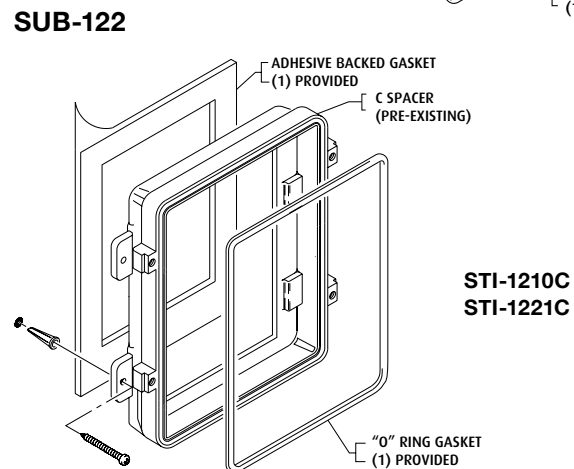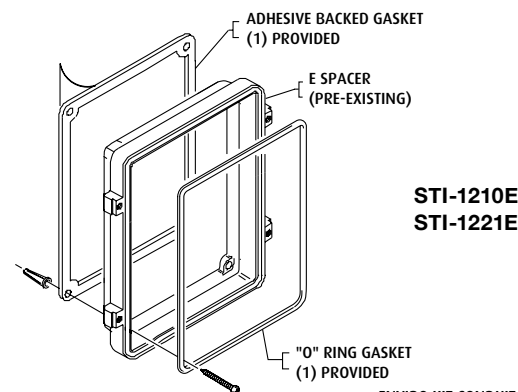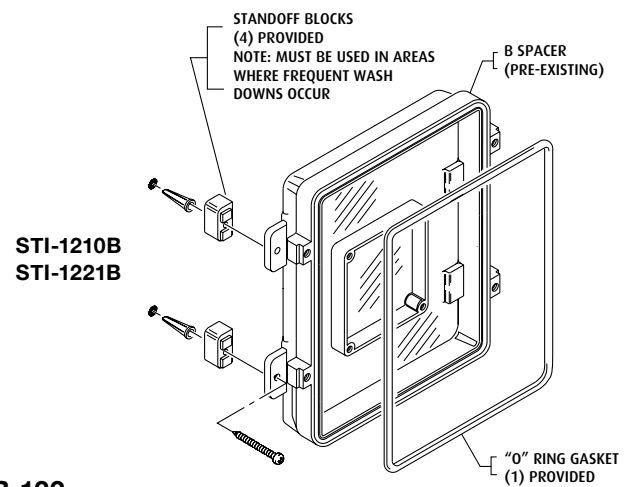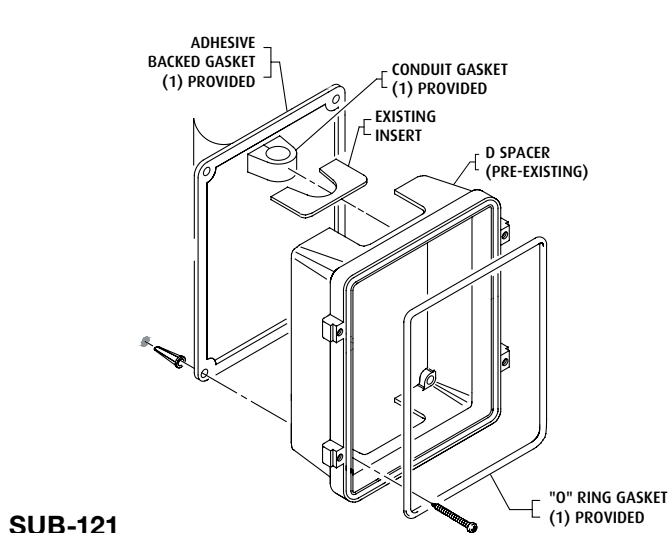

**Safety Technology
International, Inc.**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
Tollfree: 800-888-4STI
info@sti-usa.com
www.sti-usa.com

Unit 49G Pipers Road
Park Farm Industrial Estate
Redditch, Worcestershire
B98 0HU England

Tel: 44 (0) 1527 520 999
Fax: 44 (0) 1527 501 999
Free: 0800 085 1678 (UK)
www.sti-europe.com