

V1750NIR

IR Vandal-Resistant Dome CAMERA




Features

- 1/3 inch Sony Super HAD CCD
- High Resolution : 380 TV Lines
- Built-in Fixed Lens (f=3.8mm)
- Auto White Balance
- AGC, BLC, Flickerless (On/Off)
- Motion Detection
- Privacy Zone
- **24EA IR LED, 1EA Sensor**
- **Min. Illumination : Night (0.00 Lux, IR LED On)**
- Extra Video Out Port for Installer
- 3-Axis Camera Construction
- Built-in Heater (Option), Camera Bracket (Option)
- Diameter of Bubble : 100mm



DIMENSIONS

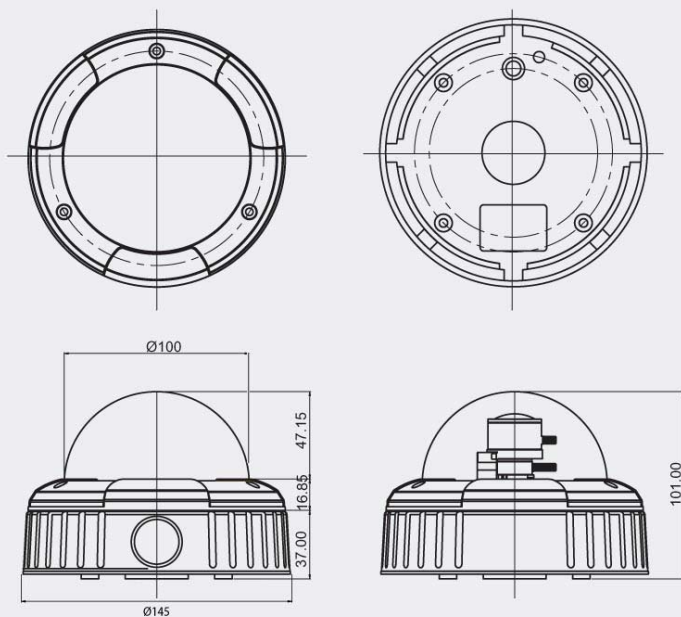

SPECIFICATIONS

Model	V1750NIR
Signal System	NTSC
Scanning System	2:1 Interlace
Scanning Frequency (H)	15.734 KHz
Scanning Frequency (V)	59.94 Hz
Image Sensor	1/3 Inch SONY Super HAD CCD
Total Pixels	537 (H) x 505 (V) 270K
Total / Effective Pixels	510 (H) x 492 (V) 250K
Horizontal Resolution	380 TV Lines
Video Output	1.0V p-p (75Ω, Composite)
S/N Ratio	More than 50dB(AGC Off)
IR LED & Sensor	Built in 24EA IR LED (850nm, 30°) & 1EA Sensor
IR Visible Range	Max. 15m
Lens	Fixed Lens (f=3.8mm)
Min.Illumination	Day (0.3 Lux), Night(0.00 Lux, IR LED On)
White Balance	Auto
AGC,BLC,Flickerless	On/Off (Dip Switch)
OSD	On/Off
Privacy Zone	On/Off(4 Programmable Zone)
Motion Detection	On/Off(64 Programmable Zone)
Shutter Speed	1/60~1/100,000 Sec.
Supplied Voltage	12VDC
Dimensions(ØxH)	100.0 x 101.0 mm
Weight	Approx. 844g