




Features

- 1/3 inch High Sensitivity CCD
- High Resolution : 550 TV Lines
- Built-in DC Iris Vari-focal Lens (f=2.8~10.5mm)
- 2x Digital Zoom
- TDN(ICR), DSS, OSD
- AWB, AGC, BLC, Flickerless (On/Off)
- Min : 0.0003Lux (DSS On, B/W)
- SDNR (Super Digital Noise Reduction)
- Privacy Zone, Mirror Function
- Eclipse Function (On/Off)
- RS485(Pelco-D) Interface
- Extra Video Out Port for Installer
- 3—Axis Movement for Free Lens Rotation
- Vandal-Resistant Dome Housing

DIMENSIONS

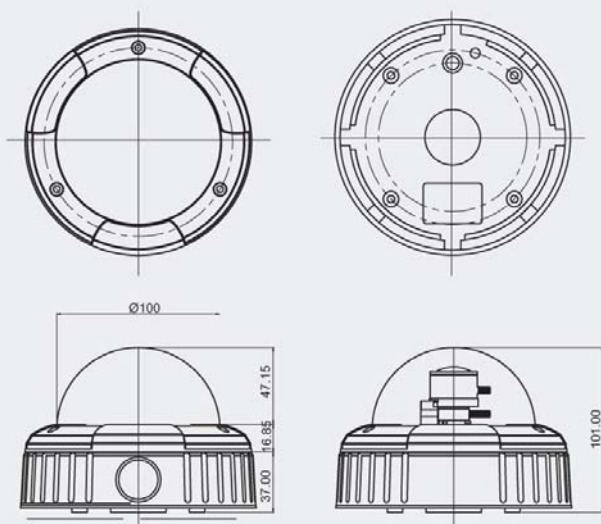

SPECIFICATIONS

Model	V1862NVF	V1862PVF
Signal System	NTSC	PAL
Scanning System	2:1 Interlace	
Sync. System	Internal	
Image Sensor	1/3 Inch High Sensitivity CCD	
Total Pixels	811(H) x 508(V) 410K	795(H) x 596(V) 470K
Effective Pixels	768(H) x 494(V) 380K	752(H) x 582(V) 440K
Horizontal Resolution	550 TV Lines	
Video Output	Composite: 1.0V p-p, 75Ω, Unbalanced	
S/N Ratio	More than 50dB(AGC Off)	
Lens	DC Iris Vari-focal Lens (f=2.8~10.5 mm)	
Min. Illumination	Day (0.3 Lux), Night (0.1 Lux), DSS (0.0003 Lux)	
OSD	On/Off	
Digital Zoom	2x	
Day&Night Type	Electronic Sensitivity-up (DSS), ICR(AGC Type)	
Digital Slow Shutter	Max. 128FLD (On/Off)	
White Balance	AUTO	
AGC,BLC,Flickerless	On/Off	
Eclipse Function	On/Off	
Digital Noise Reduction	Auto	
Privacy Zone	4 Area	
Motion Detection	5 Zone	
Mirror Function	On/Off	
Shutter Speed	1/60~1/120,000 Sec.	1/50~1/120,000sec.
Supplied Voltage	DC 9V~ 15V (Recommendation DC12±0.5V)	
Power consumption	Max. 1.8W / 150mA	
Heater (Option)	Operation Temperature : Under 10℃	
Dimensions(ØxH)	100.0 x 101.0 mm	
Weight	Approx. 844g	