

V660B-312IR Weatherproof Analog 3-12 mm Bullet Camera



- Day/Night, IR illumination and Wide Dynamic Range
- External remote controller for setup of motorized 2.8-12 mm lens
- Privacy masking
- 560 TV lines
- 42 LEDs provide illumination up to 131 feet (40 m)
- 3D Digital Noise Reduction
- Ceiling or wall mounting
- Easy to install and set up

The V660B-312IR weatherproof, bullet camera offers a durable fixed camera with integrated IR illumination. The camera may be mounted on a wall or ceiling. Day/Night, Infrared Illumination (IR) and WDR are standard as is 3D DNR. NTSC and PAL versions are available.

Camera and Optics Provide Outstanding Performance and Value

The V660B-312IR includes an integral camera and lens. A 2.8-12 mm varifocal lens provides superb sharpness and excellent sensitivity. The camera has a 1/3-inch color Sony® Super HAD™ II CCD device with a resolution of 560 TV lines.

Built in 3D digital noise reduction improves image quality, minimizes video interference and triggering of false alarms and provides a better compression ratio, which decreases storage requirements. WDR improves detail in bright and low light areas of the image.

Durable Construction and Easy Installation

The V660B-312IR is constructed of aluminum with an IP66 rating. Tamper-resistant screws make the unit resistant to vandalism. The cameras may be mounted on a wall or ceiling.

The cameras are designed for easy installation and setup. The extensive on-screen display menus allow set up of white balance, AGC, backlight compensation, exposure, titling, privacy masks and many other functions. A remote controller cable is provided and enables remote setup of the camera functions. All wiring is routed through the mount.

The included camera mount is adjustable, allowing for adjustment of pan (180°) and tilt (90° from vertical). The lens zoom and focus can be easily adjusted with the remote control.

Ordering Information

| Description | Model Number |
|---|---------------|
| Outdoor Bullet camera. 2.8-12 mm integral varifocal lens, 1/3-inch day/night, WDR, IR camera with 560 TV Line resolution. 12 VDC/24 VAC. | V660B-312IR |
| Outdoor Bullet camera. 2.8-12 mm integral varifocal lens, 1/3-inch day/night, WDR, IR camera with 560 TV Line resolution. 12 VDC/24 VAC. PAL version. | V660B-312IR-P |

Camera and Optics

| | |
|--------------------------------------|---|
| Image Device: | 1/3-inch Sony Super HAD II CCD |
| Picture Elements: | NTSC: 811 (H) x 508 (V), 410,000 pixels PAL: 795 (H) x 596 (V), 470,000 pixels |
| Scanning Frequency: | NTSC: 15.734 KHz (H) x 60 Hz (V) PAL: 15.625 KHz (H) x 50 Hz (V) |
| Scanning System: | 2:1 interlace |
| Synchronization: | Internal/Line Lock |
| Shutter Speed: | NTSC: 1/60-1/100,000 sec PAL: 1/50-1/100,000 sec |
| Resolution: | 560 TV lines |
| Sensitivity: | 0.15 fc (1.5 lux) color @ f/1.2 30 IRE 0.00 fc (0 lux) with LEDs on |
| Video Output: | 1.0 V p-p @75 ohms, composite. |
| S/N Ratio: | 50 dB (AGC off). |
| Camera Control: | RS-485 or external remote controller |
| IR LED/Sensor: | 42 LEDs/1 sensor each |
| IR Distance: | Up to 131 feet (40 m) |
| Dynamic Range: | Digital WDR |
| Backlight Compensation: | BLC/HSBLC/Off |
| Sense Up: | Off/Auto (X2 - X128) |
| Privacy Mask: | 8 programmable zones |
| White Balance: | AWB/AWC/Manual/Indoor/Outdoor/ATW |
| Automatic Gain Control (AGC): | Selectable: Off, Low, Middle, High |
| Exposure: | 1/60 (1/50), Flickerless, 1/250-1/100,000 seconds |
| Digital Noise Reduction: | On/Off, 0-50 |
| Digital Zoom: | 0-32 zoom. D-PTZ support enables pan and tilt functionality within zoomed scene. |
| Focal Length : | 2.8-12 mm motorized |
| Aperture: | f/1.4 |
| Field of View: | 2.8 mm: 94.2° H 12 mm: 26.2° H |

Operational

| | |
|--------------------------|---|
| Control Display: | On-screen, menu-driven system allowing full configuration of the camera |
| Lens Adjustment: | External remote control |
| Motion detection: | On/Off |
| Day/Night: | Color/B&W/Auto |
| Effects: | V-Flip (Rotate)/Neg or Pos/Mirror |
| Titling: | Alpha-numeric character set. 8 characters. |

Electrical

| | |
|---------------------------|---|
| Input Voltage: | 12 VDC or 24 VAC |
| Current: | 0.46 A @ 12 VDC 0.23 A @ 24 VAC |
| Power Consumption: | 5.5 W |
| Connectors: | Power: 2-pin connector Video: BNC on pendant cable |
| Certifications: | CE, FCC Class A, UL |

Mechanical

| | |
|----------------------|--|
| Application: | Indoor/Outdoor. Ceiling or wall mount |
| Dimensions: | Length: 5.2 inches (132 mm) Length (with mount): 10 inches (252 mm) Diameter: 3 inches (78 mm) |
| Weight: | 2.5 lb (1.1 kg) |
| Construction: | Aluminum. Rated IP66. |


Environmental

| | |
|-------------------------------------|------------------------------------|
| Operating Temperature Range: | 14 to 122° F (-10 to 50° C) |
| Operating Humidity Range: | Up to 90% relative, non-condensing |

Warranty

3 years parts and labor

Dimensional Data

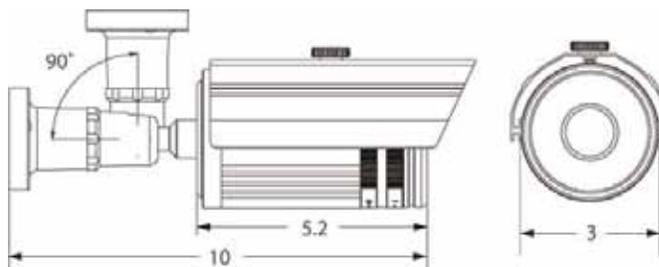

Data Sheet Number: V230-00
Dated: 04/2012

Vicon Data Sheet Part Number: 8009-7230-00-02
Specifications subject to change without notice.

Vicon and its logo are registered trademarks or trademarks of Vicon Industries Inc. Sony and Super HAD are registered trademarks or trademarks of Sony Corporation. Copyright © 2012 Vicon Industries Inc. All rights reserved.