

VM8RM2LCD

Features



- 8.4" Dual LCD Monitors In a Standard 19" Rack Frame
- High resolution / High contrast
- Picture in Picture and PIP Audio can be selected
- Fast response time
- Scale mode. (under / over / 4:3 / 16:9)
- AV1 / AV2 / S-Video / VGA selectable
- 3D Comb Filter / 3D De-interlace
- Remote control for easy operation

Specifications

Button Control	POWER / SOURCE / ADJUST / MENU / AUTO
Display Resolution	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75
Active Area	170.4mm (H) x 127.8mm (V)
Dot Pitch	0.213mm (H) x 0.213mm (V)
Display Ratio	4:3 - Adjustable Scan
Brightness (Central)	250cd/m2 (*1)
Contrast Ratio	600:1
Viewing Angle	Left 89° / Right 89° / Up 89° / Down 89°
Response Time	16ms
Input Voltage	12V DC - Included
Input Signal	1Vp-p composite video
Input Impedance	75 Ohm
Output Impedance	75 Ohm (Auto Termination)
Scanning System	NTSC: 525 lines, 60 fields per sec. PAL: 625 lines, 50 fields per sec.
VGA Input	15 pin D-SUB connector x 1
Video Input / Output	BNC x 2 / BNC x 2 Looping Output Auto Termination
Audio Input (L/R)	Ear Phone x 2
S-Video	4-pin DIN connector x 1
Speaker	1W + 1W
Power Consumption	17.2W
Dimensions	19.05" (W) x 10.41" (H) X 2.94" (D)
Weight	Net. 2.73 lbs. / Gross: 5.2 lbs.



Dimensions

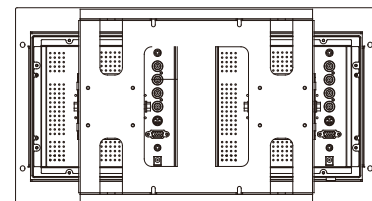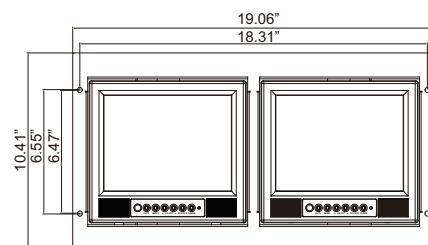

Speco Technologies is constantly developing product improvements.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 6/28/10

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880

www.specotech.com