

Overview



- These units convert a 24VAC or 24VDC input into a regulated 12VDC output.

VR1

- 12VDC @ 1 amp.
- Modular connector/cable assembly facilitates ease of wiring.

VR1T

- 12VDC @ 1 amp.
- Screw terminal block. (Wire Gauge 14-20AWG).

VR2T

- 12VDC @ .5 amp.
- Screw terminal block. (Wire Gauge 14-20AWG).

Specifications


- Converts a 24VAC-24VDC input to a 12VDC output.
- Power LED.
- Electronically filtered and regulated output.
- High impact insulated housing.
- Built-in overload protection.
- Compact design allows for integration in a wide range of camera housings.

Dimensions (approximate): 1.625"L x 2.375"W x 1"H

Applications

- Power for 12VDC CCTV cameras and accessories, Fiber Optic Transmitters, REX PIR's, Prox Readers, etc.

CCTV Applications:

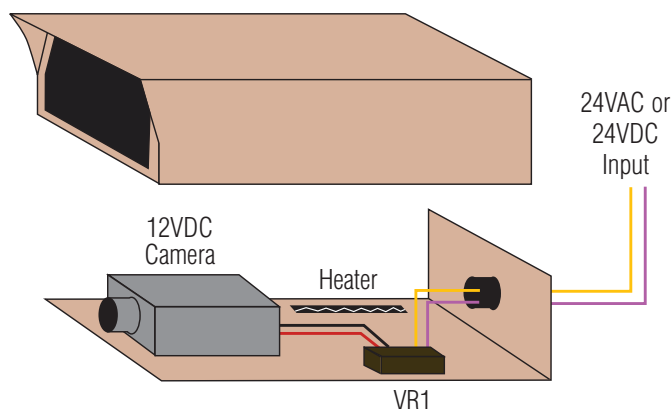

Access Control Applications:

