

SSP System Controller

VSP-3000

- Simple camera control and DVR display switch change available
- Control system supporting SSP / H-SSP and Pelco-D protocols
- Telemetry control (pan/tilt/zoom) via 3-axis joystick and direct keys
- Max. 255 cameras connectable (Max. 127 for SSP)
- Mouse function for PC-base DVR, DSR-HB8000



3-axis joystick

**Compact to conserve space.
Controls surveillance cameras with simple operation.**

Main Features


Centralized camera controls from a single controller

Protocols	Controllable number of cameras
SSP/H-SSP	1 — 127
Pelco-D	1 — 255


Telemetry control using 3-axis joystick (pan/tilt/zoom) and direct button for camera and DVR display switching function

2-line backlit menu display

Mouse function for PC-based DVR, DSR-HB8000

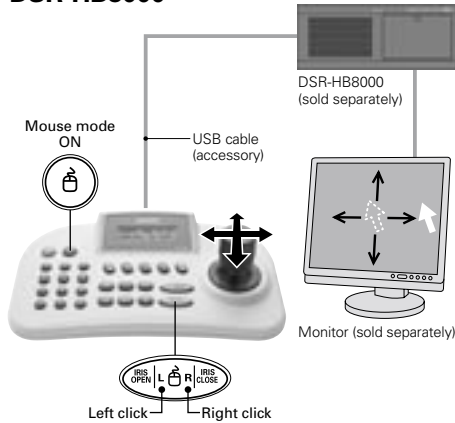

Connection Example

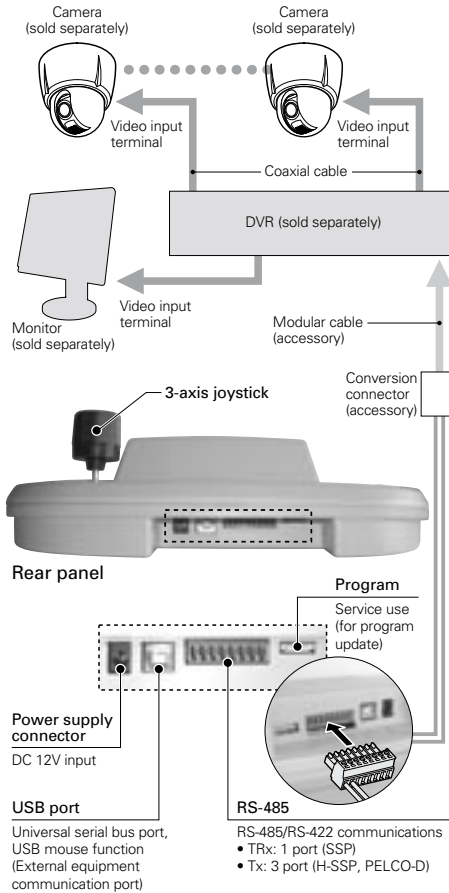

Specifications

Model No.	VSP-3000
Communication method	RS-485, RS-422
Keyboard	29 keys
Joystick	3-axis joystick (pan/tilt/zoom)
Control communication terminal	Tx1, Tx2, Tx3, TRx
Protocol	SSP, H-SSP, Pelco-D
USB mouse port	Compatible with DVRs with mouse function
Communication speed	2400, 4800, 9600, 19200, 38400, 57600 bps
Max. number of connectable units	Total 256 • Cameras: SSP/HSSP: 127 Pelco-D: 255 • Controllers: 5 • Digital video recorders: 99
Operating environment	Temperature: 5° to 40°C Humidity: 80% or lower
Storage environment	Temperature: -20° to 60°C Humidity: 80% or lower
Power supply (AC adapter)	Input voltage: 100 – 240 V AC 50/60Hz Output voltage: 12 V DC
Current consumption	0.2A
Dimensions (W x H x D)	279.7 x 99.7 x 179.6 mm (11.0 x 3.9 x 7.1 in)
Weight	750 g (1.65 lbs.)

Accessories

- AC adapter/power cord x 3
North America: 1
Europe: 1
Great Britain: 1
- USB cable
- Connector
- Modular cable x 1
(Straight type: 300cm)
- Communication conversion connector x 1
- Double-faced tape x 1

NOTE:

Appearance and specifications are subject to change without notice.

SSP Compatible Devices

Cameras

- 1/4" Color CCD High-Resolution AF Zoom Camera
VCC-ZM500P
- 1/4" Color CCD DSP High-Resolution AF Zoom Camera
VCC-ZM600P **[DAY/NIGHT]**
- 1/4" Color CCD DSP High-Resolution Weatherproof AF Zoom Camera
VCC-XZ600P **[DAY/NIGHT]**
- 1/4" Color CCD High-Resolution AF Speed Dome Camera
VCC-9500P E
VCC-9600P E **[DAY/NIGHT]**
VCC-9700P E
VCC-9800P E **[DAY/NIGHT]**


PAN-FOCUS

- 1/4" Color CCD High-Resolution Indoor Mini Dome Camera
VCC-P7575PA + VA-50ST
- 1/4" Color CCD High-Resolution Vandal-Resistant Dome Camera
VDC-DP7585P + VA-50ST
- 1/4" Color CCD High-Resolution Weatherproof Zoom Camera
VCC-XZ200P + VA-20ST
- 1/4" Color CCD High-Resolution PT Indoor Mini Dome Camera
VCC-P9575P
- 1/4" Color CCD High-Resolution Vandal-Resistant PT Dome Camera
VDC-DP9585P

Recorders

- 16ch Digital Video Recorder
DSR-2016
- 1ch Digital Video Recorder
DSR-M810PA
- 4ch Digital Video Recorder
DSR-M814PA
- 1ch Digital Video Recorder with VZU-COM300
DSR-300P
- 6ch Digital Video Recorder
DSR-3706PA
- 9ch Digital Video Recorder
DSR-3709PA
- 16ch Digital Video Recorder
DSR-3716PA
- 9ch Digital Video Recorder
DSR-5709P
- 16ch Digital Video Recorder
DSR-5716P
- 16ch MPEG-4 Hybrid Digital Video Recorder
DSR-HB8000

Dimensions [Unit: mm (inch)]

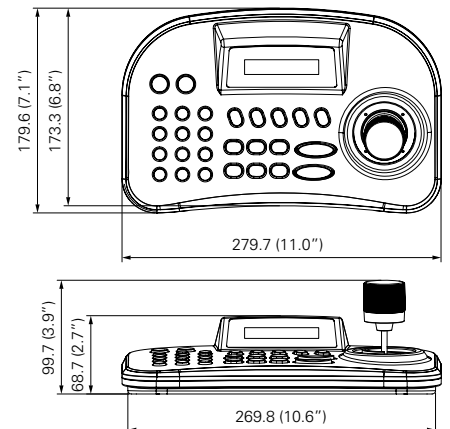

Caution: Please consult the instruction manual to ensure safe and proper operation of the product.



Digital System Company of SANYO Electric Co., Ltd. obtained Quality Management System ISO 9001 and Environmental Management System ISO 14001 certifications.

Distributed by:

SANYO

SANYO Electric Co., Ltd.
Digital System Company
<http://www.sanyosecurity.com>

©2008 SANYO Printed in Japan 2008.3 MA
SMS159