



VT-EHL

4 & 8 Channel H.264 Digital Video Recorders

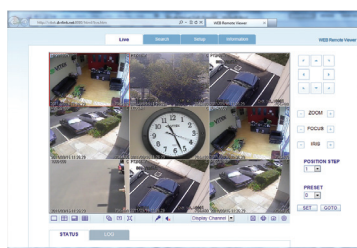


Remote Viewing from anywhere over the Internet using Microsoft Internet Explorer



Remote Viewing Apps Available for both the iPhone, iPad & Android Devices



View backups on PC computers using included Backup Player Software

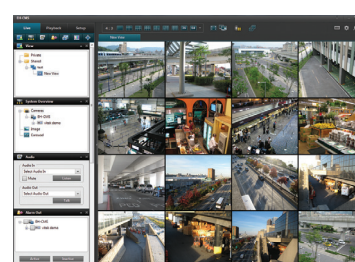

Included CMS Software allows remote viewing & control of multiple DVR's even when located at multiple locations!

FEATURES

- 4 or 8 Video Inputs with 1 Main, 1 Spot Monitor Output and 1 VGA output.
- Real Time Recording with Up to 120 IPS at HD1 Recording / Live Display (VT-EHL4) / 240 IPS at CIF (VT-EHL8)
- H.264 Compression
- Supports both Dynamic and Static IP Addresses
- 4 Alarm & Audio Inputs / 1 Output
- 500GB to 2TB Internal Storage Options
- Remote Viewing over the Internet, LAN, Explorer, Safari, Firefox, Opera and Chrome
- Applications for iPhone, iPad, iTouch and Droid Devices
- "Quick Search" Function for automatic review
- Mac OSX Client & CMS Central Management Software Included
- Automatic sending of Health & Event notifications via email
- Control locally via Front Panel, USB Mouse or with the Included IR Remote control
- PTZ Control over RS-485

Simplicity and reliability is the basis upon which the VT-EHL Digital Video Recorder was conceived. With almost every powerful feature of its predecessor the "EH", the EHL offers an economical option for providing the most advanced recording solution available. As part of the EH family, the VT-EHL is completely compatible with all VITEK EH Platform application software.



VT-EHL8 Rear Connections



VT-EHL16 Rear Connections




Easy setup with the included Quick Installation Guide & Software DVD



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

Detailed Specifications	VT-EHL4	VT-EHL8
Video Input	4 Channels	8 Channels
Video Compression	H.264 Codec	
IPS (Display / Recording)	120 / 120 (HD1)	240 / 240 (CIF)
Operating System	Linux	
Operation Mode	Pentaplex	Pentaplex
Video Output	VGA - 1 SXGA (1280 X1024)	
BNC Output	Monitor: 1 Composite(BNC) / Spot: 1 Composite(BNC)	
Split-Screen	Live: 1, 4, SEQ, Digital Zoom, Covert / Playback: 1, 4	Live: 1,4,6,8,9, SEQ / Playback: 1, 4, 9
Audio In/Out	4 Line In (RCA) / 1 Line Out (RCA), CODEC : G.711 (64Kbps)	
Storage	Up to 1 Internal HDD (SATA)	
Archive	USB Device & Network	
USB Port	1 Front +1 Rear	
System Control	Front Panel, USB Mouse, Included IR Remote Control	
Network	TCP/IP, HTTP, DHCP (DDNS)	
RJ-45 Ethernet Port	10M/100M	
Search	Calendar, Event	
Playback Rate	120fps @ 704x240 60fps @ 704x480	240 fps @ 352x240 120 fps @ 704x240 60 fps @ 704x480
PTZ	1 - RS-485 - Supports most of PTZ protocols with up to 255 Presets	
Point of Sale (POS)	N/A	
Motion Area Setting	Adjustable GRID(16X16), 10 Steps Sensitivity Level	
Recording Resolution Setting	By each camera for different resolution setting(CIF/2CIF/D1)	
Recording Quality Control	4 Levels (Low/Standard/High/Highest)	
Recording Schedule	By hour, by day, by recording mode, By alarm, By Ch	
Panic Record	Overrides all other recording settings to provide the best quality recording	
Pre-recording	Max. 5 seconds	
Post-recording	Max. 180 seconds	
Player	Backup player, Window Media Player and HDD PC Viewer	
E-mail notification	E-mails to specific users to notify events	
System Configuration	Full setup configuration over network	
Bandwidth limit	YES: Adjustable by User	
Two-Way Audio	YES	
Power	12V Adaptor, 3.3A, 100 ~ 220VAC, 50 ~ 60Hz	
Operating Temperature	32° ~ 104°F (0° ~ 40°C)	
Humidity	10 ~ 90% NC	
Case Form Factor	1.3U	
Dimensions	11.375" x 2.375" x 8.75"	



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355