




# PRODUCT SPECIFICATION VIDEO WITH ONE WAY DATA

## VT1500WDM-ULTRAK

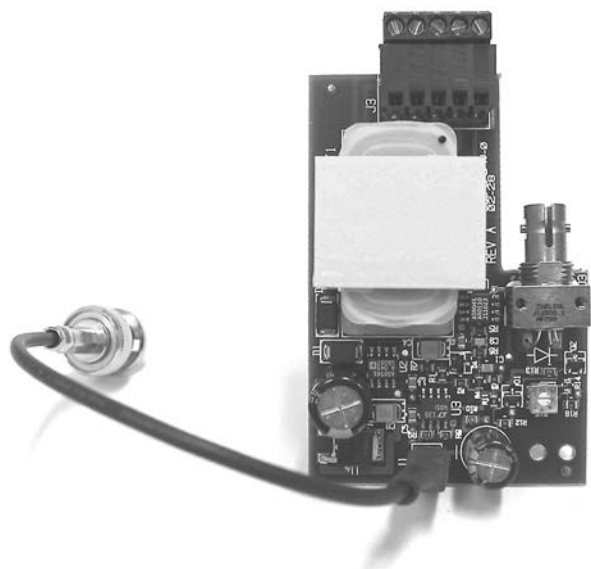

### DESCRIPTION

The IFS VT1500WDM-Ultrak is a miniature video transmitter and data receiver using one multimode fiber optic cable. It plugs directly into the Ultrak KD6™ dome housing. The VT1500WDM-Ultrak has identical performance as the standard VT1500WDM and is compatible with the standard VR1500WDM (R3). Designed for easy and fast installation the VT1500WDM-Ultrak has no external electrical connections and requires no external power.

### FEATURES

- AM Video Transmission
- NTSC, PAL, SECAM Compatible
- Full Color Compatibility
- Compatible with ULTRAK KD6 Dome
- Transparent to Data Encoding
- Full Range Automatic Gain Control (AGC)
- No In-field Electrical or Optical Adjustments Required
- Integrated WDM for Greater Product Reliability
- Distances up to 2.5 miles (4 km) Without Repeaters
- Available in FiberPak™
- Comprehensive Lifetime Warranty



Available at: **www.ifs.com**

- A & E Specifications, (CSI)
- AutoCAD Drawings
- Operation Manuals
- Technical Bulletins

### ORDERING INFORMATION

	PART NUMBER	DESCRIPTION	FIBERS REQUIRED	OPTICAL PWR BUDGET	MAX. DISTANCE*
MULTIMODE 62.5/125µm**	VT1500WDM-Ultrak	Video Transmitter/Data Receiver (850/1310 nm)	1	14 dB	2.5 miles (4 km)
	VR1500WDM	Video Receiver/Data Transmitter (1310/850 nm)			

\* Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels. Distance can also be limited by fiber bandwidth. \*\* For 50/125 Fiber, subtract 4 dB from Optical Power Budget.



# TECHNICAL SPECIFICATION

# VT/VR1500WDM-ULTRAK

## VIDEO WITH ONE WAY DATA

### SPECIFICATIONS

#### VIDEO

Video Input:	1 volt pk-pk (75 ohms)
Bandwidth:	5 Hz - 10 MHz*
Differential Gain:	<5%
Differential Phase:	<5°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	> 55 dB @ 10 dB ATTN.

#### DATA

Data Interface:	RS-232, RS-422
-----------------	----------------

#### WAVELENGTH

850/1310 nm, Multimode

#### NUMBER OF FIBERS

VT1500WDM Series:	1
-------------------	---

#### CONNECTORS

Optical:	ST
Power and Data:	Terminal Block with Screw Clamps
Video:	BNC

### ELECTRICAL & MECHANICAL

Power:	
VT1500WDM-Ultrak:	24VAC
Circuit Board:	Meets IPC Standard
Shipping Weight:	< 1/2 lb./1.23 kg
Size (in.cm.) (LxWxH)	2.375 x 2.25 x .875 in., 8.6 x 5.715 x 2.2 cm

### ENVIRONMENTAL

MTBF:	> 100,000 hours
Operating Temp:	-40° C to +74° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)†

† May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.

• At 6 dB attenuation

### AGENCY COMPLIANCE

**FCC** PART 15 COMPLIANT



### MADE IN THE USA


Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J

### OPTICAL POWER BUDGET

FIBER	WAVELENGTH	TRANSMITTER	RECEIVER	OPTICAL PWR BUDGET	MAX. DISTANCE*
		MODEL	MODEL		
Multimode 62.5/125µm**	850/1310 nm	VT1500WDM-Ultrak	VR1500WDM	14 dB	2.5 miles (4 km)

\* Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels. Distance can also be limited by fiber bandwidth. \*\* For 50/125 Fiber, subtract 4 dB from Optical Power Budget.

### SYSTEM DESIGN

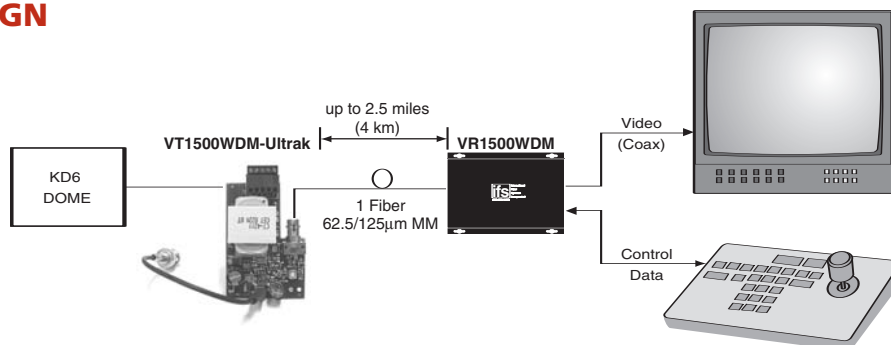

International  
Fiber  
Systems  
Incorporated

TEL (203)426-1180 ■ FAX (203)426-3326 ■ www.ifs.com ■ sales@ifs.com  
16 Commerce Road ■ Newtown, CT 06470

Due to our continued effort to advance technology, product specifications are subject to change without notice.